




contact.leralled@gmail.com

-  P.001-048-----LED Tracklight Series
-  P.049-062-----LED Mini Grille Light Series
-  P.063-074-----LED Linear Light Series
-  P.075-082-----Multiple installation Series
-  P.083-140.....LED Ceiling Downlight Series
-  P.141-148 -----Trimless Ceiling Downlight Series
-  P.149-152 ----- LED Modules Series
-  P.153-164 -----LED Hotel Downlight Series
-  P.165-168 ----- LED Wall Wash Series
-  P.169-182 ----- LED Household Sotre & Recessed Grille Light Series
-  P.183-196 -----LED Downlight Series
-  P.197-212 -----LED Surface/Suspension Lamp Series
-  P.213-216 ----- LED Corner Light Series
-  P.217-218 ----- LED Wall Lamp Series

LED Tracklight
MUSEIS

					
FS4028-30 P005	FS4027-20 P006	FS4029-30 P009	FS4029-20 P009	FS4029-15 P010	FS4013-42 P012
					
FS4012-30 P013	FS4011-15 P013	FS4005-42 P016	FS4006-42 P017	FS4010-22 P017	FS4007-42 P018
					
FS4008-42 P018	FS4001-26 P019	FS4014-25 P022	FS4010E-22 P022	FS1069A-06 P027	FS4015-25 P030
					
FS4019-30 P032	FS4019-20 P032	FS4019-15 P033	FS4019-10 P033	FS4019-06 P034	FS4025-25 P037
					
FS4025-25 P038	FS4023-30 P038	FS4023-20 P039	FS4023-10 P039	FS4020-15 P041	FS4021-08 P044
					
FS4016-20 P047	FS4016-20 P047	FS4016-30 P048			

LED Mini Grille Light
MODULIS

				
FS8005-16 P051	FS8013-08 P055	FS8008-16 P055	FS8030-18 P057	FS8005D-50 P061

LED Linear Light
LIGNIS

					
FS8026-30 P065	FS8028-26 P069	FS8001-25 P070	FS8014-18 P071	FS8015-15 P071	FS8016-15 P071

LED Linear Light
PANNELUM

	
FS8011-10 P072	FS8018B-19 P074

Multiple installation
MUSEIS

	
FS8021 P078	FS9002 P082

LED Ceiling Downlight
EDONIS

					
FS2037-05 P085	FS1075-30 P089	FS1074-20 P090	FS1073-15 P091	FS1064-30 P095	FS1064-20 P096
					
FS1064-15 P096	FS5045-30 P099	FS5045-15 P100	FS5075A-09 P100	FS5088-20 P103	FS5086-20 P103
					
FS5086-11 P104	FS5088-11 P105	FS1014-15 P109	FS1013-09 P109	FS1012-05 P110	FS5071-18 P112
					
FS5073-18 P112	FS5070-30 P115	FS1060-30 P116	FS5041-15 P117	FS5103-09 P118	FS5072-25 P119
					
FS5201-05 P122	FS5040-05 P123	FS5040-02 P123	FS5053-05 P124	FS1022-16 P126	FS5076-14 P126
					
FS1007-09 P127	FS1008-09 P127	FS5075-09 P128	FS1061-09 P130	FS1061B-09 P130	FS5047-13 P119

LED Ceiling Downlight
EDONIS



FS5049-26
P133



FS4010A-12
P135



FS4001A-26
P135



FS5077-15
P138



FS5052-20
P139



FS5051-12
P140

Trimless Ceiling Downlight
EDONIS



FS5093-20
P145



FS5093-09
P145



FS5093-05
P146



FS5093A-20
P147



FS5093A-09
P147



FS5093A-05
P148

LED Modules
EDONIS



FS1059-09
P104



FS1059-15
P105

LED Hotel Down light
EDONIS



FS6001-09
P156



FS6002-09
P156



FS6003-09
P157



FS6004-09
P157



FS6012A-15
P160



FS6012-15
P160



FS6013-50W
P162



FS6010-30
P163



FS6006-20
P163



FS6007-20
P164

LED Wall Wash
EDONIS



FS6011-25
P168



FS5039-12
P168



FS1065-09
P169

LED Household Sotre
EDONIS



FS1062-13
P171



FS1062-20
P172



FS1062-30
P172



FS2018A-35
P174



FS2019A-35
P174



FS2022A-15
P175



FS2023A-15
P176



FS2027A-13
P176



FS2029-16
P177



FS2030-30
P177




FS2026-15
P179




FS2026-10
P180

LED Downlight
CIRCULIS



FS3033-20
P185



FS3032-15
P185



FS3031-10
P186



FS3028-25
P189



FS3028-20
P189



FS3028-12
P190



FS3028-08
P190



FS3002-24
P193



FS3001-19
P193



FS3022-15
P194



FS3021-13
P194



FS3020-10
P195



FS3023-07
P195

LED Suface/
APPLIS



FS3020-40
P199



FS4010B-18
P199



FS3025-18
P200



FS4027A-20
P201



FS4028A-30
P201



FS4019A-30
P202



FS4019A-20
P202



FS4019A-15
P203



FS4019A-10
P203



FS4019A-06
P204



FS4010D-12
P205



FS1069-06
P205



FS3029-09
P207



FS3019-40
P207



FS3024-18
P208



FS4016A-08
P210

LED Corner Light
MURALIS



FS5091-03
P214



FS5092-03
P214



FS5026-02
P215



FS5027-02
P215



FS5094-02
P216

LED Wall Lamp
APPLIS



FS1068-20
P218



MUSEIS




Glare cut angle of
20 degree
20° 防眩光切角




90 degree Adjust
up and down
上下90° 可调角度



355 degree Adjust
Horizontal rotation
水平355° 可调角度

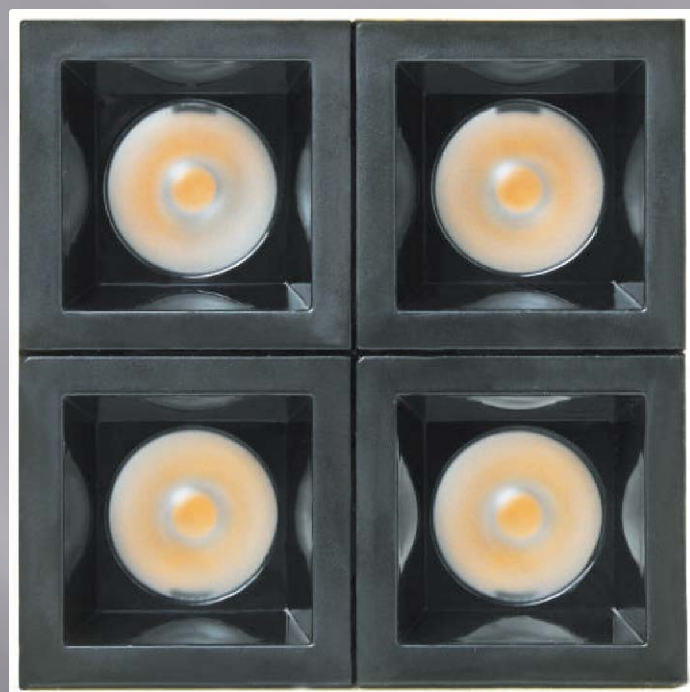

Simple and elegant designed led track light with aluminum die-cast housing, with multiple lens angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens. Application: fashion stores, chain store, shopping mall, showrooms, art galleries.



FS4028-30


Max.30W

Operating Temp. : -30°C + 40°C 6×
(4.5W SMD) chip (DC1500mA)



- 2700K/1800lm Ra90
- 3000K/1950lm Ra90
- 4000K/2242lm Ra80
- 5000K/2550lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS4027-20


Max.20W

Operating Temp. : -30°C + 40°C 4×
(4.5W SMD) chip (DC1500mA)


- 2700K/1200lm Ra90
- 3000K/1300lm Ra90
- 4000K/1500lm Ra80
- 5000K/1710lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection



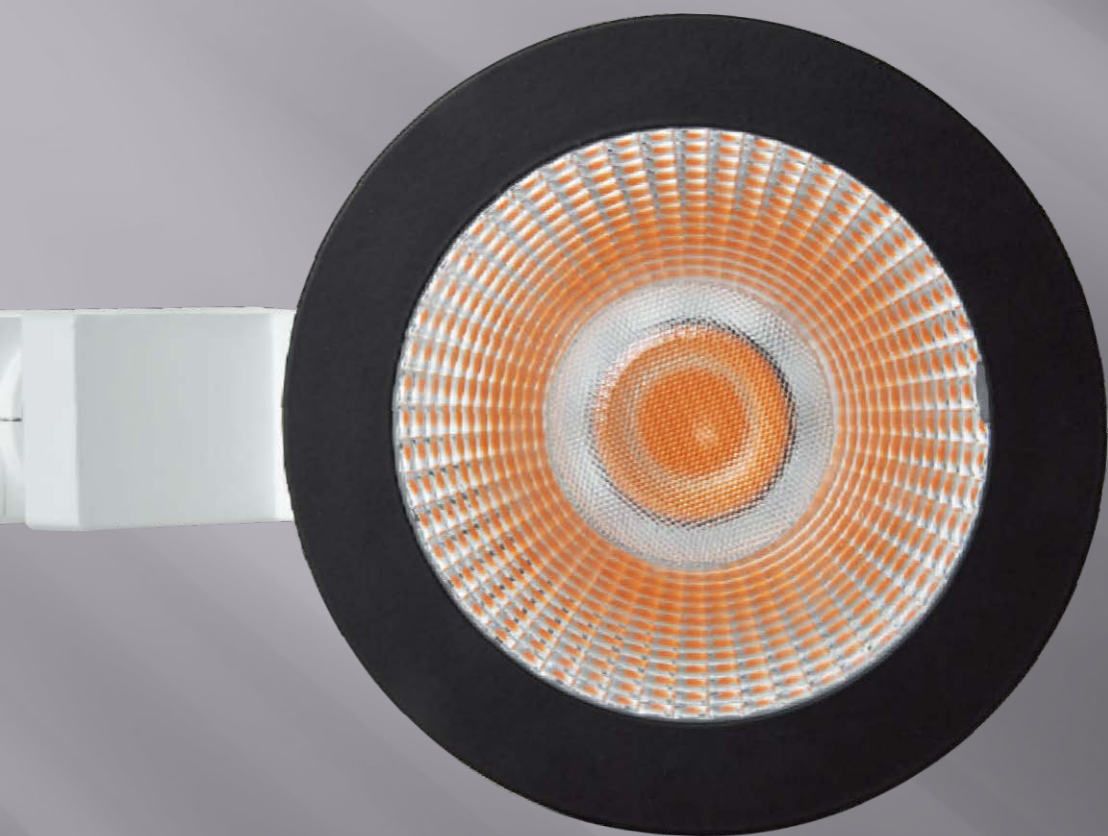



LED TRACK LIGHT SERIES



FS4029-30

Max.30W

Operating Temp. : -30°C + 40°C

26W COB chip (DC700mA)


- 2700K/2100lm Ra90
- 3000K/2400lm Ra90
- 4000K/2760lm Ra80
- 5000K/3120lm Ra70

Remote Driver: AC220-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac

Beam angle



Color selection



FS4029-20

Max.20W

Operating Temp. : -30°C + 40°C

18.5W COB chip (DC500mA)


- 2700K/1400lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70

Remote Driver: AC220-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac


Beam angle



Color selection



LED TRACK LIGHT SERIES



FS4029-15

Max.15W

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1200lm Ra90
- 4000K/1390lm Ra80
- 5000K/1580lm Ra70

Remote Driver: AC220-240V 50/60Hz


Driver performance: Non-dimmable/dimmable


Dimmer: 0~10v/Triac

Beam angle



Color selection





FS4013-42

Max.42W

Operating Temp. : -30°C + 40°C

38W COB chip (DC1000mA)

■ 2700K/2958lm Ra90

■ 3000K/3360lm Ra90

■ 4000K/3696lm Ra80


■ 5000K/4116lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





FS4012-30

Max.30W

Operating Temp. : -30°C + 40°C

26W COB chip (DC700mA)


- 2700K/2107lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

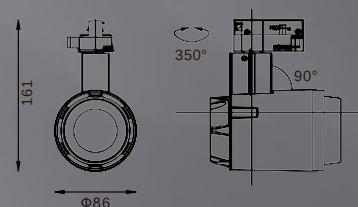

FS4011-15

Max.15W

Operating Temp. : -30°C + 40°C

13W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1170lm Ra90
- 4000K/1320lm Ra80
- 5000K/1470lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





		H
FS4005-30	Max.30W	152
FS4005-35	Max.35W	142
FS4005-42	Max.42W	167

Operating Temp. : -30°C + 40°C

38W COB chip (DC1000mA) / FS4005-42


- 2700K/2958lm Ra90
- 3000K/3360lm Ra90
- 4000K/3696lm Ra80
- 5000K/4116lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0-10v/Triac


Beam angle



Color selection




Simple and elegant designed led track light with aluminum die-cast housing, with multiple reflecting angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.
Application: fashion stores, chain store, shopping mall, showrooms, art galleries.





LED TRACK LIGHT SERIES




Model	P	H
FS4006-30	Max.30W	152
FS4006-35	Max.35W	142
FS4006-42	Max.42W	167

Operating Temp. : -30°C + 40°C
38W COB chip (DC1000mA) / FS4006-42



■ 2700K/2958lm	Ra90
■ 3000K/3360lm	Ra90
■ 4000K/3696lm	Ra80
■ 5000K/4116lm	Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection




Model	P	H	H1
FS4010-12	Max.12W	178	108
FS4010-18	Max.18W	205	128
FS4010-22	Max.22W	213	138

Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA) / FS4010-18


■ 2700K/1260lm	Ra90
■ 3000K/1418lm	Ra90
■ 4000K/1585lm	Ra80
■ 5000K/1764lm	Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection



LED TRACK LIGHT SERIES




FS4007-42
Max.42W

Operating Temp. : -30°C + 40°C
38W COB chip (DC1000mA)



■ 2700K/2958lm	Ra90
■ 3000K/3360lm	Ra90
■ 4000K/3696lm	Ra80
■ 5000K/4116lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection




FS4008-42
Max.42W

Operating Temp. : -30°C + 40°C
38W COB chip (DC1000mA)


■ 2700K/2958lm	Ra90
■ 3000K/3360lm	Ra90
■ 4000K/3696lm	Ra80
■ 5000K/4116lm	Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





FS4001-26

Max.26W

Operating Temp. : -30°C + 40°C

23W COB chip (DC600mA)

2700K/1820lm Ra90

3000K/2028lm Ra90

4000K/2288lm Ra80

5000K/2550lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection







Model	P	H
FS4014-18	Max.18W	262
FS4014-25	Max.25W	262

Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA) / FS4014-18
■ 2700K/1260lm Ra90
■ 3000K/1418lm Ra90
■ 4000K/1585lm Ra80
■ 5000K/1764lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10v/Triac



Beam angle




Color selection




Model	P	H	H1
FS4010E-12	Max.12W	278	108
FS4010E-18	Max.18W	298	128
FS4010E-22	Max.22W	308	138

Operating Temp. : -30°C + 40°C
10W COB chip (DC300mA) / FS4010E-12
■ 2700K/828lm Ra90
■ 3000K/850lm Ra90
■ 4000K/1020lm Ra80
■ 5000K/1056lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10v/Triac

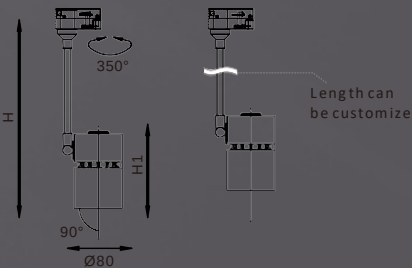

Beam angle




Color selection








*Small volume, small exquisite LED spotlights
with different kinds of
installation way to meet the different
of decoration requirement
*Perfect lighting shape
output, upgrading your place

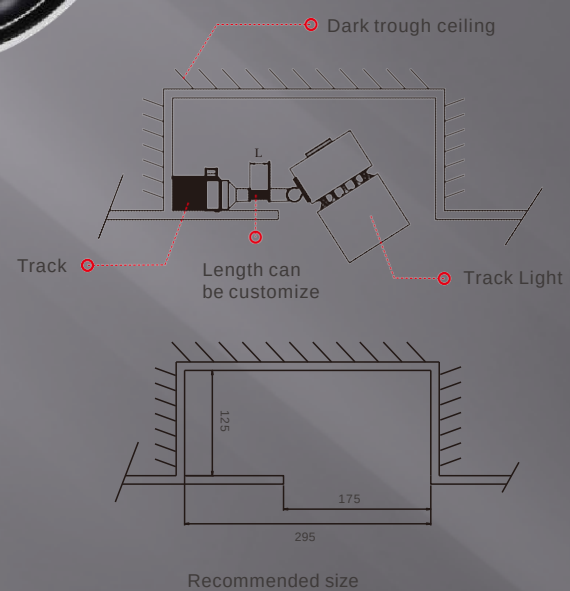

The dark trough ceiling is arranged
as the following steps







FS1069A-06

Max.6W

Operating Temp. : -30°C + 40°C

5W COB chip (DC500mA)

- 2700K/350lm Ra90
- 3000K/430lm Ra90
- 4000K/500lm Ra80
- 5000K/510lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac

Beam angle



Color selection






LED TRACK LIGHT



► Selected color



FS4015-18 / FS4015-25

Max.18W/25W

Operating Temp. : -30°C + 40°C

16W COB chip (DC450mA) / FS4015-18

■ 2700K/1242lm Ra90

■ 3000K/1296lm Ra90

■ 4000K/1500lm Ra80


■ 5000K/1550lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0-10V/Traic

Beam angle




Color selection



LED TRACK LIGHT



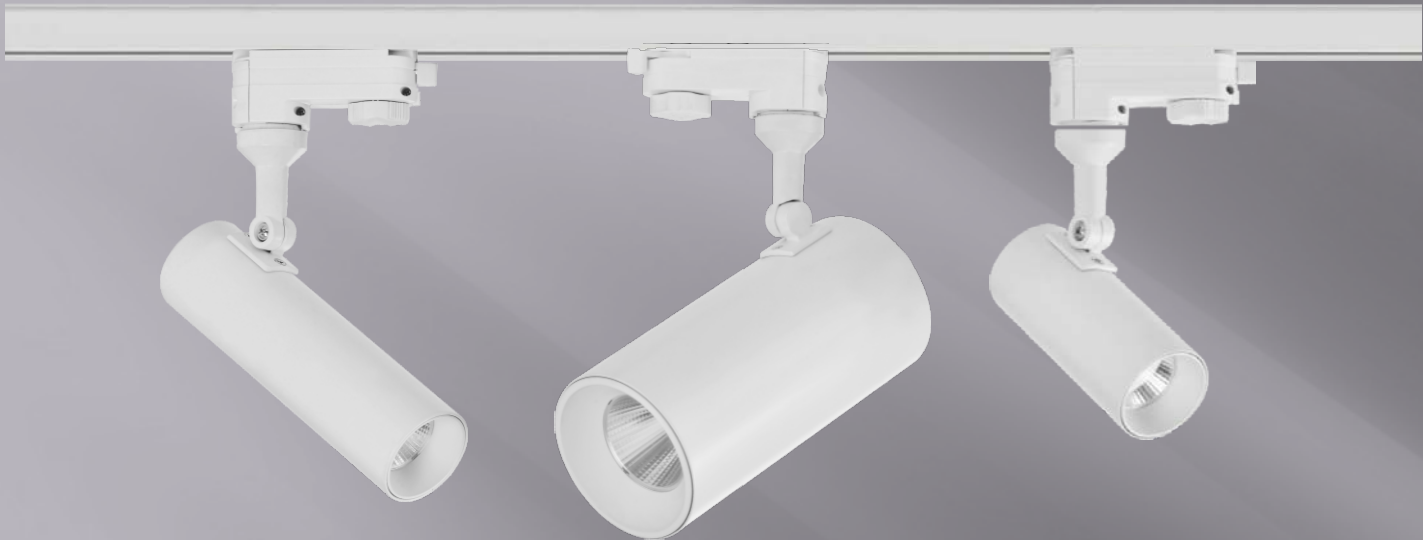


FS4019-30

Max.30W


Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)

- 2700K/2107lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic



Beam angle



Color selection




FS4019-20

Max.20W


Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)

- 2700K/1405lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic



Beam angle



Color selection





LED TRACK LIGHT




FS4019-15

Max.15W


Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)

- 2700K/1050lm Ra90
- 3000K/1200lm Ra90
- 4000K/1370lm Ra80
- 5000K/1550lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic



Beam angle



Color selection




FS4019-10

Max.10W


Operating Temp. : -30°C + 40°C
8.5W COB chip (DC250mA)

- 2700K/700lm Ra90
- 3000K/800lm Ra90
- 4000K/930lm Ra80
- 5000K/1020lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic



Beam angle



Color selection



LED TRACK LIGHT




FS4019-06

Max.6W


Operating Temp. : -30°C + 40°C
5W COB chip (DC500mA)

- 2700K/420lm Ra90
- 3000K/470lm Ra90
- 4000K/540lm Ra80
- 5000K/605lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic





Beam angle




Color selection







LED TRACK LIGHT



FS4024-25

Max.25W

Operating Temp. : -30°C + 40°C
23W COB chip (DC600mA)


- 2700K/1750lm Ra90
- 3000K/2000lm Ra90
- 4000K/2300lm Ra80
- 5000K/2600lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic

Beam angle



Color selection



LED TRACK LIGHT




FS4025-25

Max.25W


Operating Temp. : -30°C + 40°C
23W COB chip (DC600mA)

- 2700K/1750lm Ra90
- 3000K/2000lm Ra90
- 4000K/2300lm Ra80
- 5000K/2600lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Dali/0-10V/Traic



Beam angle



Color selection




FS4023-30

Max.30W


Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)

- 2700K/2107lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic



Beam angle



Color selection





LED TRACK LIGHT




FS4023-20

Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)

- 2700K/1405lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic



Beam angle



Color selection




FS4023-10

Max.10W

Operating Temp. : -30°C + 40°C
8.5W COB chip (DC250mA)

- 2700K/700lm Ra90
- 3000K/800lm Ra90
- 4000K/930lm Ra80
- 5000K/1020lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic




Beam angle



Color selection



LED TRACK LIGHT

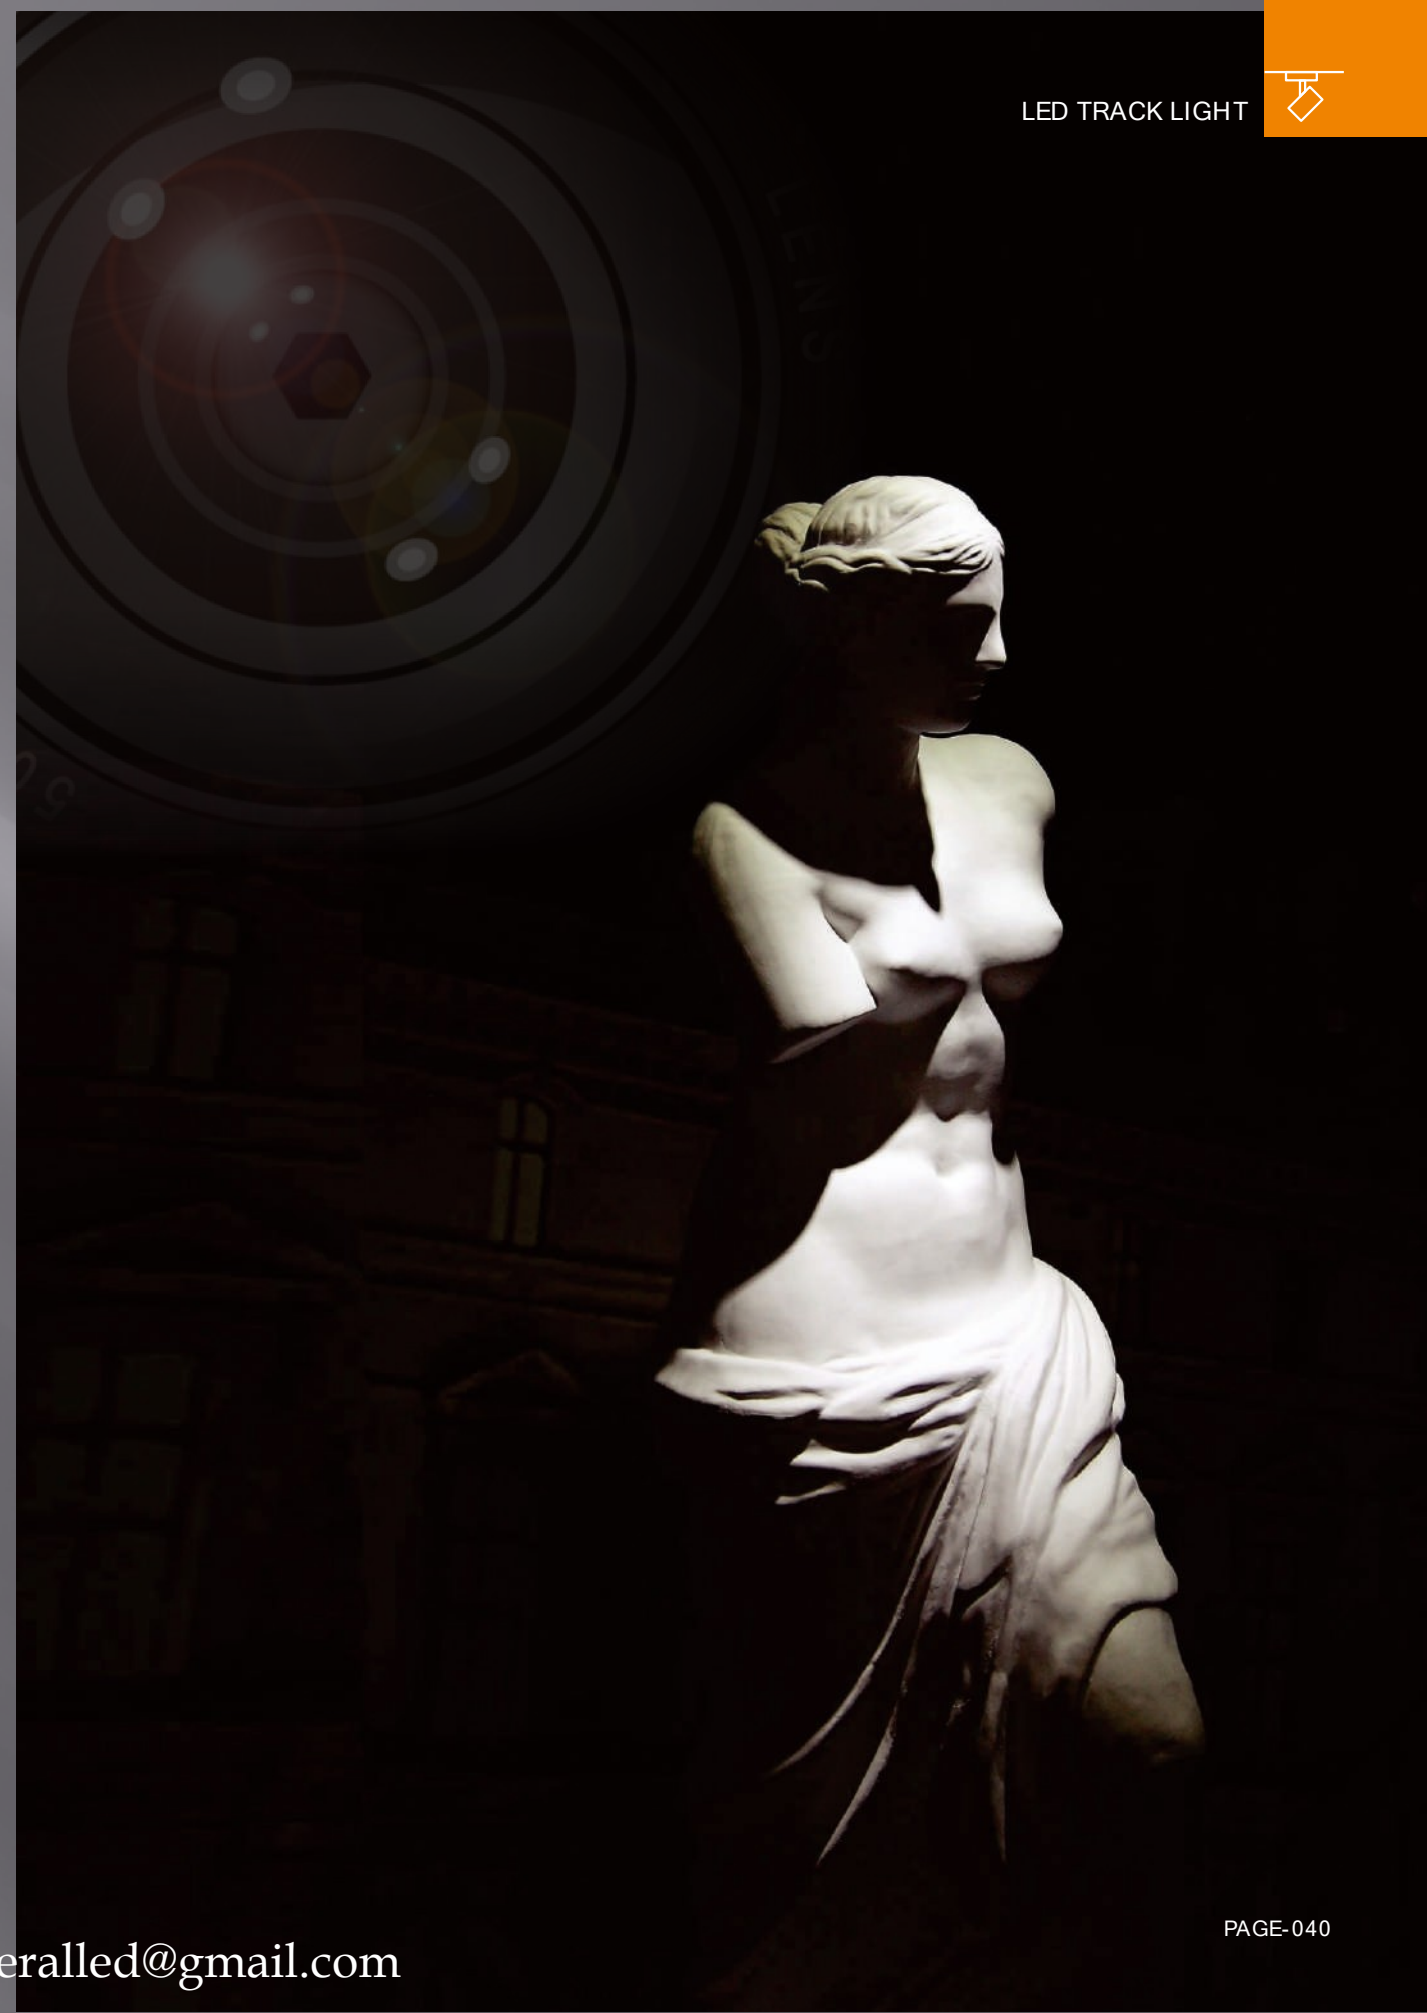

**FS4020-15**

Max.15W

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA)

■ 2700K/800lm Ra90

■ 3000K/900lm Ra90

■ 4000K/1050lm Ra90

Inbuilt Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer:Dali/ 0-10V/Traic

Beam angle




Color selection

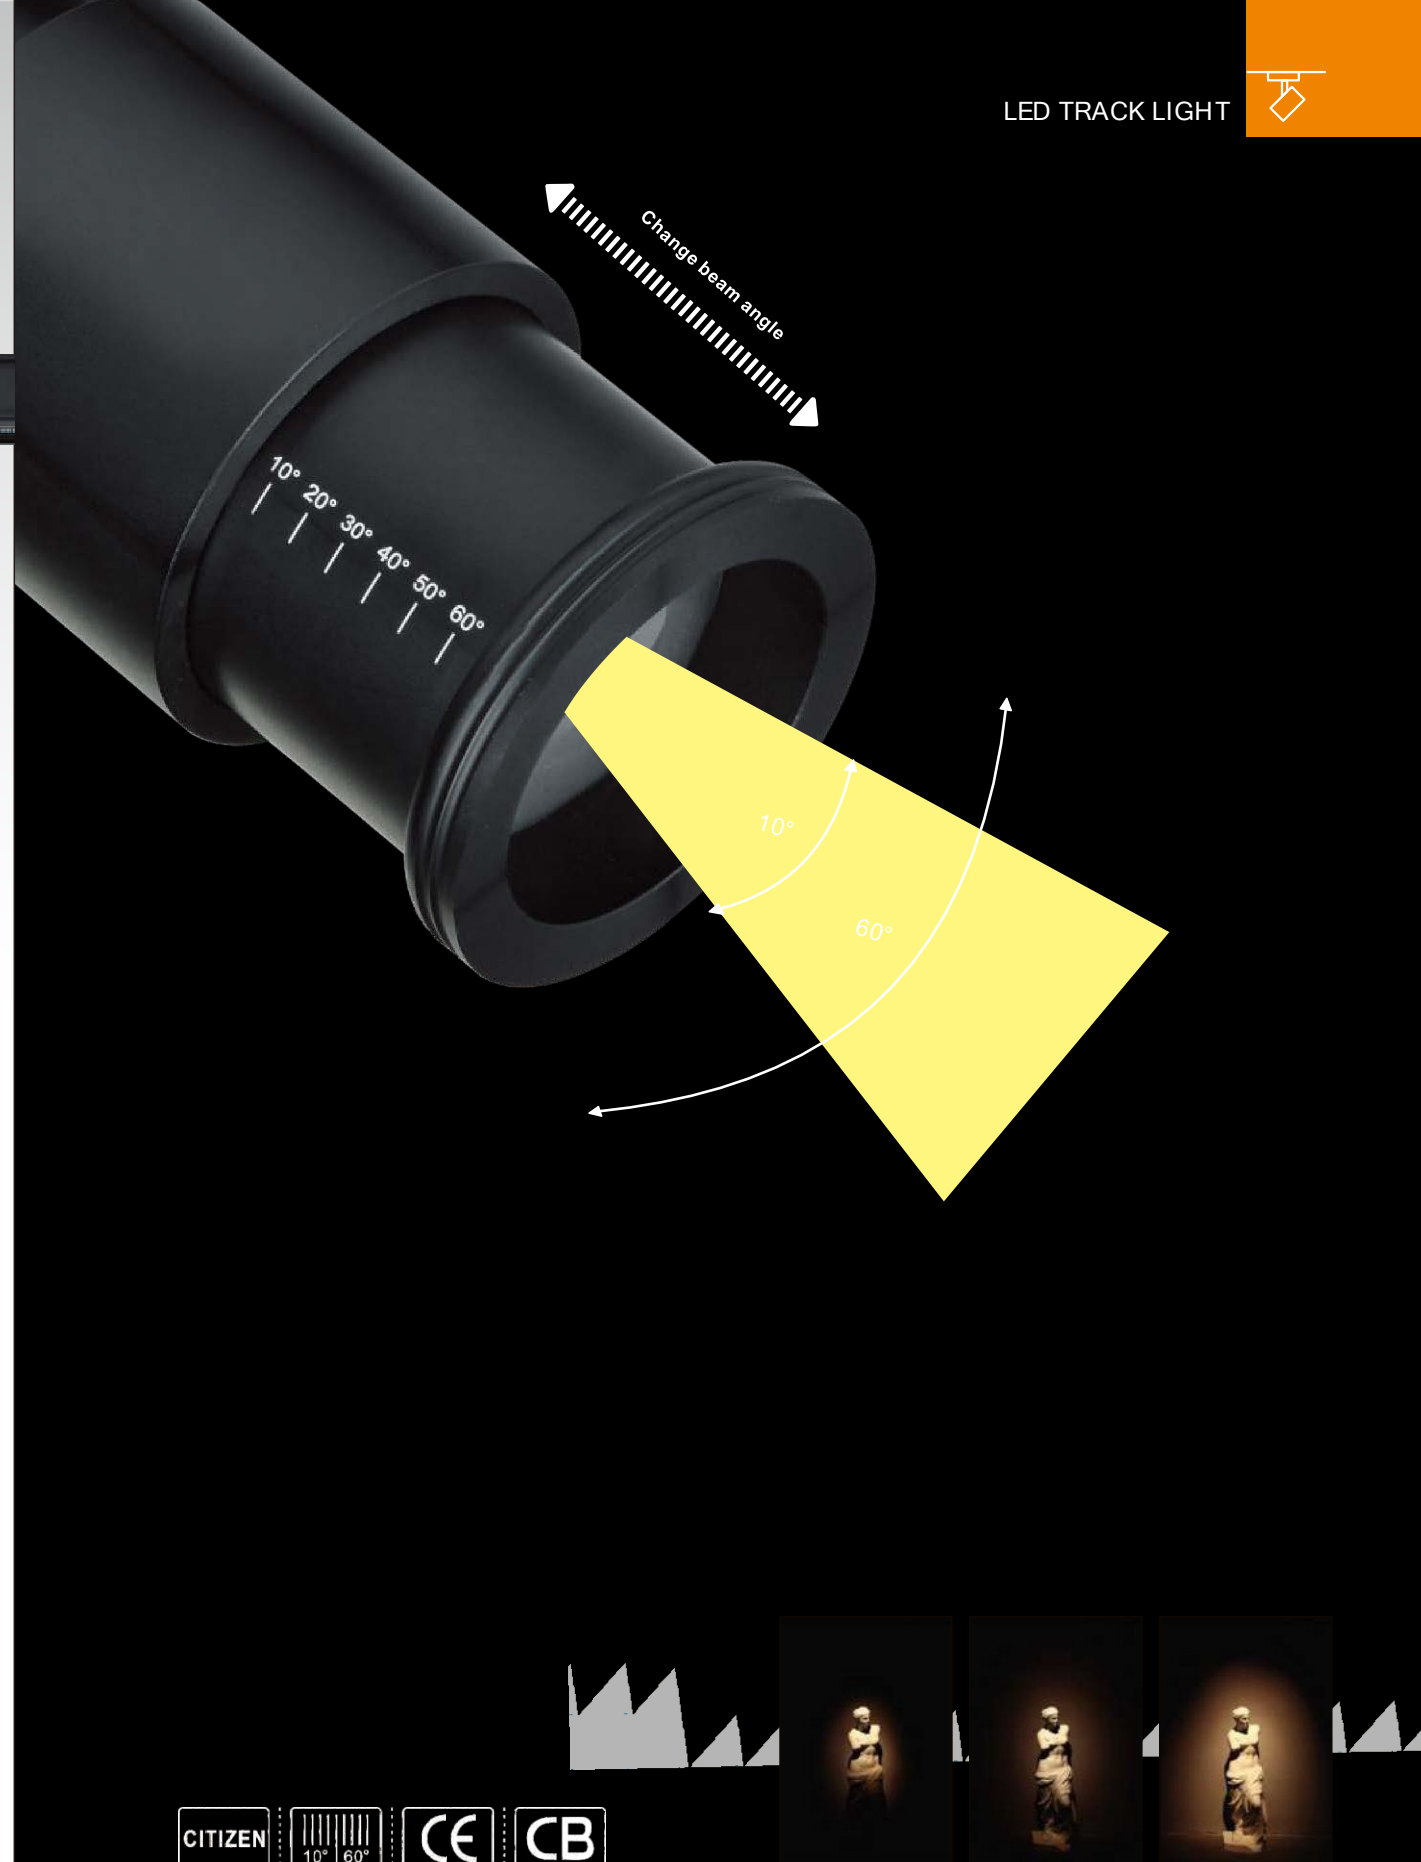





LED TRACK LIGHT

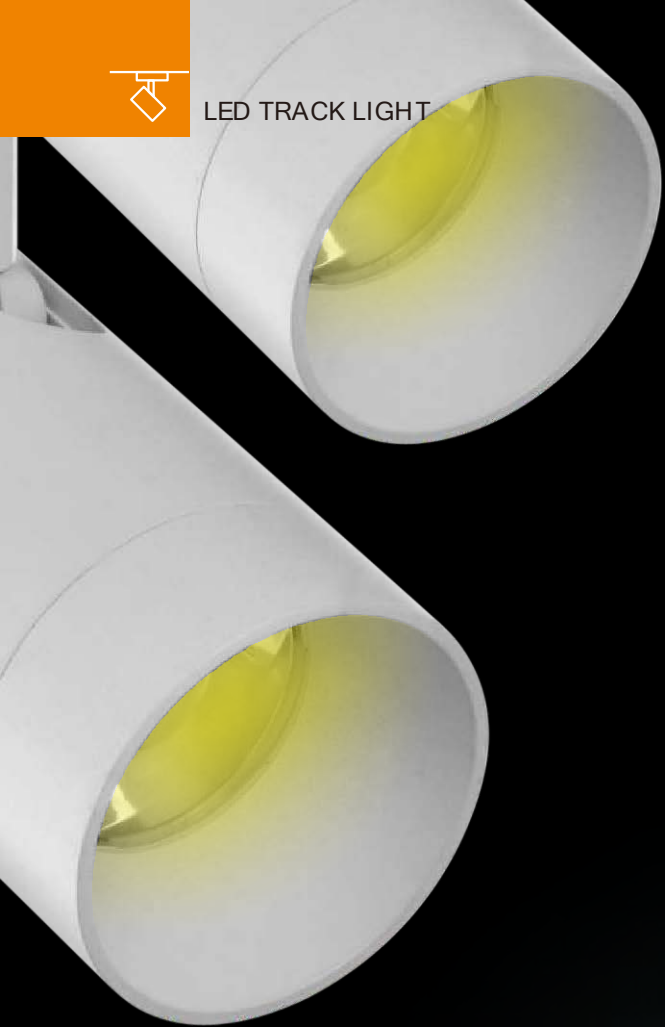

4°
Beam angle
11116Lux



LED TRACK LIGHT



FS4021-08

Max .8W

Operating Temp. : -30°C + 40°C
CREE XPL LED chip (DC2500mA)

- 2700K/450lm Ra80
- 3000K/520lm Ra80
- 4000K/560lm Ra80



CCT	one meter of illuminance value
2700K	9448 LUX
3000K	11116 LUX
4000K	12783 LUX

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic


Beam angle



Color selection




4°



15°



Front Ring optional colors

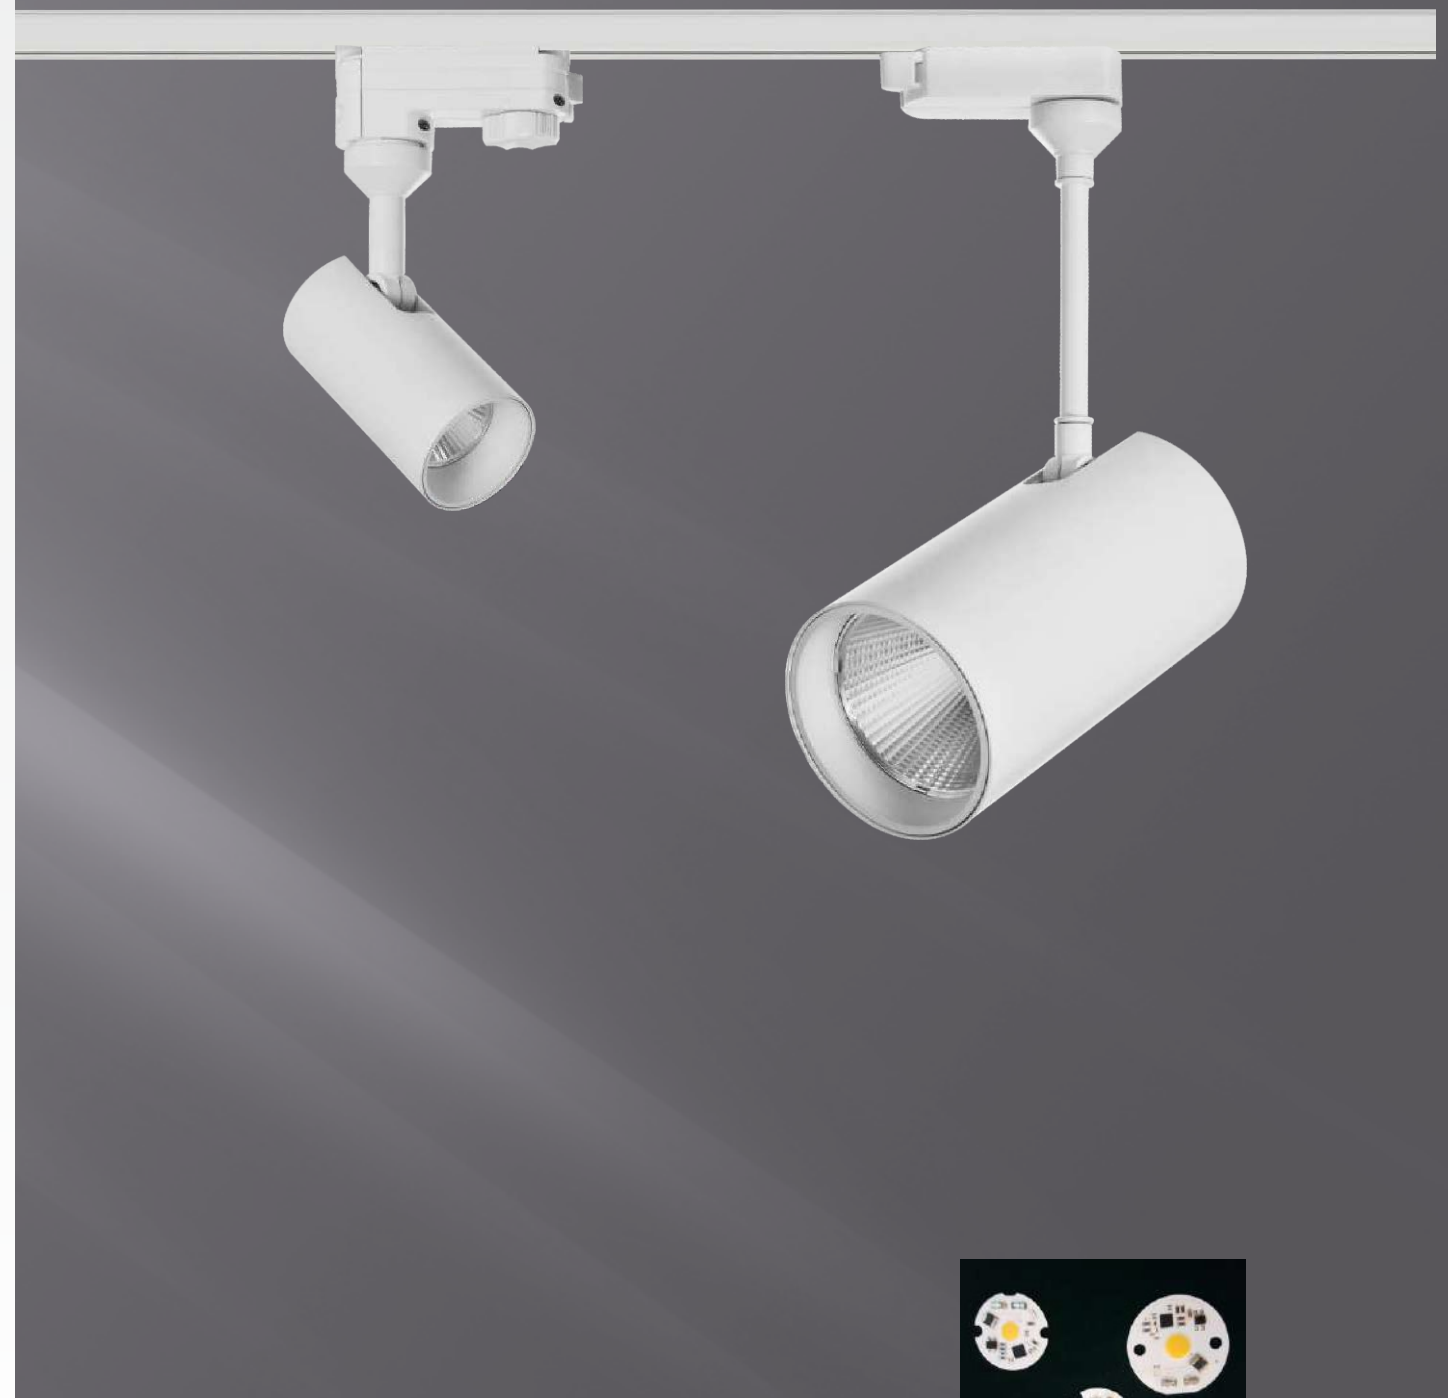

*Light source using AC-COB, free of drive power
*High quality aluminum alloy die-casting , beautiful shape, simple and fashion design.
*Track installation, can move around the left and right direction, flexible and convenient
*Lamp body can rotate 360 degrees freely, and widely application of all kinds of stores, shopping malls, hotels and so on.

**FS4016-08**

Max.8W

Operating Temp. : -30°C + 40°C


8W COB chip (120/230V)

- 2700K/596lm Ra90
- 3000K/620lm Ra90
- 4000K/695lm Ra80
- 5000K/735lm Ra70

COB : AC120/230V (without Driver)

Performance: Non-dimmable/dimmable



Dimmer: Triac



Beam angle



Color selection

**FS4016-30**

Max.30W

Operating Temp. : -30°C + 40°C

30W COB chip (120/230V)


- 2700K/2268lm Ra90
- 3000K/2365lm Ra90
- 4000K/2538lm Ra80
- 5000K/2646lm Ra70

COB : AC120/230V (without Driver)


Performance: Non-dimmable/dimmable

Dimmer: Triac


Beam angle




Color selection



Beam angle



Color selection



Model	P	H
FS4016-15	Max.15W	100
FS4016-20	Max.20W	130

Operating Temp. : -30°C + 40°C

15W COB chip (120/230V) / FS4016-15

- 2700K/1118lm Ra90
- 3000K/1150lm Ra90
- 4000K/1260lm Ra80
- 5000K/1425lm Ra70

COB : AC120/230V (without Driver)


Performance: Non-dimmable/dimmable

Dimmer: Triac



LED MINI GRILLE LIGHT SERIES

MODULIS

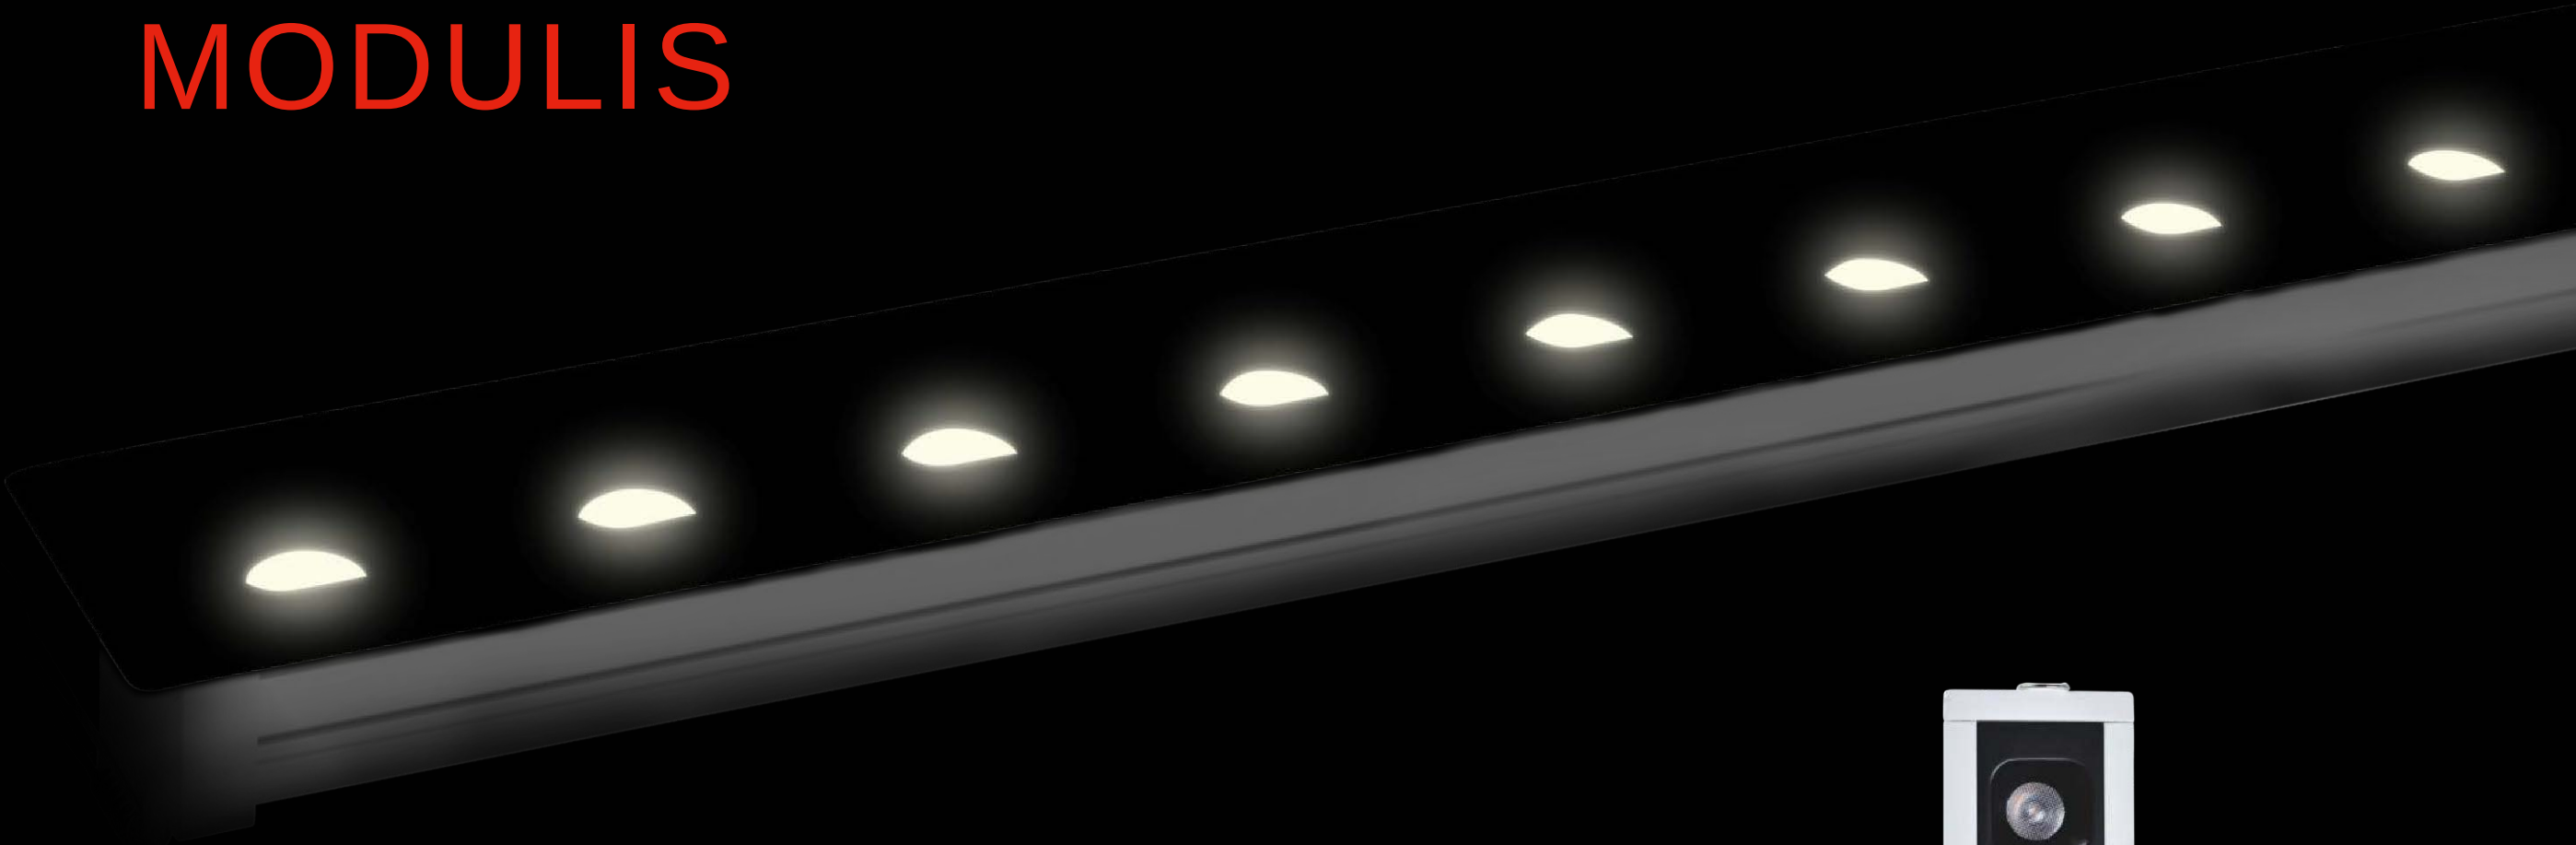

LED Wallwasher linear light with Finland **Ledil** top quality lens,
High thermal conductive aluminum body Metal black surface coating, free adjusted Perfect wash wall effect, is
the first choice of lighting designers





LED MINI GRILLE LIGHT SERIES





FS8005-16 / 6*2.1W LED / 960lm / 2700K / Ra80



FS8006-30 / 12*2.1W LED / 1800lm / 2700K / Ra80



FS8007-45 / 18*2.1W LED / 3000lm / 2700K / Ra80

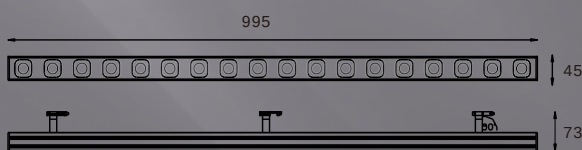

LED MINI GRILLE LIGHT SERIES




Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali

Beam angle:




Color selection



Surface mounted, can easily adjust any angel , Meet the lighting requirements of all directions



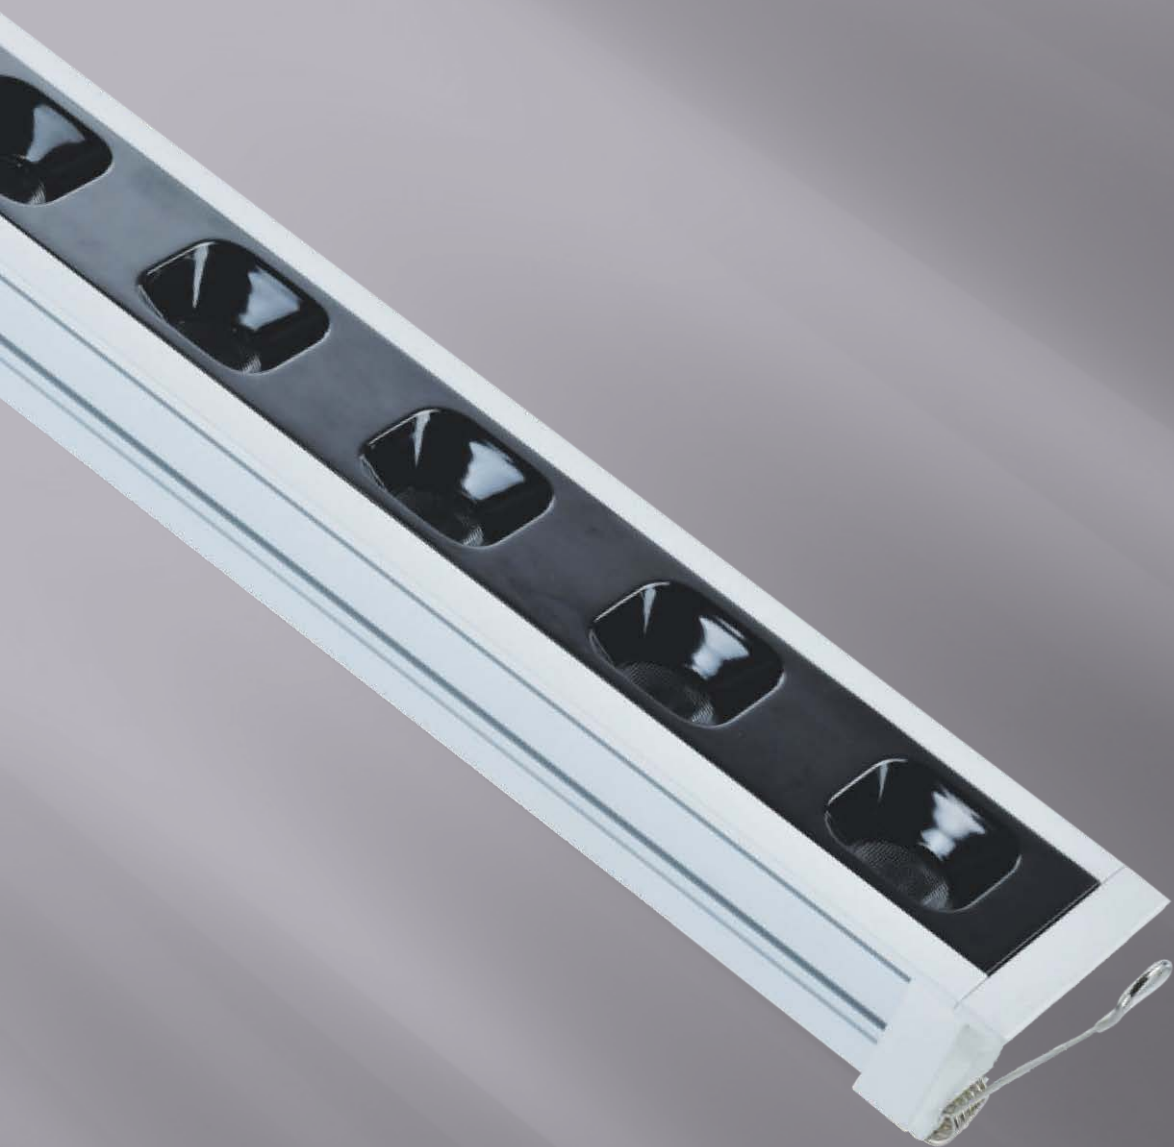

*Base on the Surface mounted version, we increase trimless, recessed and Grille version to meet differcnt place installation requirement
*Excep wallwasher funtion it can also instead of the downlight lighting
*Apply in Museum, Hotel clubs, shopping malls, coffee shop, ect.





LED MINI GRILLE LIGHT SERIES



FS8013-03 / 1*2.1W LED / 207lm / 2700K / Ra80



FS8013-05 / 2*2.1W LED / 414lm / 2700K / Ra80




FS8013-08 / 3*2.1W LED / 552lm / 2700K / Ra80



FS8008-16 / 6*2.1W LED / 1104lm / 2700K / Ra80



FS8009-30 / 12*2.1W LED / 2070lm / 2700K / Ra80

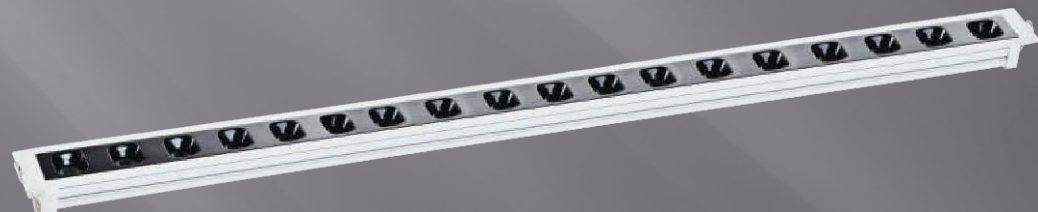

FS8010-45 / 18*2.1W LED / 3400lm / 2700K / Ra80



LED MINI GRILLE LIGHT SERIES




Remote Driver: AC100-240V 50/60Hz






Driver performance: Non-dimmable/dimmable


Dimmer: 0-10V/Triac/Dali

Beam angle:



Color selection







LED MINI GRILLE LIGHT SERIES



LEDIL LENS



TENSILE PMMA



L1000*W50mm

FS8030-18

Max.18W

Operating Temp. : -30°C + 40°C

8x1w (CREE XPE)+136pcs SMD 2835 /Input:300mA.53v

SMD part lumen

2700K/560lm Ra90

3000K/630lm Ra90

4000K/720lm Ra80

5000K/810lm Ra70




Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

CREE LED chip part:

Beam angle:



Color selection

B


S

W





LED MINI GRILLE LIGHT SERIES



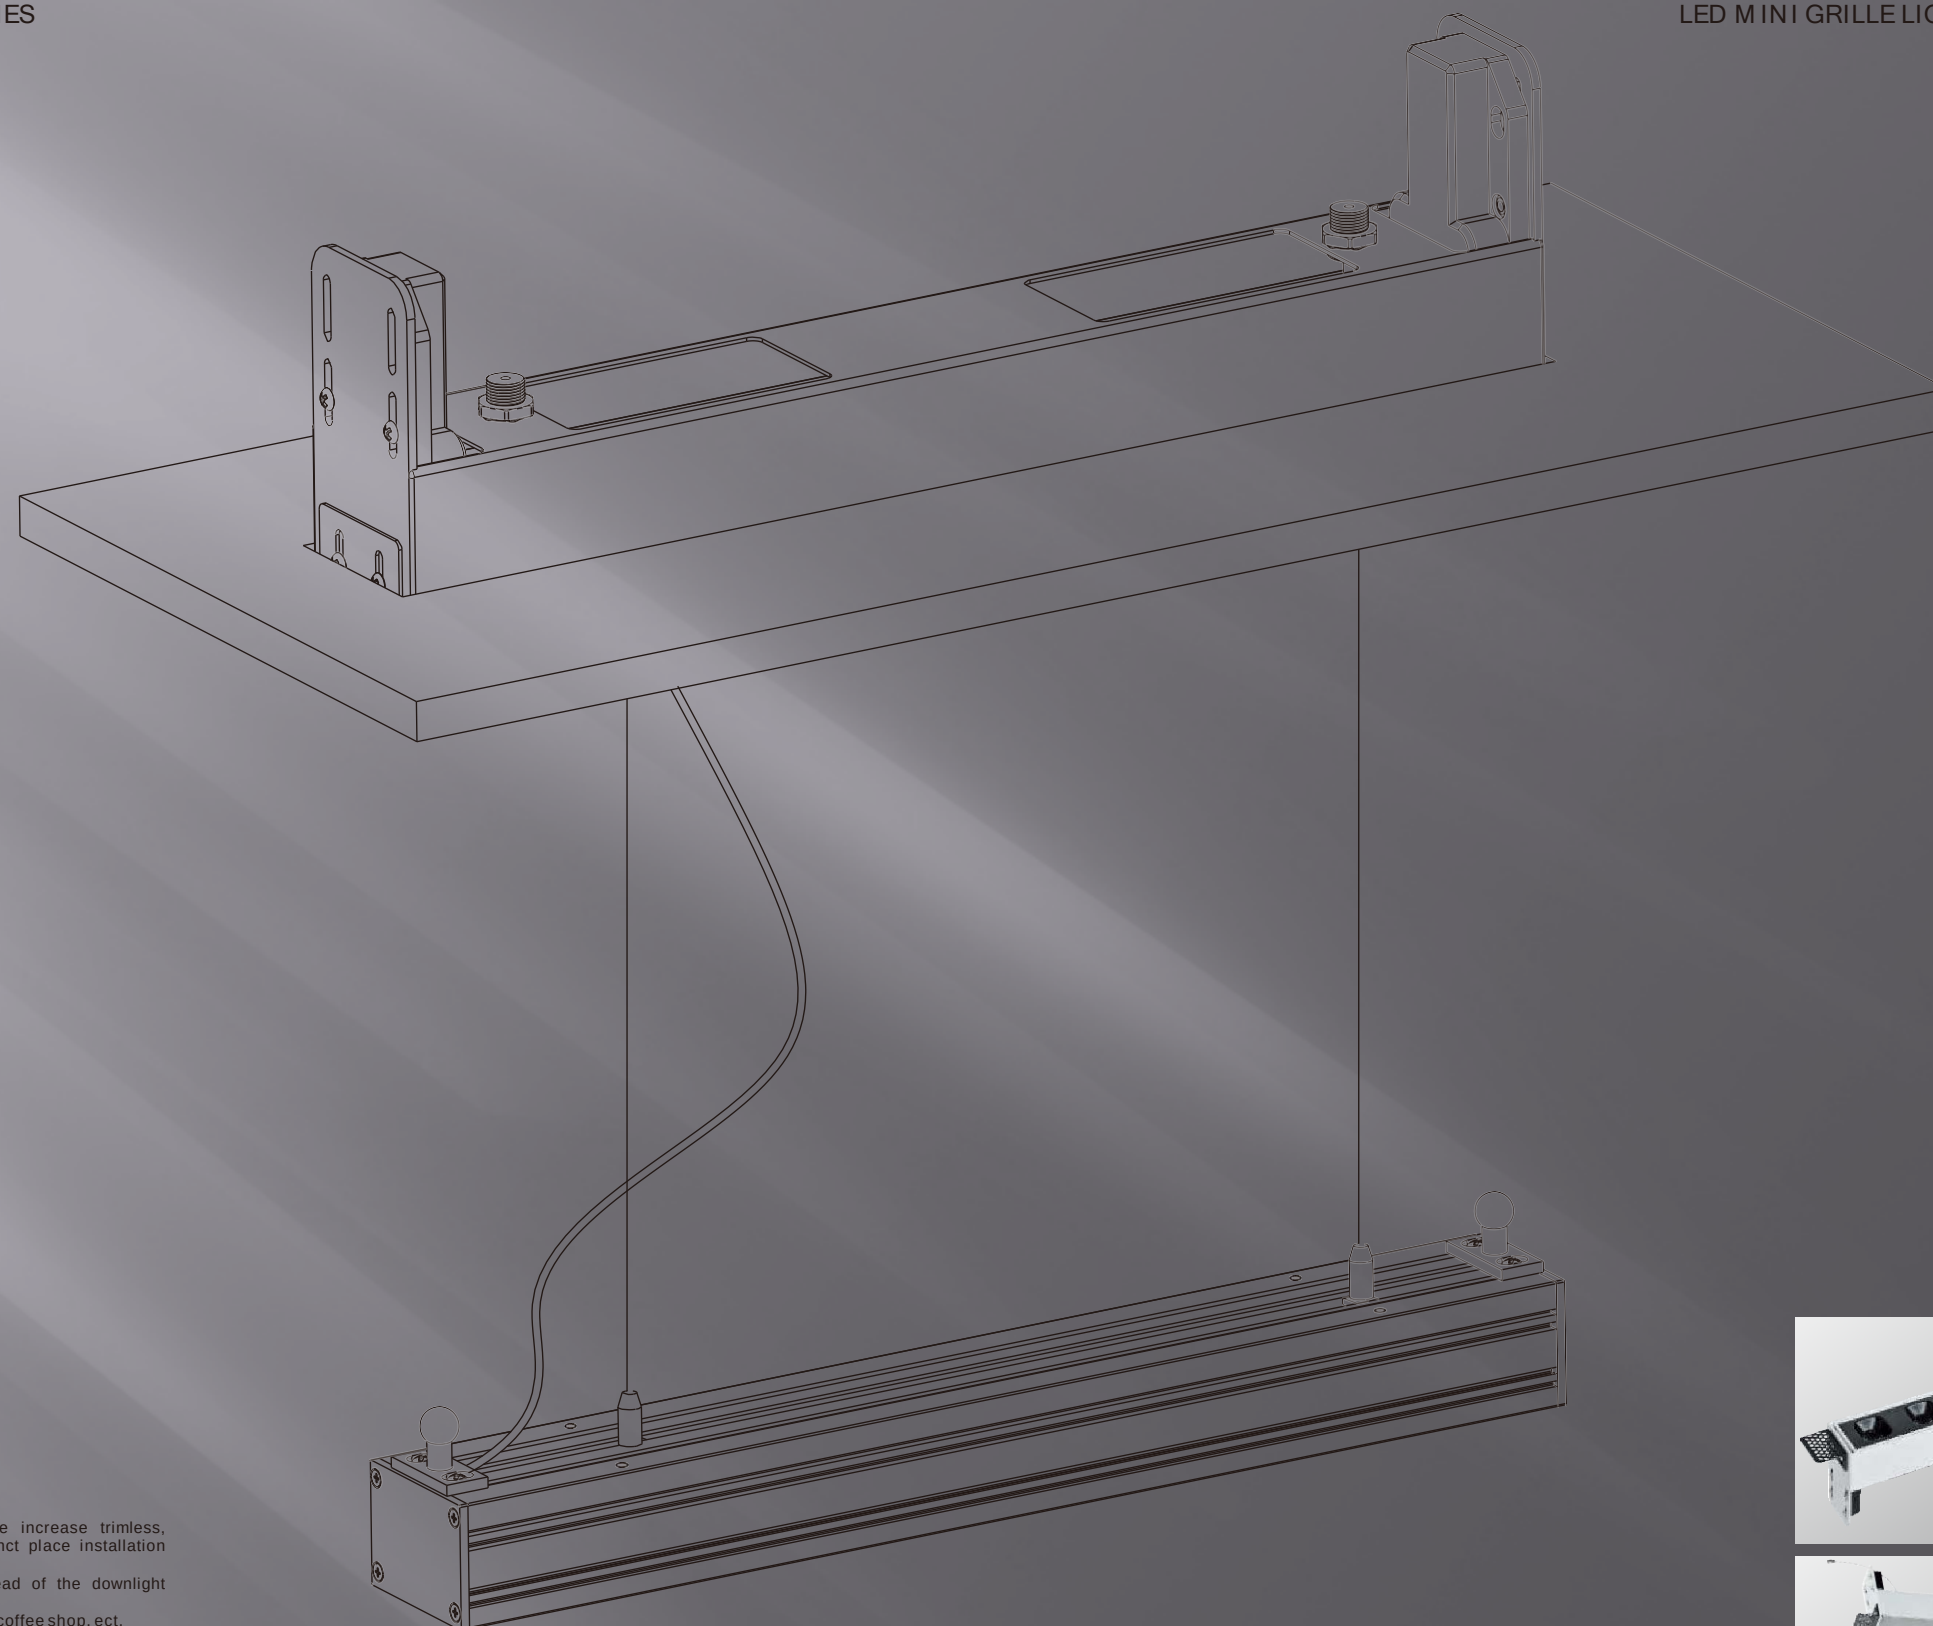

* Base on the Surface mounted version, we increase trimless, recessed and Grille version to meet different place installation requirement.
* Except wallwasher function it can also instead of the downlight lighting.
* Apply in Museum, Hotel clubs, shopping malls, coffee shop, etc.

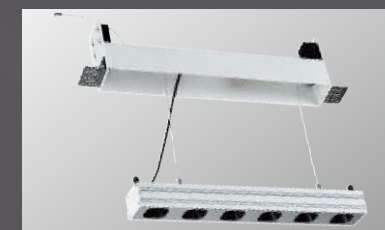

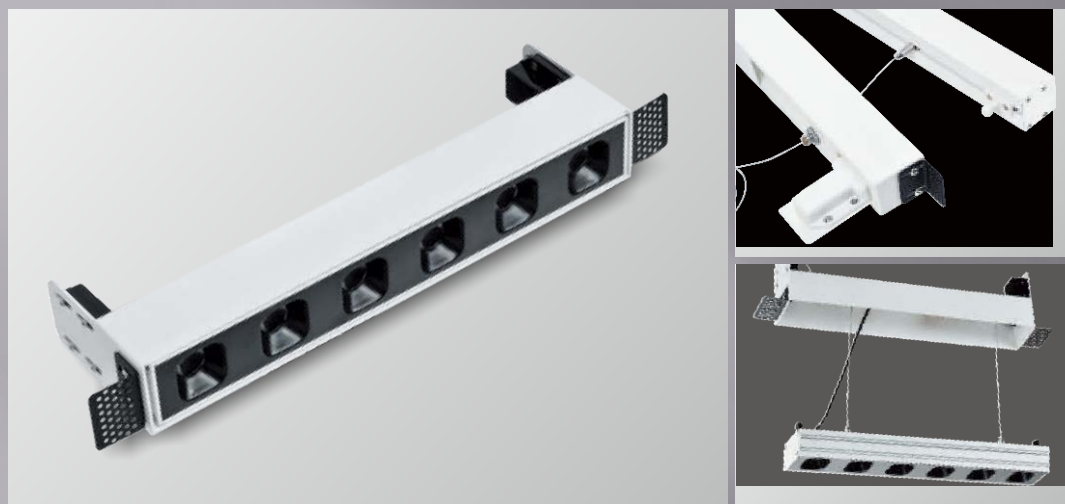

Installation steps



Standard length:344/674/1056mm(details refer to left drawing),
Length can be customize by jointing.
Cutout: Width 52mm, Length refer to what selected



FS8005D-16



FS8005D-30



FS8005D-45





LED LINEAR LIGHT SERIES

LIGNIS

LED Recessed Linear light with small linear design makes a simple and modern Decoration
Wallwasher and direct light output -two ways of light output for section
High thermal conductivity aluminum lamp body, seamless splicing and more flexible





LED LINEAR LIGHT SERIES



FS8026-30

Max.30W

Operating Temp. : -30°C + 40°C

27W SMD chip (2*72pcs 2835) DC700mA

2700K/2100lm Ra90

3000K/2300lm Ra90

4000K/2550lm Ra80


5000K/2800lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



FS8026
Symmetric optics



FS8027
Asymmetric optics 30°



Color selection

B S W

FS8026



FS8027

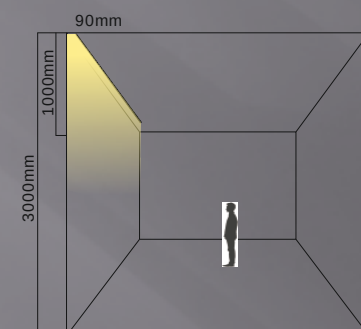

LED LINEAR LIGHT SERIES




FS8026-15




L500×W38mm

FS8026-30




L1000×W38mm

FS8027-15




L500×W38mm

FS8027-30



L1000×W38mm



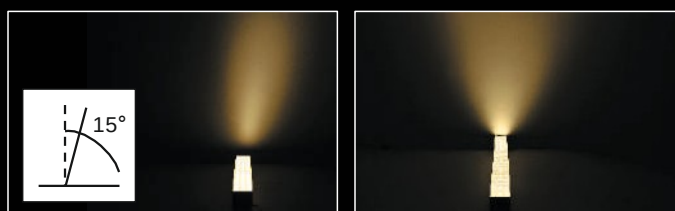

BEAM ANGLE 30°

*Housing made of high pressure extruded aluminum construction
*UV and Corrosion resistance, with durable, anti-fading finish in Architectural Silver Grey or Matt White (can customize according required)
*high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions
* Installation: Recessed, Mounting, Suspended





LED LINEAR LIGHT SERIES

LED Recessed Linear light with small linear design makes a simple and modern Decoration
Wallwasher and direct light output -two ways of light output for section
High thermal conductivity aluminum lamp body, seamless splicing and more flexible





LED LINEAR LIGHT SERIES



FS8026-30

Max.30W

Operating Temp. : -30°C + 40°C

27W SMD chip (2*72pcs 2835) DC700mA

2700K/2100lm Ra90

3000K/2300lm Ra90

4000K/2550lm Ra80


5000K/2800lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle




FS8026
Symmetric optics




FS8027
Asymmetric optics 30°


Color selection



FS8026



FS8027

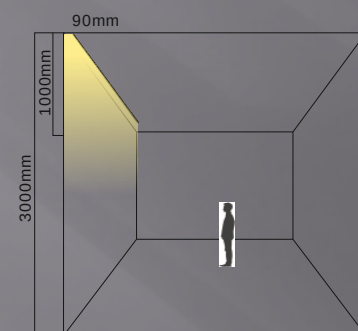

LED LINEAR LIGHT SERIES




FS8026-15



L500×W38mm

FS8026-30




L1000×W38mm

FS8027-15




L500×W38mm

FS8027-30



L1000×W38mm




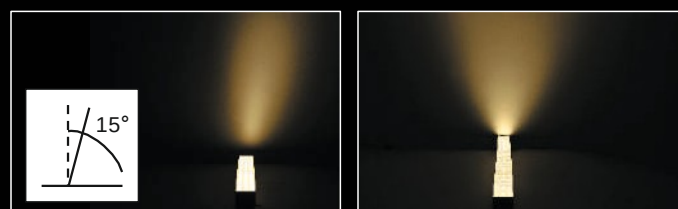

BEAM ANGLE 30°

*Housing made of high pressure extruded aluminum construction
*UV and Corrosion resistance, with durable, anti-fading finish in Architectural Silver Grey or Matt White (can customize according required)
*high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions
* Installation: Recessed, Mounting, Suspended



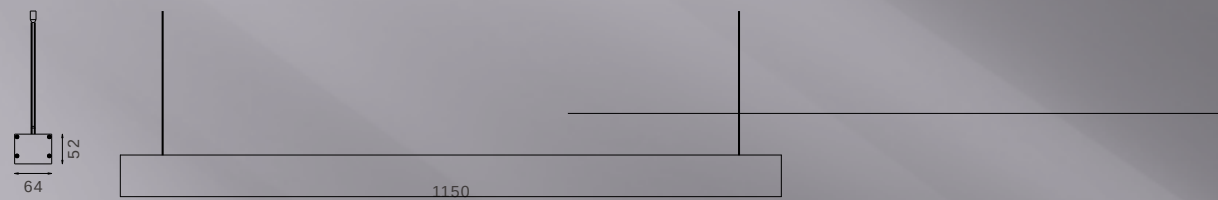


FS8028-26

Max.26W



Operating Temp. : -30°C + 40°C
 23W SMD chip (4×33pcs) DC 600mA
 2700K/1950lm Ra90
 3000K/2210lm Ra90
 4000K/2470lm Ra80
 5000K/2700lm Ra70

Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

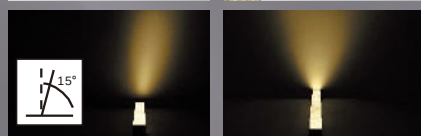

Asymmetric optics 15°

Symmetric optics




FS8001-18


L1220*W62*H80mm
 18W
 3000K/1450lm
 4000K/1530lm

FS8001-25

L1220*W62*H80mm
 25W
 3000K/2025lm
 4000K/2125lm

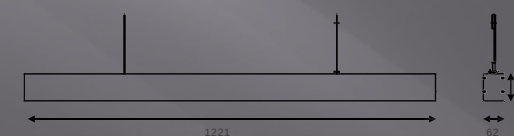

Installation steps

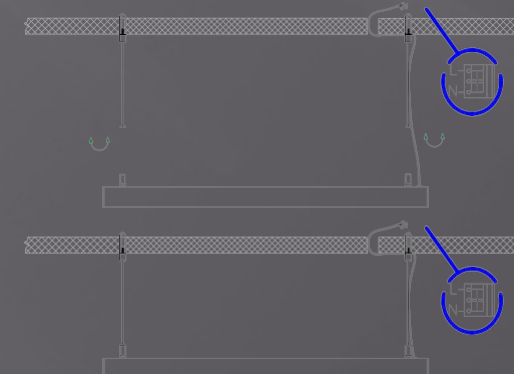




FS8015-15

L612*W80*H42mm
15W
3000K/1200lm
4000K/1275lm

FS8014-18

L1224*W80*H42mm
18W
3000K/1450lm
4000K/1530lm

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



FS8016-15

L626*W56*H45mm
15W
3000K/1200lm
4000K/1275lm




Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




FS8011-10

L549*W35*H35mm
10W
3000K/700lm
4000K/800lm


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

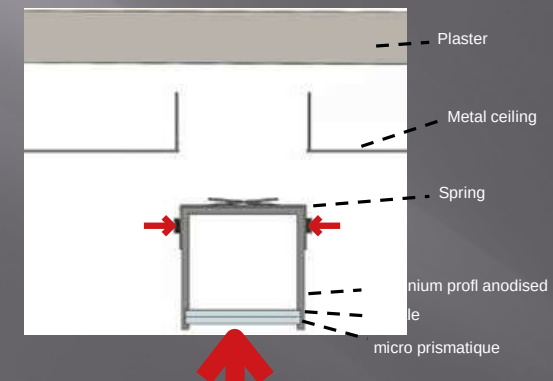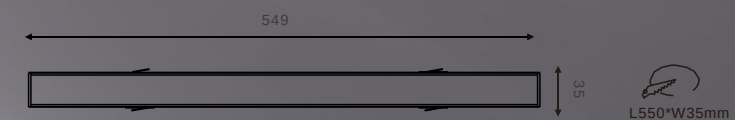

Cutout of the Metal Ceiling

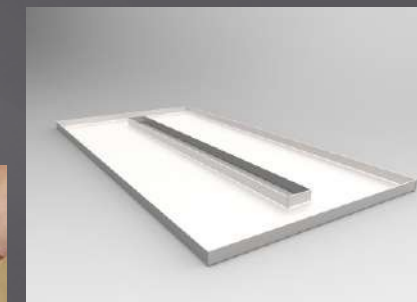

Lamp Details

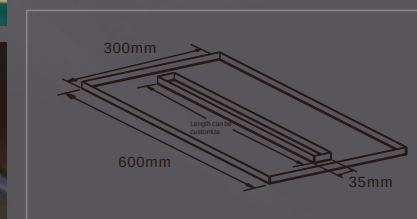




PANNELUM



FS8018B-19

L1199*W149*H29mm
19W
3000K/1500lm
4000K/1600lm


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

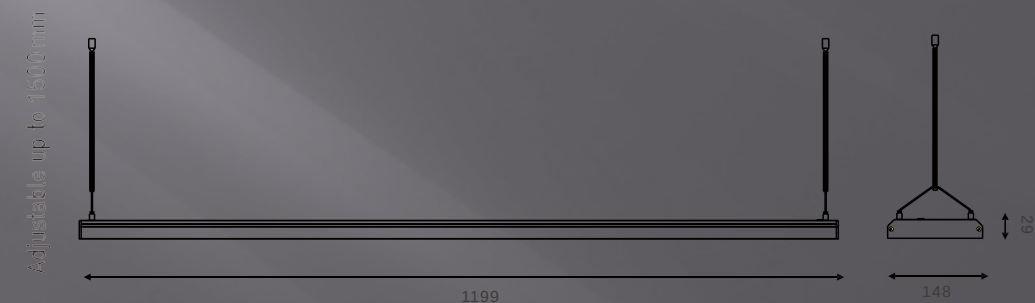

Gamme de luminaire de bureaux UGR 19 sur mesure à suspendre ou à intégrer dans un faux plafond type Zehnder ou Barcolair.


Cette gamme est disponible avec ou sans cadre aluminium et équipé d'optique opale ou micro prismatique.

MULTIPLE INSTALLATION SERIES

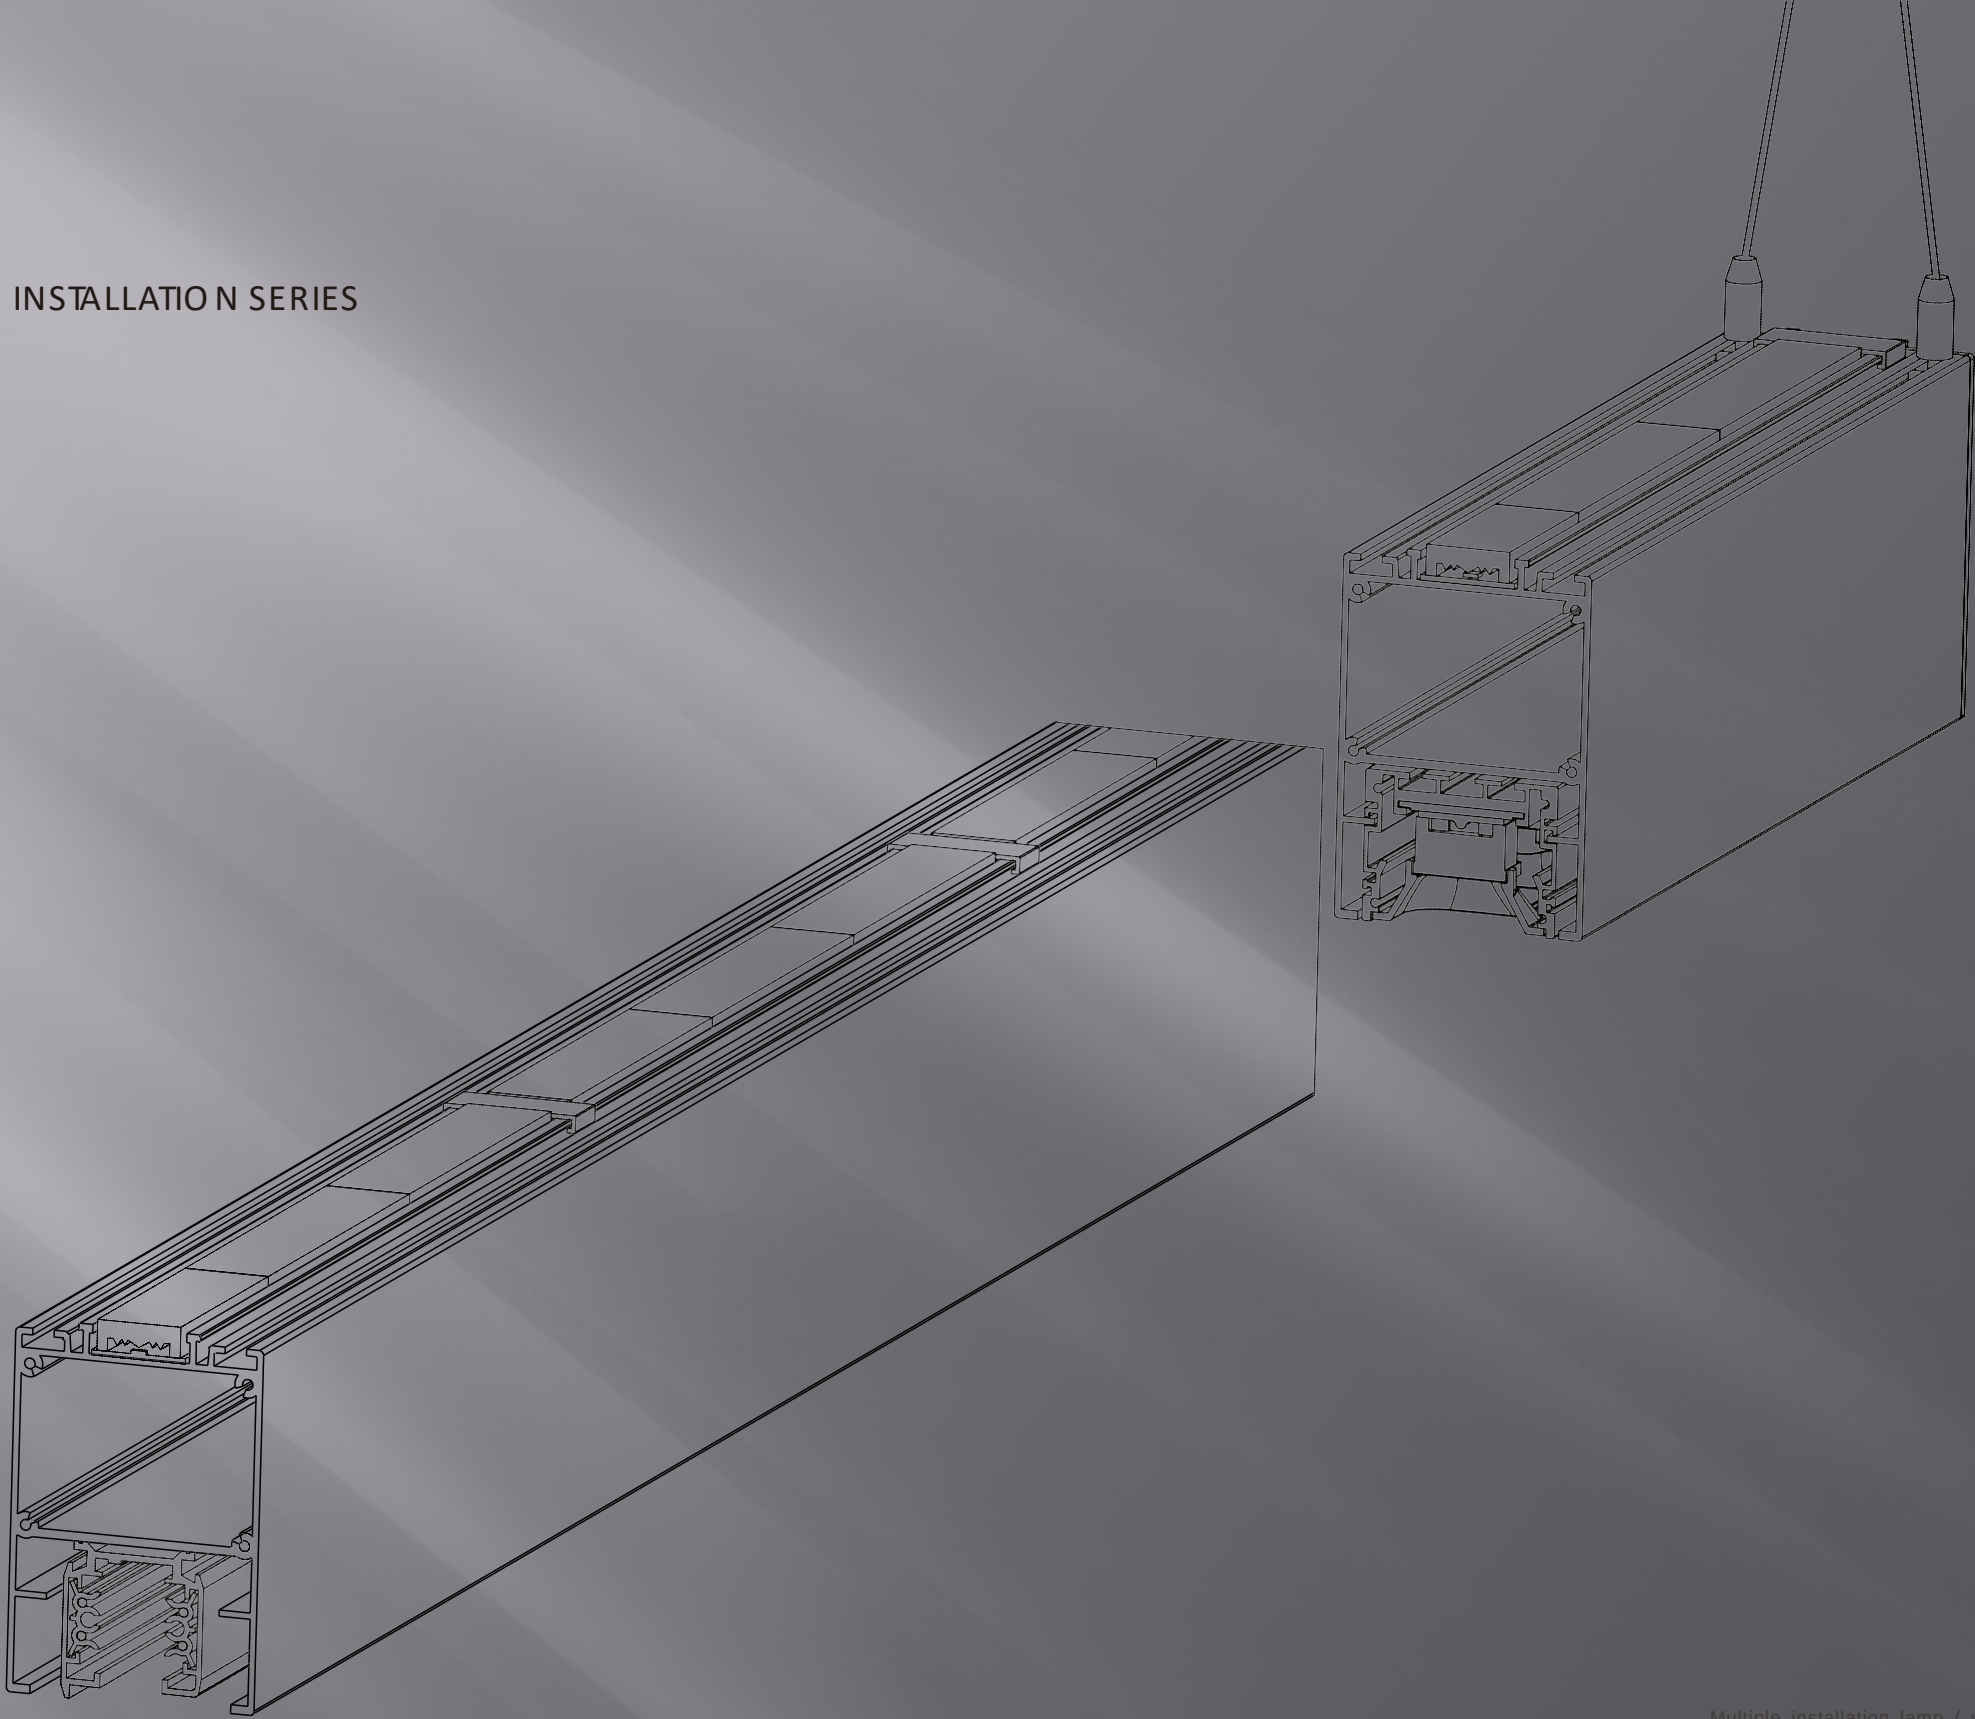

Multiple installation lamp (with different constructions) bring us diversified luminous effect; Including spot, linear, and accent lighting etc. different group of mould, free change of the lighting effect according to the application required, and easy operation; It is the development direction of the lighting industry.

Installation

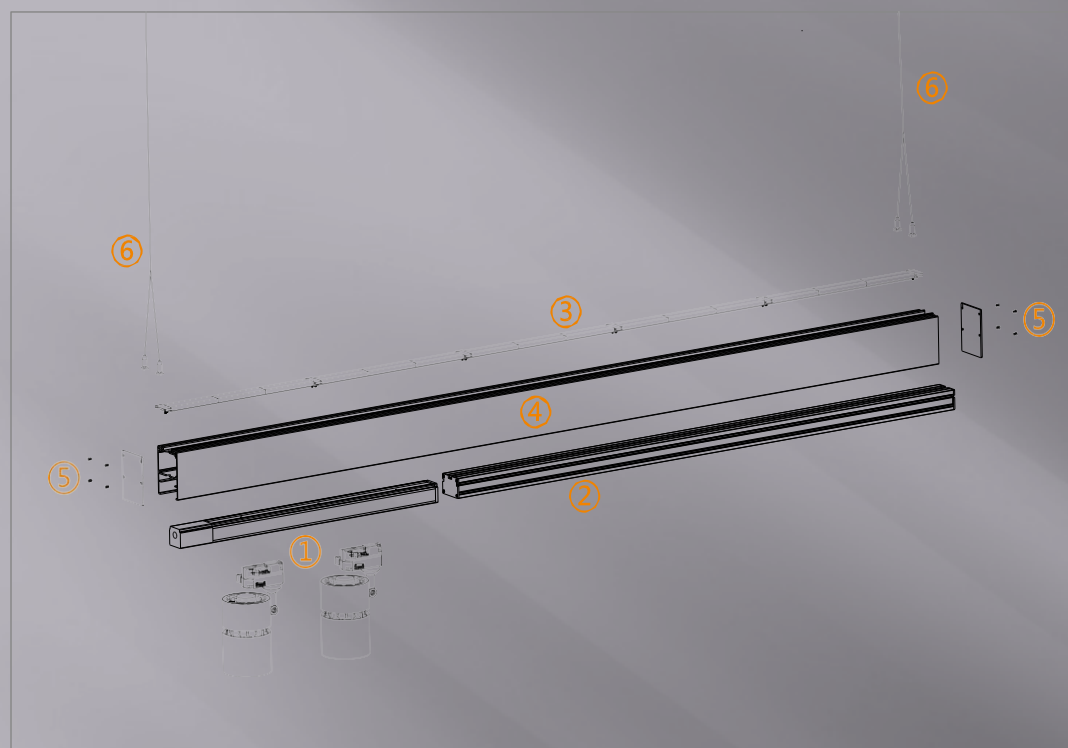

- 1,Track and Tracklight, compatible with all kinds Tracklights
- 2,lighting surface parts (CREE XPE-E2 +Customize Lens)
- 3,Ceiling lighting components
- 4,Multifunctional lamp body
- 5,End Caps
- 6,Suspension wire




FS8021 Multiple Installation Lamp






*Single or multiple installation were accepted, can also be customize
*Aircraft grade aluminum shell, better heat dissipation, less attenuation.
*Linear design, beautiful appearance, easy installation
*Tracklight can be adjusted in multiple angles, to meet the lighting needs,
light control more precision




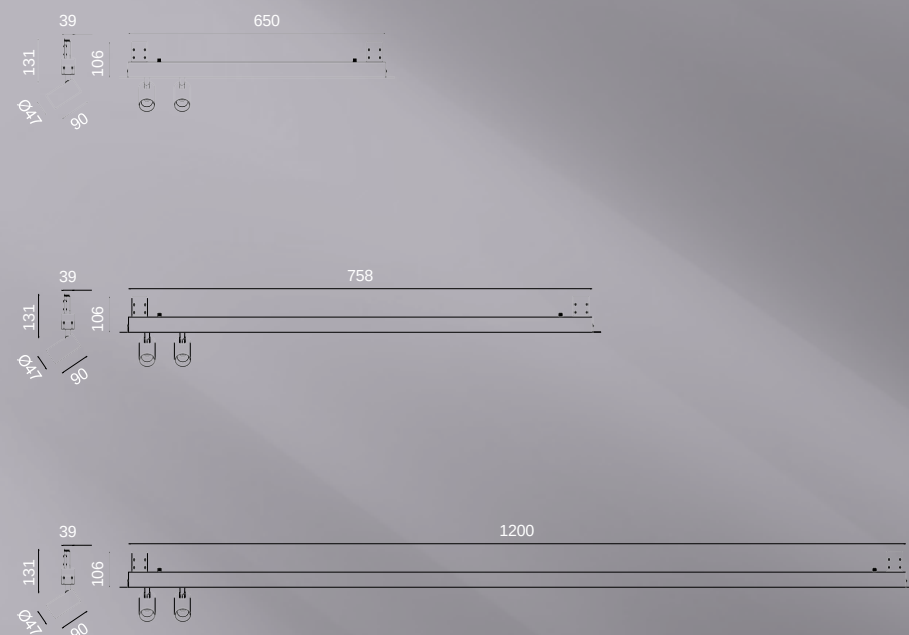


Installation steps

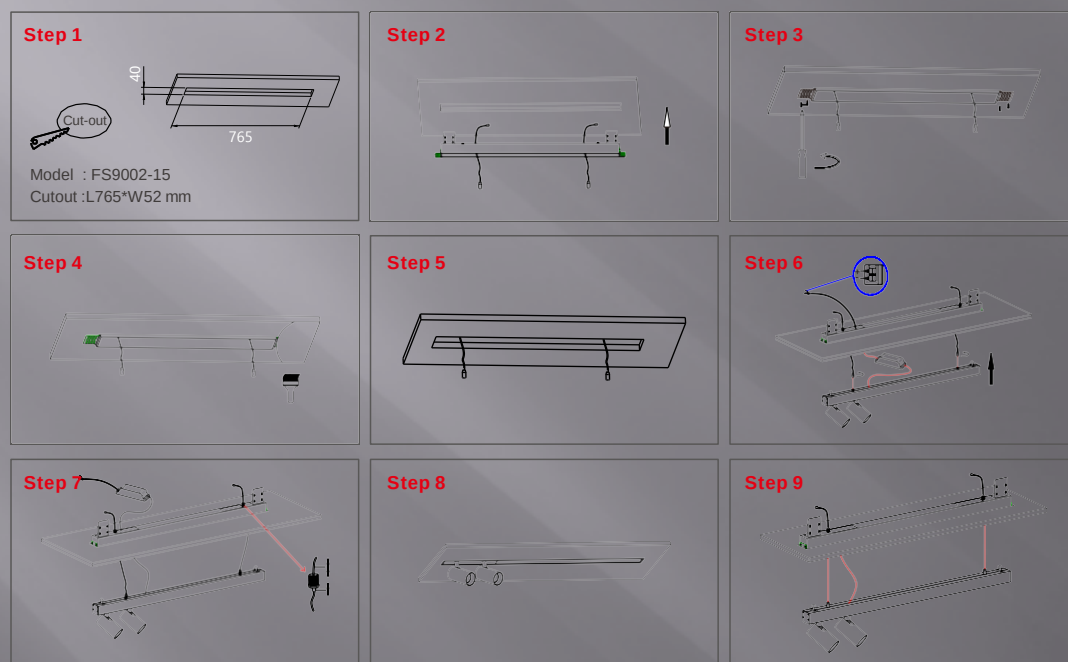

Standard length:650/760/1200mm(details refer to left drawing),
Length can be customize by jointing.
Cutout: Width 40mm, Length refer to what selected

FS9002 Multiple Installation Lamp

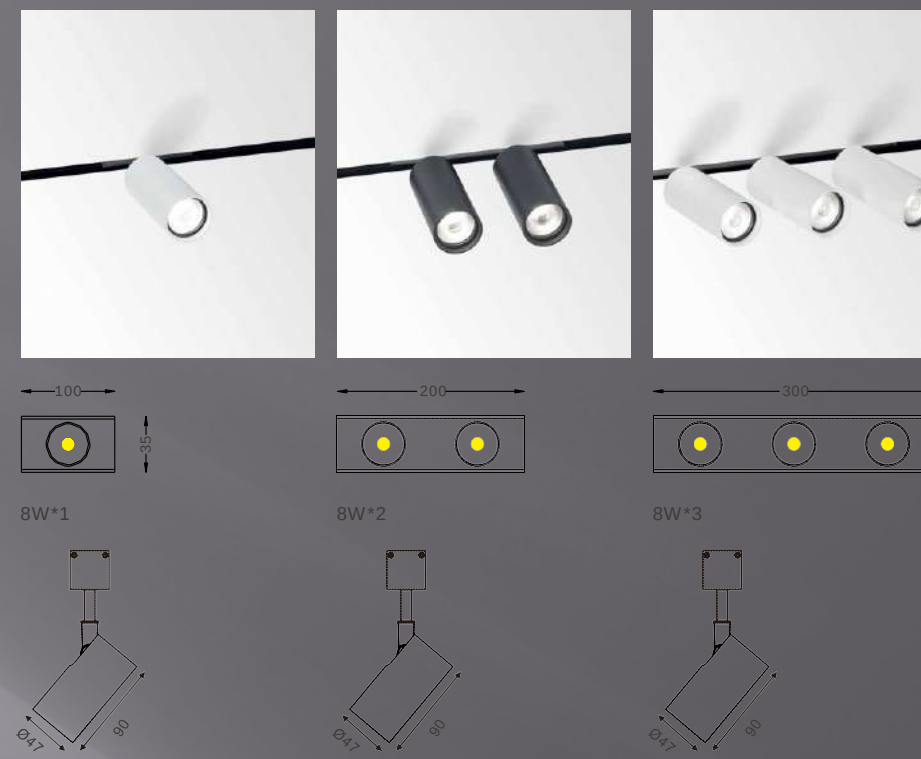

LED CEILING DOWNLIGHT SERIES


MODULIS



Surface light



Track light

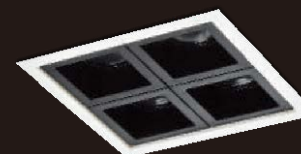

Ceiling light



Ceiling light



Recessed linear light



Linear light



**FS2037-05**


Max.5W

Operating Temp. : -30°C + 40°C
4.5W SMD chip (DC1500mA)





- 2700K/300lm Ra90
- 3000K/330lm Ra90
- 4000K/375lm Ra80
- 5000K/425lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Dali/0~10v/Triac

Beam angle



Color selection

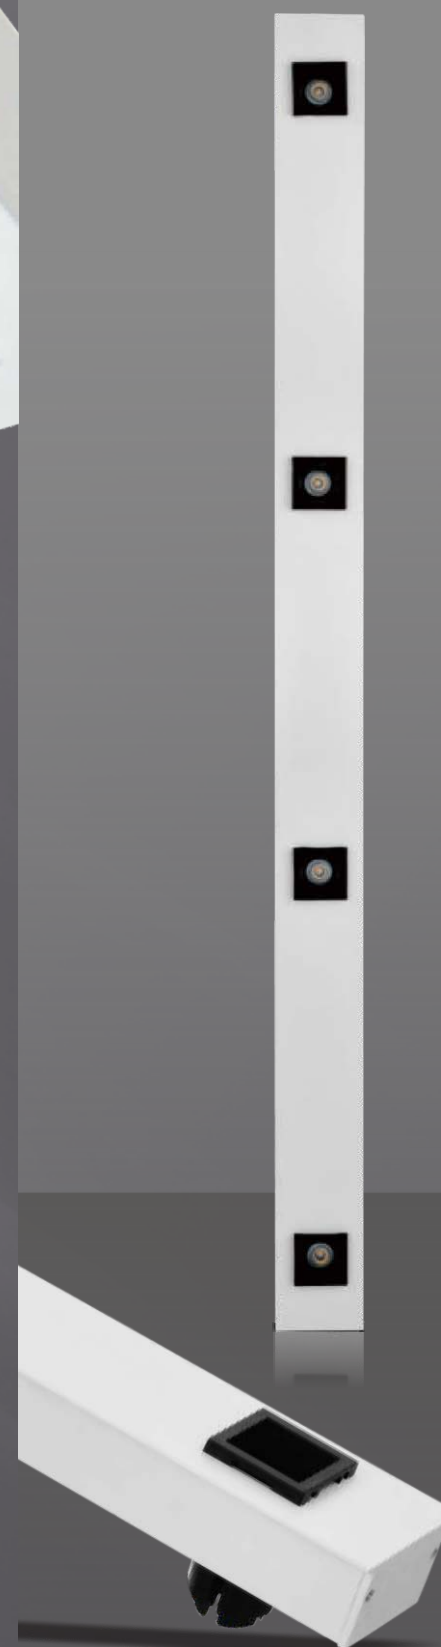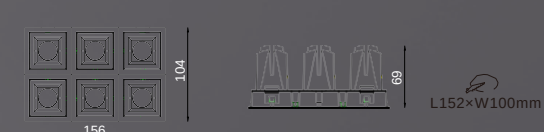**FS2037-05****FS2037-10****FS2037-15****FS2037-20****FS2037-20****FS2037-30**




EDONIS



Recessed LED adjustable spot light with high purity molding, excellent and life-guaranteed heat sink design, 360° horizontally 45° tilt provides flexible projection demand .

Application: fashion shop, jewelry display and other high end accent lighting areas.



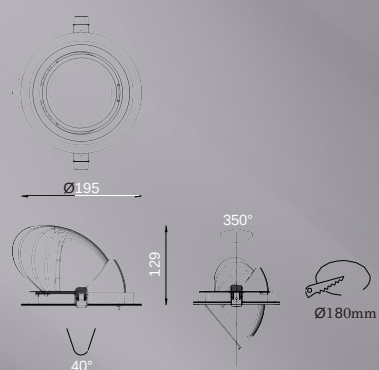

FS1075-30

Max.30W

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)



- 2700K/2107lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

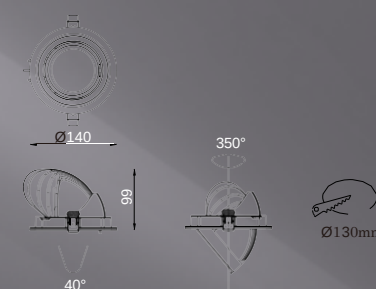

FS1074-20


Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)

- 2700K/1405lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



**FS1073-15**


Max.15W

Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1200lm Ra90
- 4000K/1370lm Ra80
- 5000K/1550lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection






Recessed LED Retracted spot light with high purity molding, slide up-and-down positioning design and 360° horizontally 90° vertically provides flexible projection demand .
Application: fashion shop, jewelry display and other high end accent lighting areas.

EDONIS

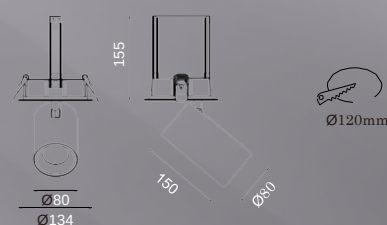

**FS1064-30**


Max.30W

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)



- 2700K/2017lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

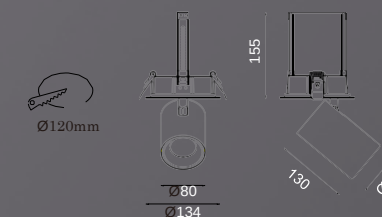**FS1064-20**


Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)

- 2700K/1405lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

**FS1064-15**


Max.15W

Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1200lm Ra90
- 4000K/1370lm Ra80
- 5000K/1550lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection






EDONIS




Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle reflector for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.






Operating Temp. : -30°C + 40°C
32W COB chip (DC800mA) /FS5045-35
2700K/2625lm Ra90
3000K/2900lm Ra90
4000K/3300lm Ra80
5000K/3675lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac





Model	P	H
FS5045-30	Max.30W	116
FS5045-35	Max.35W	126
FS5045-42	Max.42W	141




Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)/FS5045-15
2700K/1050lm Ra90
3000K/1200lm Ra90
4000K/1370lm Ra80
5000K/1550lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Model	P	H
FS5045-15	Max.15W	82
FS5045-22	Max.22W	97



FS5075A-09
Max.9W

Operating Temp. : -30°C + 40°C
7.5W COB chip (DC200mA)
2700K/630lm Ra90
3000K/702lm Ra90
4000K/783lm Ra80
5000K/864lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac






EDONIS



Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle reflector for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.





FS5088-20

Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)


- 2700K/1264lm Ra90
- 3000K/1440lm Ra90
- 4000K/1665lm Ra80
- 5000K/1890lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle





Color selection



Frosted Glass

Clear Glass



FS5086-20


Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)


- 2700K/1264lm Ra90
- 3000K/1440lm Ra90
- 4000K/1665lm Ra80
- 5000K/1890lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection




Frosted Glass

Clear Glass

Beam angle



Color selection




Frosted Glass

Clear Glass

Operating Temp. : -30°C + 40°C
10W COB chip (DC250mA)/FS5086-11
2700K/759lm Ra90
3000K/770lm Ra90
4000K/913lm Ra80
5000K/935lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali


Model	P	H
FS5086-11	Max.11W	85.5
FS5086-15	Max.15W	100






Model	P	H
FS5088-11	Max.11W	85.5
FS5088-15	Max.15W	100

Operating Temp. : -30°C + 40°C
10W COB chip (DC250mA) FS5088-11
2700K/759lm Ra90
3000K/770lm Ra90
4000K/913lm Ra80
5000K/935lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali



Color selection
B S W

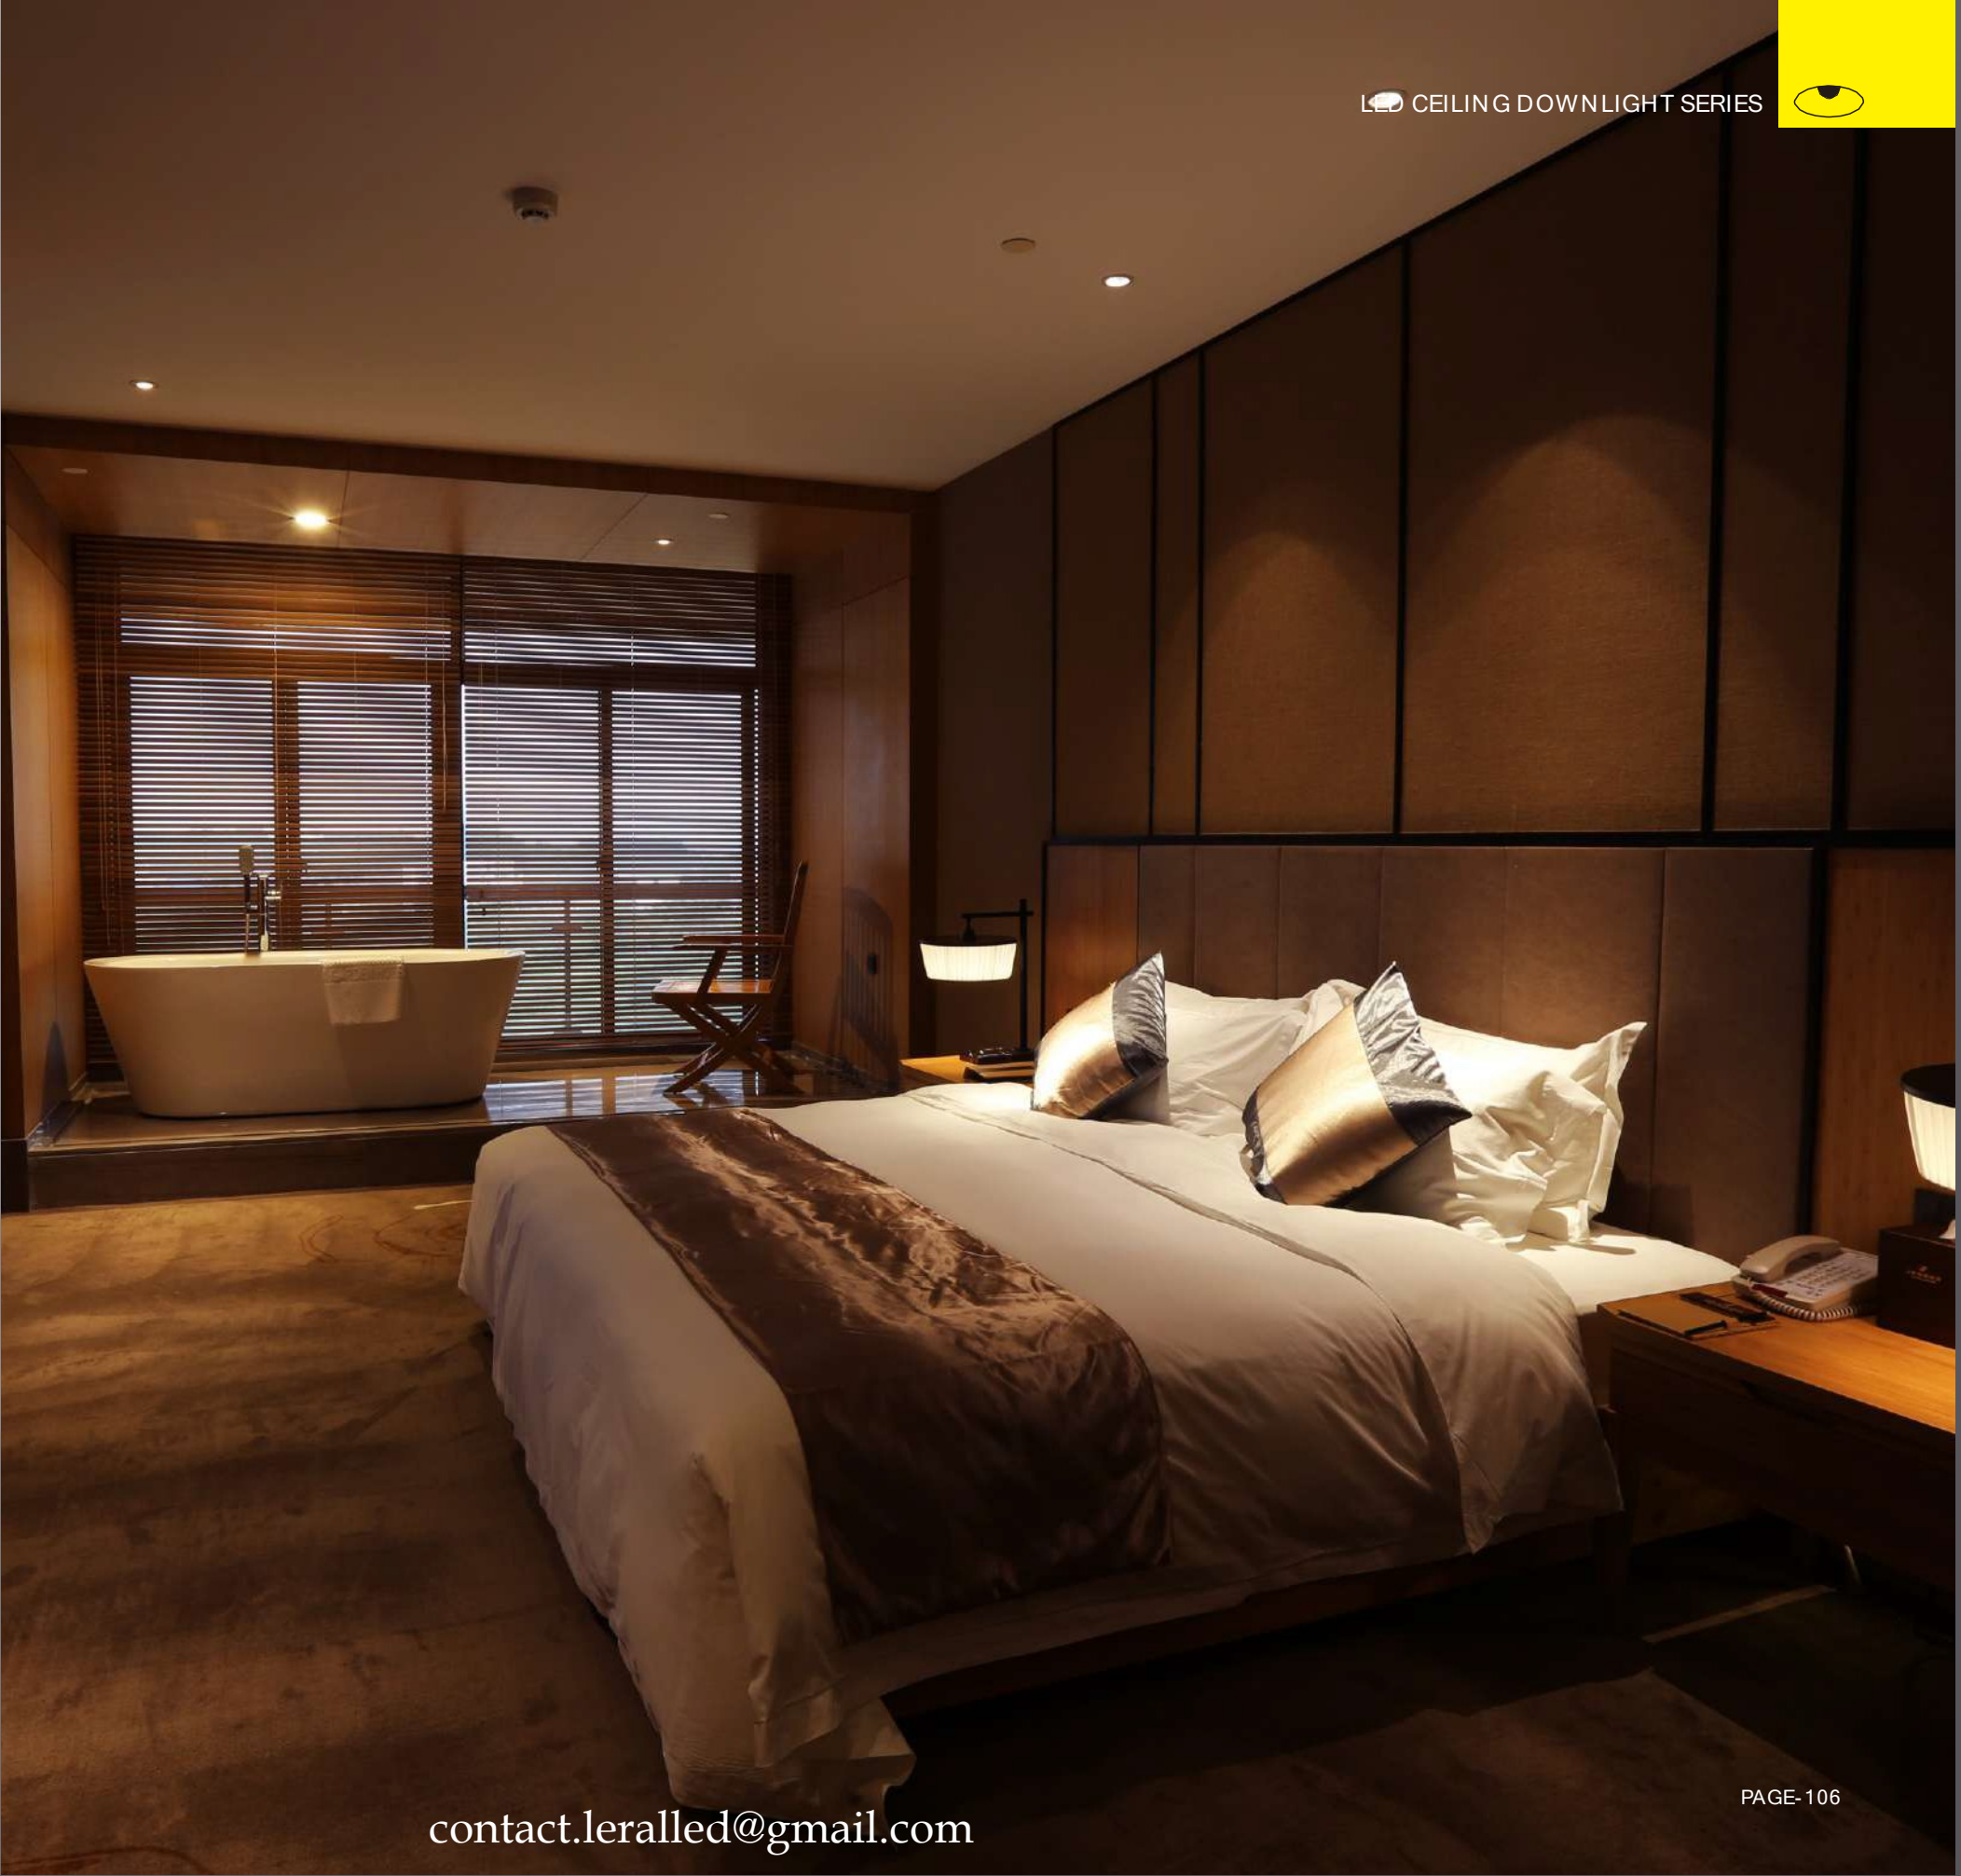




**FS1014-15**

Max.15W

Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)

- 2700K/990lm Ra90
- 3000K/1110lm Ra90
- 4000K/1255lm Ra80
- 5000K/1390lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection



Frosted Glass



Clear Glass

**FS1013-09**

Max.9W


Operating Temp. : -30°C + 40°C
7.5W COB chip (DC200mA)

- 2700K/600lm Ra90
- 3000K/670lm Ra90
- 4000K/750lm Ra80
- 5000K/820lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection



Frosted Glass



Clear Glass


**FS1012-05**

Max.5W


Operating Temp. : -30°C + 40°C
4.5W COB chip (DC500mA)

- 2700K/350lm Ra90
- 3000K/380lm Ra90
- 4000K/420lm Ra80
- 5000K/470lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection



Frosted Glass



Clear Glass





LED CEILING DOWNLIGHT SERIES



Ultra-narrow width design, make your decoration effect more artistic and modern
Simple, elegant, unique design, easy to disassemble
Perfect light shape, lighting designers' first option
2 styles(adjustable/non-adjustable)for selection



Frosted Glass




Clear Glass

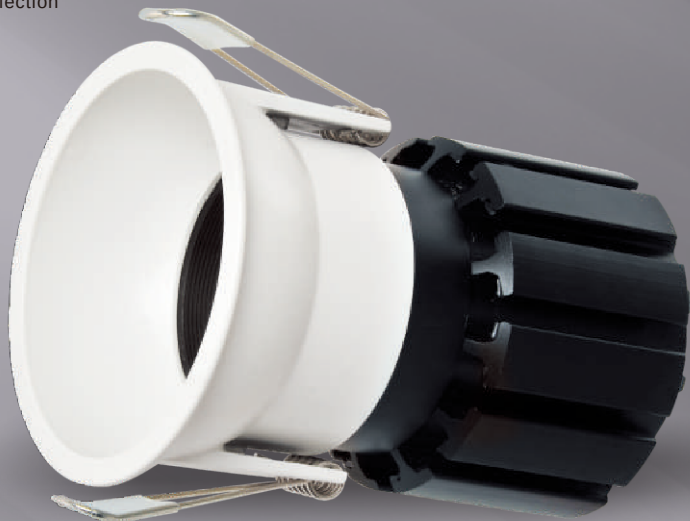

Simple, elegant, unique design,
easy to disassemble



Soft and uniform light spot,
no stray light.




Perfect light shape, makes
a comfortable, luxurious
visual effect, The Lighting
Designers' first option.




Model	P	H
FS5071-12	Max.12W	120
FS5071-18	Max.18W	130

Operating Temp. : -30°C + 40°C
12W / 16W COB chip (DC300mA / DC450mA)
■ 2700K/851lm 1260lm Ra90
■ 3000K/936lm 1368lm Ra90
■ 4000K/1056lm 1584lm Ra80
■ 5000K/1176lm 1728lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle




Color selection




Model	P	H
FS5073-12	Max.12W	115
FS5073-18	Max.18W	125

Operating Temp. : -30°C + 40°C
12W / 16W COB chip (DC300mA / DC450mA)
■ 2700K/851lm 1260lm Ra90
■ 3000K/936lm 1368lm Ra90
■ 4000K/1056lm 1584lm Ra80
■ 5000K/1176lm 1728lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

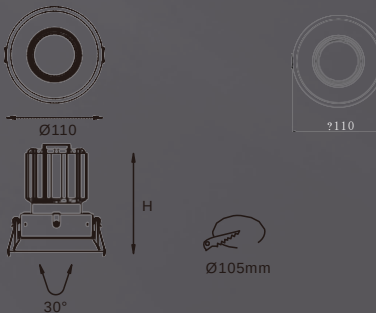

Beam angle



Color selection






EDONIS



Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle reflector for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.



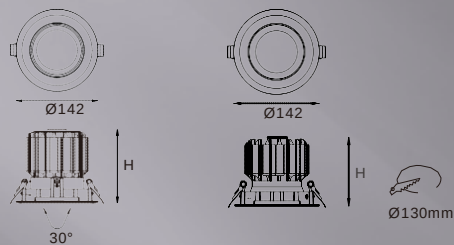

FS5070-30

FS5080-30

Model	P	H
FS5070-30	Max.30W	113
FS5070-35	Max.35W	123
FS5080-30	Max.30W	106
FS5080-35	Max.35W	116

Operating Temp. : -30°C + 40°C
26W / 30W COB chip (DC700mA / DC800mA)
■ 2700K/2115lm 2450lm Ra90
■ 3000K/2280lm 2735lm Ra90
■ 4000K/2640lm 3080lm Ra80
■ 5000K/2910lm 3435lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass





Clear Glass

Beam angle



Color selection



Model	P	H
FS1060-30	Max.30W	128
FS1060-35	Max.35W	138
FS1060-42	Max.42W	153

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA) / FS1060-30
■ 2700K/2107lm Ra90
■ 3000K/2340lm Ra90
■ 4000K/2645lm Ra80
■ 5000K/2943lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass





Clear Glass

Beam angle



Color selection





Model	P	H
FS5041-15	Max.15W	82
FS5042-22	Max.22W	97

Operating Temp. : -30°C + 40°C
13W / 19W COB chip (DC350mA / DC500mA)
■ 2700K/1050lm 1543lm Ra90
■ 3000K/1170lm 1716lm Ra90
■ 4000K/1326lm 1936lm Ra80
■ 5000K/1470lm 2156lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass





Clear Glass

Beam angle



Color selection



FS5103-09
Max.9W

Operating Temp. : -30°C + 40°C
7.5W COB chip (DC200mA)
■ 2700K/600lm Ra90
■ 3000K/670lm Ra90
■ 4000K/750lm Ra80
■ 5000K/820lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Frosted Glass





Clear Glass

Beam angle



Color selection





FS5072-25

Max.25W

Operating Temp. : -30°C + 40°C

23W COB chip (DC600mA)

2700K/1750lm Ra90

3000K/1975lm Ra90

4000K/2250lm Ra80

5000K/2450lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI0~10v/Triac




Frosted Glass




Clear Glass

Beam angle



Color selection





EDONIS



FS5201-05

Max.5W

Operating Temp. : -30°C + 40°C

4.5W SMD chip (DC1500mA)


- 2700K/315lm Ra90
- 3000K/342lm Ra90
- 4000K/378lm Ra80
- 5000K/423lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac

Beam angle



Color selection



**FS5040-05**

Max.5W

Operating Temp. : -30°C + 40°C


4.5W COB chip (DC500mA)

- 2700K/350lm Ra90
- 3000K/380lm Ra90
- 4000K/420lm Ra80
- 5000K/470lm Ra70


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac



Beam angle



Color selection

**FS5053-05**

Max.5W

Operating Temp. : -30°C + 40°C


4.5W COB chip (DC500mA)

- 2700K/365lm Ra90
- 3000K/397lm Ra90
- 4000K/443lm Ra80
- 5000K/490lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0~10v/Triac




Frosted Glass




Clear Glass

Beam angle



Color selection

**FS5040-02**

Max.2W

Operating Temp. : -30°C + 40°C


1.5W SMD chip (DC500mA)

- 2700K/145lm Ra90
- 3000K/156lm Ra90
- 4000K/177lm Ra80
- 5000K/198lm Ra70


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: 0~10v/Triac



Beam angle




Color selection





EDONIS



FS1022-16

Max.16W

Operating Temp. : -30°C + 40°C

14W COB chip (DC600mA)


- 2700K/1120lm Ra90
- 3000K/1248lm Ra90
- 4000K/1408lm Ra80
- 5000K/1568lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS5076-14

Max.16W

Operating Temp. : -30°C + 40°C

14W COB chip (DC600mA)


- 2700K/1120lm Ra90
- 3000K/1248lm Ra90
- 4000K/1408lm Ra80
- 5000K/1568lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





FS1007-09

Max.9W

Operating Temp. : -30°C + 40°C

7.5W COB chip (DC200mA)

- 2700K/635lm Ra90
- 3000K/712lm Ra90
- 4000K/792lm Ra80
- 5000K/886lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS1008-09

Max.9W

Operating Temp. : -30°C + 40°C

7.5W COB chip (DC200mA)

- 2700K/635lm Ra90
- 3000K/712lm Ra90
- 4000K/792lm Ra80
- 5000K/886lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS5075-09

Max.9W

Operating Temp. : -30°C + 40°C

7.5W COB chip (DC200mA)

- 2700K/635lm Ra90
- 3000K/712lm Ra90
- 4000K/792lm Ra80
- 5000K/886lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection





FS1061-09

Max.9W

Operating Temp. : -30°C + 40°C

7.5W COB chip (DC200mA)


- 2700K/635lm Ra90
- 3000K/712lm Ra90
- 4000K/792lm Ra80
- 5000K/886lm Ra70

Remote Driver: AC100-240V 50/60Hz



Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



Model	P	H
FS1061B-09	Max.9W	108
FS1061B-15	Max.15W	122

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA) / FS1061B-15

- 2700K/1120lm Ra90
- 3000K/1286lm Ra90
- 4000K/1440lm Ra80
- 5000K/1568lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac

Beam angle




Color selection





Simple and special design for easy dismounting, One module with different optional front housing
Two Wattage (13/26W) for selecting.

•

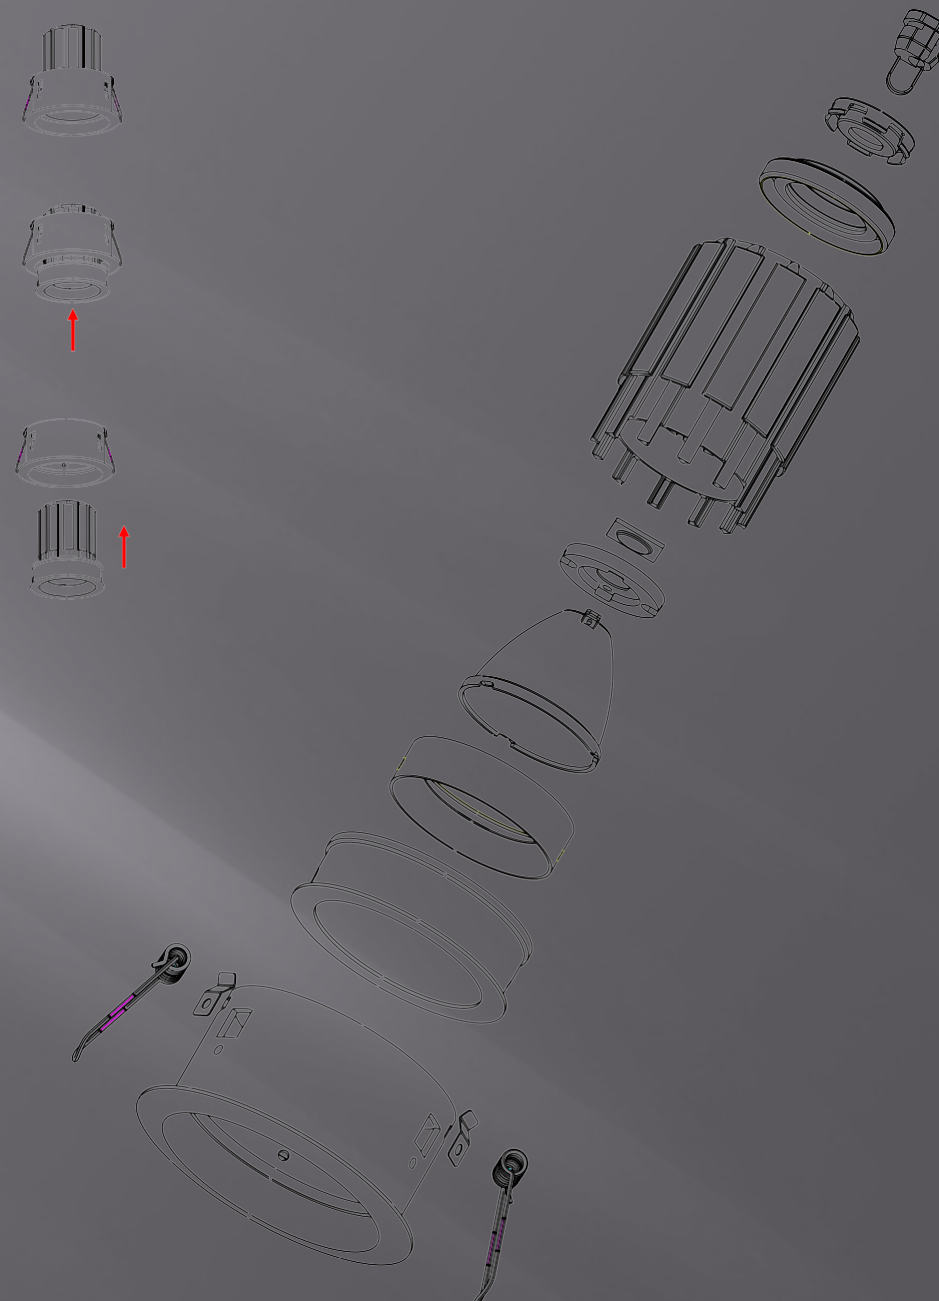



LED CEILING DOWNLIGHT SERIES

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac



Frosted Glass



Clear Glass



FS5047-13

Max.13W


Operating Temp. : -30°C + 40°C
11W COB chip (DC350mA)

- 2700K/926lm Ra90
- 3000K/1019lm Ra90
- 4000K/1144lm Ra80
- 5000K/1275lm Ra70

Beam angle



Color selection



FS5049-26

Max.26W


Operating Temp. : -30°C + 40°C
23W COB chip (DC600mA)

- 2700K/1825lm Ra90
- 3000K/2028lm Ra90
- 4000K/2288lm Ra80
- 5000K/2548lm Ra70

Beam angle




Color selection




LED CEILING DOWNLIGHT SERIES




FS5048-13




FS5050-26




FS-5048A-13




FS5050A-26




FS5047-13




FS5049-26




FS5047A-13



FS5049A-26







Model	P	H	H1
FS4010A-12	Max.12W	162	108
FS4010A-18	Max.18W	180	128
FS4010A-22	Max.22W	187	138

Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA) / FS4010A-18
■ 2700K/1260lm Ra90
■ 3000K/1418lm Ra90
■ 4000K/1585lm Ra80
■ 5000K/1764lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI 0~10v/Triac



FS4001A-26
Max.26W


Operating Temp. : -30°C + 40°C
23W COB chip (DC600mA)
■ 2700K/1820lm Ra90
■ 3000K/2028lm Ra90
■ 4000K/2288lm Ra80
■ 5000K/2548lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac





EDONIS



Model	P	H
FS5077-15	Max. 15W	86
FS5077-25	Max. 25W	106
FS5077-42	Max. 42W	136

Operating Temp. : -30°C + 40°C

38W COB chip (DC1000mA) / FS5077-42

- 2700K/2958lm Ra90
- 3000K/3360lm Ra90
- 4000K/3696lm Ra80
- 5000K/4116lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0-10v/Triac




Frosted Glass





Clear Glass

Beam angle



Color selection





FS5052-20

Max.18W

Operating Temp. : -30°C + 40°C

17.5W COB chip (DC500mA)

- 2700K/1418lm Ra90
- 3000K/1560lm Ra90
- 4000K/1760lm Ra80
- 5000K/1960lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac




Frosted Glass





Clear Glass

Beam angle



Color selection



FS5051-12

Max.12W

Operating Temp. : -30°C + 40°C

11W COB chip (DC300mA)

- 2700K/840lm Ra90
- 3000K/936lm Ra90
- 4000K/1056lm Ra80
- 5000K/1176lm Ra70

Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0~10v/Triac




Frosted Glass



Clear Glass

Beam angle




Color selection



EDONIS

TRIMLESS CEILING DOWNLIGHT SERIES

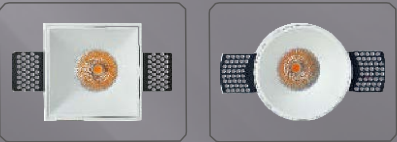



Frosted Glass










Clear Glass

COB lighting source + high-quality optical lens, softens light ; aluminum radiator,extend life.
Lamps trimless installation, better integration of the structure of the room,
to retain the original decoration style



Trimless Installation steps





FS5093-20


Max.20W

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)



- 2700K/1300lm Ra90
- 3000K/1520lm Ra90
- 4000K/1700lm Ra80
- 5000K/1840lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS5093-05

Max.5W

Operating Temp. : -30°C + 40°C
4.5W COB chip (DC500mA)


- 2700K/325lm Ra90
- 3000K/380lm Ra90
- 4000K/425lm Ra80
- 5000K/460lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



Model	P	H
FS5093-09	Max.9W	100
FS5093-15	Max.15W	115

Operating Temp. : -30°C + 40°C
13.5W COB chip (DC350mA)/FS5093-15


- 2700K/1050lm Ra90
- 3000K/1080lm Ra90
- 4000K/1250lm Ra80
- 5000K/1320lm Ra70



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10v/Triac

Beam angle



Color selection







FS5093A-20

Max.20W

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)

2700K/1300lm	Ra90
3000K/1520lm	Ra90
4000K/1700lm	Ra80
5000K/1840lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




FS5093A-05

Max.5W

Operating Temp. : -30°C + 40°C
4.5W COB chip (DC500mA)

2700K/325lm	Ra90
3000K/380lm	Ra90
4000K/425lm	Ra80
5000K/460lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Model	P	H
FS5093A-09	Max.9W	100
FS5093A-15	Max.15W	115

Operating Temp. : -30°C + 40°C
13.5W COB chip (DC350mA)/FS5093A-15

2700K/1050lm	Ra90
3000K/1080lm	Ra90
4000K/1250lm	Ra80
5000K/1320lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



LED Modules series




Front Ring optional colors





FS1059A-15



FS1059-09

Max.9W

Operating Temp. : -30°C + 40°C

7.5W COB chip (DC200mA)


- 2700K/630lm Ra90
- 3000K/703lm Ra90
- 4000K/783lm Ra80
- 5000K/864lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS1059A-15



FS1059-15

Max.15W

Operating Temp. : -30°C + 40°C

13.5W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1170lm Ra90
- 4000K/1305lm Ra80
- 5000K/1440lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection



Item: FS1059-09-A
Size: Ø80mm
Cut out:75mm




Item: FS1059-09-B
Size: Ø80mm
Cut out:75mm

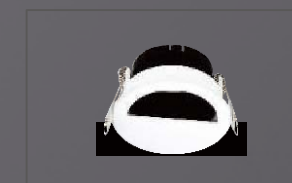

Item: FS1059-09-D
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-E
Size: Ø80mm
Cut out:70mm

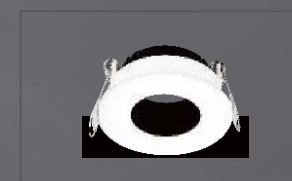

Item: FS1059-09-F
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-G
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-H
Size: Ø91mm
Cut out:92mm



Item: FS1059-09-J
Size: SQ82mm
Cut out:SQ78mm



Item: FS1059-09-K
Size: SQ82mm
Cut out:SQ78mm



Item: FS1059-09-L
Size: SQ84*75mm
Cut out:SQ85*76mm



Item: FS1059-09-N
Size: Ø95mm
Cut out:85mm



Item: FS1059-09-O
Size: SQ95mm
Cut out:SQ85mm



Item: FS5101-09
Size: Ø82mm
Cut out:Ø85mm



Item: FS5101A-09
Size: SQ73mm
Cut out:SQ75mm

LED HOTEL DOWN LIGHT





LED HOTEL DOWN LIGHT SERIES


Recessed LED wall washer with white powder coated anti-glare die-cast housing, high thermal conductive heat sink and energy efficient electronic driver, Different shape of housing can be chosen in different application .
Application:living rooms, corridors, shops, shopping mall, hotel, restaurants.



EDONIS



LED HOTEL DOWN LIGHTSERIES



Model	P	H
FS6001-09	Max.9W	104
FS6001-15	Max.15W	116

Operating Temp. : -30°C + 40°C
7.5W / 13.5W COB chip (DC200mA / DC350mA)
■ 2700K/639lm 1065lm Ra90
■ 3000K/702lm 1170lm Ra90
■ 4000K/792lm 1320lm Ra80
■ 5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac





Frosted Glass Clear Glass



Beam angle



Color selection



Model	P	H
FS6002-09	Max.9W	104
FS6002-15	Max.15W	116

Operating Temp. : -30°C + 40°C
7.5W / 13.5W COB chip (DC200mA / DC350mA)
■ 2700K/639lm 1065lm Ra90
■ 3000K/702lm 1170lm Ra90
■ 4000K/792lm 1320lm Ra80
■ 5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass Clear Glass

Beam angle:15 ° /25 ° /36 °




Color selection







LED HOTEL DOWN LIGHT SERIES



Model	P	H
FS6003-09	Max.9W	104
FS6003-15	Max.15W	116

Operating Temp. : -30°C + 40°C
7.5W / 13.5W COB chip (DC200mA / DC350mA)
2700K/639lm 1065lm Ra90
3000K/702lm 1170lm Ra90
4000K/792lm 1320lm Ra80
5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Model	P	H
FS6004-09	Max.9W	104
FS6004-15	Max.15W	116

Operating Temp. : -30°C + 40°C
7.5W / 13.5W COB chip (DC200mA / DC350mA)
2700K/639lm 1065lm Ra90
3000K/702lm 1170lm Ra90
4000K/792lm 1320lm Ra80
5000K/882lm 1425lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



LED HOTEL DOWN LIGHTSERIES





EDONIS



Model	P	H
FS6012A-15	Max.15W	126
FS6012A-20	Max.20W	141

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)/FS6012A-20
■ 2700K/1260lm Ra90
■ 3000K/1418lm Ra90
■ 4000K/1585lm Ra80
■ 5000K/1764lm Ra70



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Model	P	H
FS6012-15	Max.15W	126
FS6012-20	Max.20W	141

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)/FS6012-20
■ 2700K/1260lm Ra90
■ 3000K/1418lm Ra90
■ 4000K/1585lm Ra80
■ 5000K/1764lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac






Clear Glass



Frosted Glass



FS6013-50W

Max.50W

Operating Temp. : -30°C + 40°C

45W COB chip (DC1200mA)

2700K/3250lm Ra90

3000K/3800lm Ra90

4000K/4250lm Ra80

5000K/4600lm Ra70

Remote Driver: AC100-240V 50/60Hz


Driver performance: Non-dimmable/dimmable


Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection







Model	P	H
FS6010-30	Max.30W	151
FS6010-42	Max.42W	176

Operating Temp. : -30°C + 40°C
27W COB chip (DC700mA)/FS6010-30
2700K/2106lm Ra90
3000K/2280lm Ra90
4000K/2640lm Ra80
5000K/2880lm Ra70



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Model	P	H
FS6006-20	Max.20W	139
FS6006-30	Max.30W	154
FS6006-42	Max.42W	179

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)/FS6006-20
2700K/1260lm Ra90
3000K/1418lm Ra90
4000K/1585lm Ra80
5000K/1764lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Model	P	H
FS6007-20	Max.20W	139
FS6007-30	Max.30W	154
FS6007-42	Max.42W	179

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)/FS6007-20
2700K/1260lm Ra90
3000K/1418lm Ra90
4000K/1585lm Ra80
5000K/1764lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle:15 ° /25 ° /38 °



LED WALL WASH



Made of high quality die-casting aluminum Housing and unique cooling system design.
LEDIL unique Polarizing optics design reflector with a softer and better light output.
Different polarizing optics design make different visual aesthetic.



LED WALL WASH SERIES




FS6011-25

Max.25W

Operating Temp. : -30°C + 40°C
22W COB chip (DC600mA)

- 2700K/1725lm Ra90
- 3000K/1825lm Ra90
- 4000K/2000lm Ra80
- 5000K/2125lm Ra70



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



Beam angle



Color selection




FS5039-12

Max.12W

Operating Temp. : -30°C + 40°C
10W COB chip (DC250mA)

- 2700K/845lm Ra90
- 3000K/936lm Ra90
- 4000K/1068lm Ra80
- 5000K/1165lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac




Beam angle



Color selection






Model	P	H
FS1065-09	Max.9W	97
FS1065-15	Max.15W	112

Operating Temp. : -30°C + 40°C
13.5W COB chip (DC350mA)/FS1065-15
■ 2700K/975lm Ra90
■ 3000K/1140lm Ra90
■ 4000K/1275lm Ra80
■ 5000K/1380lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




LED HOUSEHOLD SOTRE & RECESSED GRILLE LIGHT

EDONIS



360° rotatable can also adjustable, to meet different requirement of lighting.
Anti-Glare & focuse light design, specialize for furniture sotre as well as
Exclusive Shop.
Round & Square shape with all wattage series included to meet the different
design requirement.





FS1062-20


Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)



2700K/1400lm	Ra90
3000K/1430lm	Ra90
4000K/1600lm	Ra80
5000K/1650lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS1062-13


Max.13W

Operating Temp. : -30°C + 40°C
11W COB chip (DC300mA)



2700K/910lm	Ra90
3000K/950lm	Ra90
4000K/1066lm	Ra80
5000K/1105lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS1062-30


Max.30W

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)


2700K/2100lm	Ra90
3000K/2190lm	Ra90
4000K/2350lm	Ra80
5000K/2450lm	Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



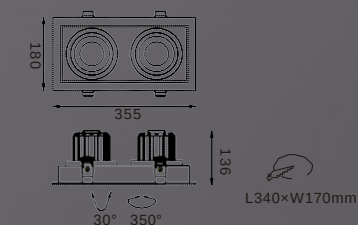**FS2018A-35**

Max.2×35W

Operating Temp. : -30°C + 40°C
 2×32W COB chip (DC800mA)

- 2700K/4915lm Ra90
- 3000K/5390lm Ra90
- 4000K/5950lm Ra80
- 5000K/6720lm Ra70

Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: 0-10V/Triac/Dali




Frosted Glass




Clear Glass

Beam angle



Color selection

**FS2019A-35**

Max.35W

Operating Temp. : -30°C + 40°C
 32W COB chip (DC800mA)

- 2700K/2450lm Ra90
- 3000K/2730lm Ra90
- 4000K/3080lm Ra80
- 5000K/3360lm Ra70

Remote Driver: AC100-240V 50/60Hz
 Driver performance: Non-dimmable/dimmable
 Dimmer: 0-10V/Triac/Dali




Frosted Glass



Clear Glass


Beam angle



Color selection



Recess Grille downlight with quality aluminum body in powder-coated, with multiple reflecting angles, excellent heatsink capability to minimize degradation of the lumens. remote LED driver.
 Application: star hotel, museum, exhibition hall, shopping malls, brandchain stores and so on.

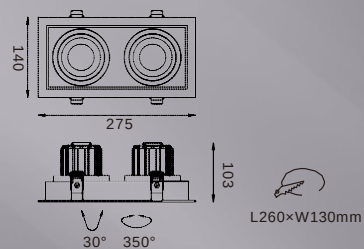

FS2022A-15


Max.2*15W

Operating Temp. : -30°C + 40°C
2*13W COB chip (DC350mA)


- 2700K/2100lm Ra90
- 3000K/2160lm Ra90
- 4000K/2500lm Ra90
- 5000K/2640lm Ra90

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection




FS2023A-15

Max.15W


Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)

- 2700K/1050lm Ra90
- 3000K/1080lm Ra90
- 4000K/1250lm Ra90
- 5000K/1320lm Ra90



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



Beam angle



Color selection



FS2027A-13


Max.13W

Operating Temp. : -30°C + 40°C
11W COB chip (DC300mA)


- 2700K/910lm Ra90
- 3000K/950lm Ra90
- 4000K/1066lm Ra80
- 5000K/1105lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



**FS2029-16**

Max.16W

Operating Temp. : -30°C + 40°C
14W COB chip (DC700mA)


2700K/1104lm	Ra80
3000K/1168lm	Ra80
4000K/1248lm	Ra80
5000K/1280lm	Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle: 7° / 14° / 25° /
46° / 9+41°



Color selection


**FS2030-30**

Max.30W

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)

2700K/2070lm	Ra80
3000K/2250lm	Ra80
4000K/2350lm	Ra80
5000K/2460lm	Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Beam angle: 7° / 14° / 25° /
46° / 9+41°



Color selection





Fs2026 -10

Max.2*5W

Operating Temp. : -30°C + 40°C
2*4.5W COB chip (DC500mA)

- 2700K/600lm Ra90
- 3000K/680lm Ra90
- 4000K/840lm Ra80
- 5000K/1000lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Frosted Glass





Clear Glass

Beam angle



Color selection

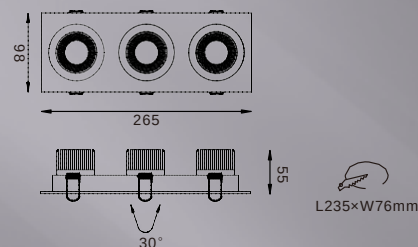

FS2026-15

Max.3*5W

Operating Temp. : -30°C + 40°C
3*4.5W COB chip (DC500mA)

- 2700K/900lm Ra90
- 3000K/1020lm Ra90
- 4000K/1260lm Ra80
- 5000K/1500lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Frosted Glass





Clear Glass

Beam angle



Color selection



FS2026-5

Max.5W

Operating Temp. : -30°C + 40°C
4.5W COB chip (DC500mA)

- 2700K/300lm Ra90
- 3000K/340lm Ra90
- 4000K/420lm Ra80
- 5000K/500lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Frosted Glass




Clear Glass

Beam angle



Color selection





FS2027-13

Max.13W

Operating Temp. : -30°C + 40°C
11W COB chip (DC300mA)


- 2700K/897lm Ra90
- 3000K/936lm Ra90
- 4000K/1050lm Ra80
- 5000K/1066lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




Frosted Glass Clear Glass

Beam angle



Color selection



LED DOWN LIGHT SERIES

CIRCULIS

Ip65 Recessed mounted circular LED downlight luminaire with die-cast aluminium housing in white powder coating finish, specially designed heatsink, anti glare diffuser and separate energy efficient electronic driver.
Application:living rooms, corridors, shops, shopping mall, hotel.






FS3033-20
Max.20W


Operating Temp. : -30°C + 40°C
SMD2835*112PCS (DC700mA)
■ 2700K/1425lm Ra90
■ 3000K/1520lm Ra90
■ 4000K/1710lm Ra80
■ 5000K/1900lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection




FS3032-15
Max.15W



Operating Temp. : -30°C + 40°C
SMD2835*84PCS (DC350mA)
■ 2700K/1125lm Ra90
■ 3000K/1200lm Ra90
■ 4000K/1350lm Ra80
■ 5000K/1500lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection




FS3031-10
Max.10W


Operating Temp. : -30°C + 40°C
SMD2835*54PCS (DC300mA)
■ 2700K/750lm Ra90
■ 3000K/800lm Ra90
■ 4000K/900lm Ra80
■ 5000K/1000lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection






CIRCULIS







FS3028-25
Max.25W

Operating Temp. : -30°C + 40°C
22W COB chip (DC600mA)
2700K/1750lm Ra90
3000K/1950lm Ra90
4000K/2125lm Ra80
5000K/2250lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




FS3028-20
Max.20W

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)
2700K/1400lm Ra90
3000K/1560lm Ra90
4000K/1700lm Ra80
5000K/1800lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali




FS3028-12
Max.12W

Operating Temp. : -30°C + 40°C
10.5W COB chip (DC300mA)
2700K/840lm Ra90
3000K/936lm Ra90
4000K/1020lm Ra80
5000K/1080lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



FS3028-08
Max.8W

Operating Temp. : -30°C + 40°C
7W COB chip (DC350mA)
2700K/560lm Ra90
3000K/624lm Ra90
4000K/680lm Ra80
5000K/720lm Ra70
Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali






CIRCULIS



Recessed mounted circular LED down light luminaire with die-cast aluminium housing in white powder coating finish, specially designed heatsink, anti glare diffuser and separate energy efficient electronic.
Application: living rooms, corridors, shops, shopping mall, hotel. driver.





FS3002-24


Max.24W

Operating Temp. : -30°C + 40°C
SMD2835*126PCS (DC700mA)



- 2700K/1800lm Ra90
- 3000K/1920lm Ra90
- 4000K/2160lm Ra80
- 5000K/2400lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS3001-19


Max.19W

Operating Temp. : -30°C + 40°C
SMD2835*112PCS (DC700mA)



- 2700K/1425lm Ra90
- 3000K/1520lm Ra90
- 4000K/1710lm Ra80
- 5000K/1900lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS3022-15

Max.15W

Operating Temp. : -30°C + 40°C
SMD2835*84PCS (DC350mA)



- 2700K/1125lm Ra90
- 3000K/1200lm Ra90
- 4000K/1350lm Ra80
- 5000K/1500lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



FS3021-13

Max.13W

Operating Temp. : -30°C + 40°C
SMD2835*72PCS (DC300mA)


- 2700K/975lm Ra90
- 3000K/1040lm Ra90
- 4000K/1170lm Ra80
- 5000K/1300lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection



**FS3020-10**

Max.10W

Operating Temp. : -30°C + 40°C
SMD2835*54PCS (DC300mA)



- 2700K/750lm Ra90
- 3000K/800lm Ra90
- 4000K/900lm Ra80
- 5000K/1000lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection

**FS3023-07**

Max.7W

Operating Temp. : -30°C + 40°C
SMD2835*36PCS (DC300mA)


- 2700K/525lm Ra90
- 3000K/560lm Ra90
- 4000K/630lm Ra80
- 5000K/700lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection





LED SURFACE / SUSPENSION LAMP SERIES

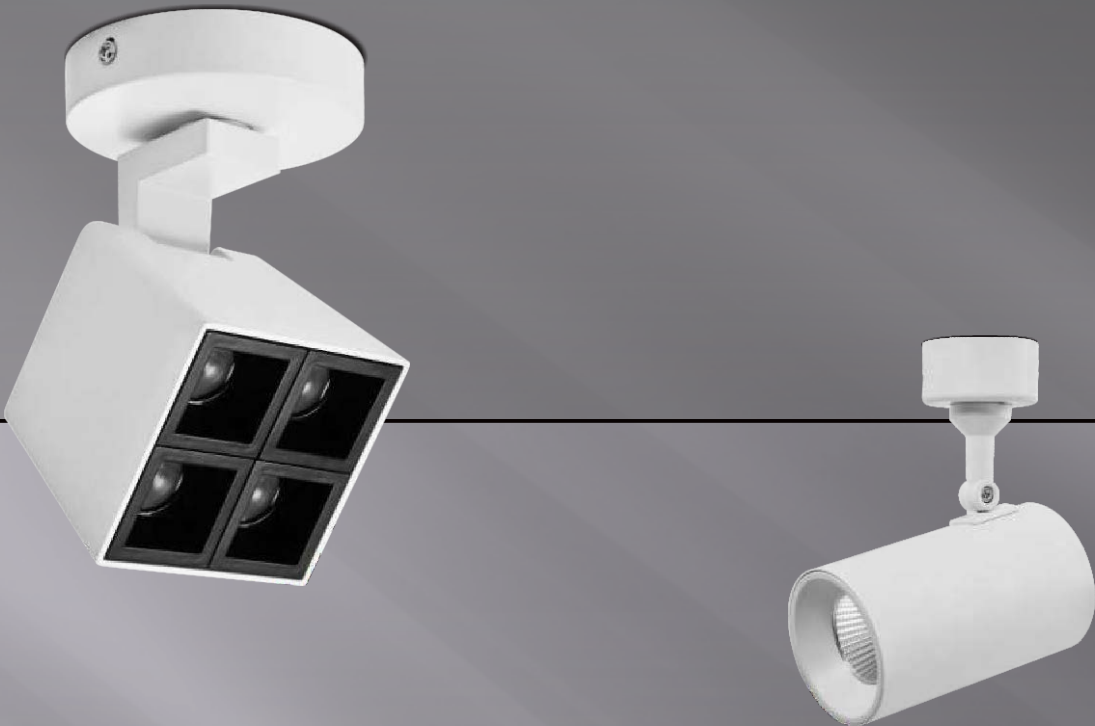

Simple and elegant designed LED pendant Light with aluminium die-cast housing, specially designed heatsink for good dissipation to minimize degradation of the lumens.
Application:household decorative lighting, shops, hotels bars, coffee shops.






FS3020-40
Max.40W


Operating Temp. : -30°C + 40°C
35W COB chip (DC1000mA)
■ 2700K/2815lm Ra90
■ 3000K/3120lm Ra90
■ 4000K/3520lm Ra80
■ 5000K/3925lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection




FS3025-18
Max.18W



Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA)
■ 2700K/1242lm Ra90
■ 3000K/1260lm Ra90
■ 4000K/1422lm Ra80
■ 5000K/1530lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection




FS4010B-18
Max.18W


Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA)
■ 2700K/1260lm Ra90
■ 3000K/1405lm Ra90
■ 4000K/1584lm Ra80
■ 5000K/1766lm Ra70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection





FS4027A-20


Max.20W

Operating Temp. : -30°C + 40°C 4×
(4.5W SMD) chip (DC1500mA)



- 2700K/1200lm Ra90
- 3000K/1300lm Ra90
- 4000K/1500lm Ra80
- 5000K/1710lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS4028A-30


Max.30W

Operating Temp. : -30°C + 40°C 6×
(4.5W SMD) chip (DC1500mA)



- 2700K/1800lm Ra90
- 3000K/1950lm Ra90
- 4000K/2242lm Ra80
- 5000K/2550lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection



FS4019A-30


Max.30W

Operating Temp. : -30°C + 40°C
26W COB chip (DC700mA)



- 2700K/2107lm Ra90
- 3000K/2340lm Ra90
- 4000K/2645lm Ra80
- 5000K/2943lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic

Beam angle



Color selection



FS4019A-20


Max.20W

Operating Temp. : -30°C + 40°C
17.5W COB chip (DC500mA)


- 2700K/1405lm Ra90
- 3000K/1600lm Ra90
- 4000K/1850lm Ra80
- 5000K/2100lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Triac

Beam angle



Color selection





FS4019A-15


Max.15W

Operating Temp. : -30°C + 40°C
13W COB chip (DC350mA)


- 2700K/1050lm Ra90
- 3000K/1200lm Ra90
- 4000K/1370lm Ra80
- 5000K/1550lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic

Beam angle



Color selection



FS4019A-10


Max.10W

Operating Temp. : -30°C + 40°C
8.5W COB chip (DC250mA)



- 2700K/700lm Ra90
- 3000K/800lm Ra90
- 4000K/930lm Ra80
- 5000K/1020lm Ra70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic

Beam angle



Color selection



FS4019A-06

Max.6W

Operating Temp. : -30°C + 40°C
5W COB chip (DC500mA)


- 2700K/420lm Ra90
- 3000K/470lm Ra90
- 4000K/540lm Ra80
- 5000K/605lm Ra70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic

Beam angle



Color selection





型号/Model	功率/P	高度/H	灯体长度/H1
FS4010D-12	Max.12W	143	108
FS4010D-18	Max.18W	163	128
FS4010D-22	Max.22W	173	138


Operating Temp. : -30°C + 40°C

16W COB chip (DC450mA) / FS4010D-18


- 2700K/1260lm Ra90
- 3000K/1405lm Ra90
- 4000K/1584lm Ra80
- 5000K/1766lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection



FS1069-06
Max.6W

Operating Temp. : -30°C + 40°C

5W COB chip (DC500mA)


- 2700K/350lm Ra90
- 3000K/430lm Ra90
- 4000K/500lm Ra80
- 5000K/510lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection








FS3029-09
Max.9W

Operating Temp. : -30°C + 40°C
7.5W COB chip (DC200mA)
2700K/630lm Ra90
3000K/702lm Ra90
4000K/783lm Ra80
5000K/864lm Ra70



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac



Model	P	H
FS3019-40	Max.40W	185
FS4010C-12	Max.12W	108
FS4010C-18	Max.18W	128
FS4010C-22	Max.22W	138

Operating Temp. : -30°C + 40°C
37W COB chip (DC1000mA) / FS3019- 40
2700K/2815lm Ra90
3000K/3120lm Ra90
4000K/3520lm Ra80
5000K/3925lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac




FS3024-18 / FS3024-25
Max.25W

Operating Temp. : -30°C + 40°C
16W COB chip (DC450mA) / FS3024-18
2700K/1242lm Ra90
3000K/1260lm Ra90
4000K/1422lm Ra80
5000K/1530lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable



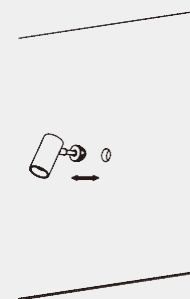

Recessed installation





Freely adjust of any lighting angle

Selected color



The installation diagram

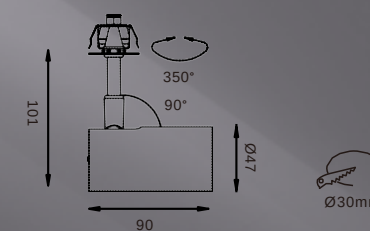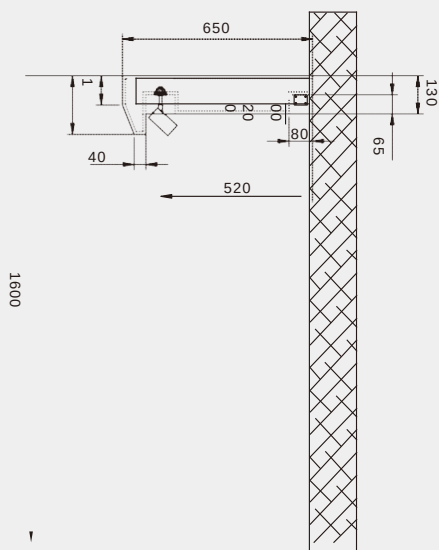

FS4016A-08

Max.8W

Operating Temp. : -30°C + 40°C

7W COB chip (120/230V)

■ 2700K/596lm Ra90

■ 3000K/620lm Ra90

■ 4000K/695lm Ra80


■ 5000K/735lm Ra70

Remote Driver: AC120/230V


Driver performance: Non-dimmable/dimmable

Dimmer: Triac

Beam angle




Color selection





LED CORNER LIGHT SERIES

MURALIS

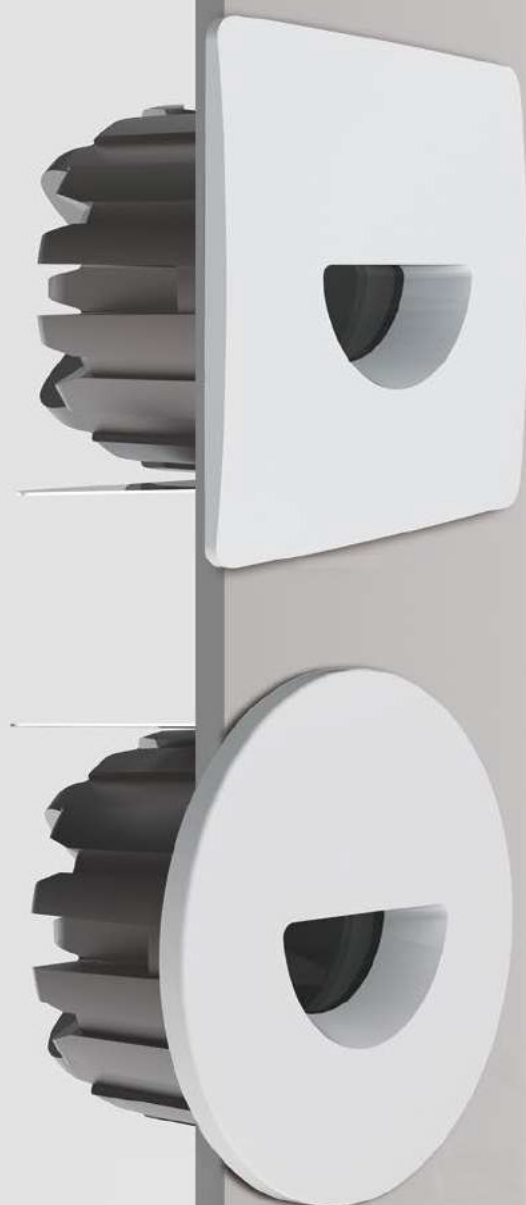

The shown LED light features a vertical aluminum shield, lamp head is delicately recessed at the wall, different light distribution available, like a thread of morning sunlight, very mysterious and romantic. It can be widely used in decoration of the building, stage, cultural places and so on.



LED CORNER LIGHT SERIES



FS5091-03

Max.3W

Operating Temp. : -30°C + 40°C

2W COB chip (DC500mA)

2700K/213lm	Ra80
3000K/234lm	Ra80
4000K/258lm	Ra80
5000K/291lm	Ra70


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac



Beam angle



Color selection



FS5092-03

Max.3W

Operating Temp. : -30°C + 40°C


2W COB chip (DC500mA)

2700K/213lm	Ra80
3000K/234lm	Ra80
4000K/258lm	Ra80
5000K/291lm	Ra70


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac



Beam angle



Color selection






FS5026-02
Max.3W

Operating Temp. : -30°C + 40°C
2W COB chip (DC500mA)
2700K/213lm Ra80
3000K/234lm Ra80
4000K/258lm Ra80
5000K/291lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac



Beam angle

Color selection


☒ B ☐ S ☐ W



FS5027-02
Max.3W

Operating Temp. : -30°C + 40°C
2W COB chip (DC500mA)
2700K/213lm Ra80
3000K/234lm Ra80
4000K/258lm Ra80
5000K/291lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac



Beam angle

Color selection


☒ B ☐ S ☐ W



FS5094-02 / FS5095-02
Max.3W

Operating Temp. : -30°C + 40°C
2.7W COB chip (DC500mA)
2700K/213lm Ra80
3000K/234lm Ra80
4000K/258lm Ra80
5000K/291lm Ra70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac



Color selection

☒ B ☐ S ☐ W






PLAFUS

LED WALL LAMP SERIES

High purity Alumun housing, simple and beautiful shape
Up & down both side light output
Applied to balcony, stair, corridor and bedroom



FS1068-20


Max.20W

Operating Temp. : -30°C + 40°C
18W COB chip (DC500mA)

- 2700K/1156lm Ra90
- 3000K/1450lm Ra90
- 4000K/1560lm Ra90
- 5000K/1660lm Ra90

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection



Note _____



A series of horizontal dashed lines for writing, spanning the width of the page.

