

LLG
76 Rue Duhesme, 75018 Paris
Tél : 09 83 54 88 83
E-mail : contact@llg-groupe.com
https://www.llg-groupe.com

V03

P.001-040 ····· LED Tracklight Series

P.041-056 ····· LED Mini Grille Light Series

P.057-078 ····· LED Linear Light Series/**Office**

P.079-142 ····· LED Ceiling Downlight Series

P.143-152 ····· Trimless Ceiling Downlight Series

P.153-159 ····· LED Modules Series

P.160-186 ····· LED Hotel Downlight Series

P.187-188 ····· LED Wall Wash Series

P.189-202 ····· LED Household Sotre & Recessed Grille Light Series

P.203-212 ····· LED Downlight Series

P.213-250 ····· LED Surface/Suspension Lamp Series

P.251-254 ····· LED Corner Light Series

P.255-278 ····· LED Wall Lamp Series

P.279-280 ····· LED Tube Light

LED Tracklight
MUSEIS


FS4028-30
P005


FS4027-20
P005


FS4033-05
P006


FS4029-30
P009


FS4029-20
P009


FS4037-30
P013


FS4037-20
P013


FS4037-15
P014


FS4032-30
P015


FS4019-30
P016


FS4019-20
P016


FS4019-15
P017


FS4019-10
P017


FS4019-06
P018



FS4005-42
P020


FS4005-35
P020


FS4005-30
P020


FS4006-42
P021


FS4006-35
P021


FS4006-30
P021


FS4010-22
P021


FS4010-18
P021


FS4010-12
P021


FS4010E-22
P022


FS4010E-18
P022


FS4010E-12
P022


FS4014-25
P023


FS4014-18
P023


FS4069A-06
P027


FS4015-25
P026


FS4015-18
P026


FS4020-20
P030


FS4050-35
P035


FS4050-30
P035


FS4050-15
P036


FS4050-07
P036


FS4045-35
P037


FS4045-24
P037


FS4045-10
P038


FS4046-40
P040

FS4046-20
P040

LED Mini Grille Light
MODULIS

FS8005-16
P043

FS8013-08
P047

FS8008-16
P047

FS8030-18
P049

FS8042-30
P050

FS8005D-45
P054

LED Linear Light Series/Office
LIGNIS
PANNELUM

FS8026-30
P059

FS800
P064

FS800
P066

FS801
P068

FS802
P069

FS803
P070

PANNELUM
P072

FS8037-20
P074

FS4049-30
P076

FS4049-15
P076

FS1004Z03
P078

LED Ceiling Downlight
EDONIS

FS2037-05
P081

FS1074-20
P084

FS1064-30
P087

FS1064-20
P088

FS1064-15
P088

FS5045-42
P091

FS5045-22
P092

FS5075A-09
P092

FS5088-20
P95

FS5086-20
P95

FS5086-15
P96

FS5088-15
P97

FS1014-15
P101

FS1013-09
P101

FS1012-05
P102

FS4034-18
P105

FS4034-12
P105

FS4034-06
P106

FS5071-18
P108

FS5073-18
P108

FS5070-30
P111

FS1060-42
P112

FS5042-22
P113

FS5103-09
P113

FS5072-25
P114

FS1083-06
P116

FS1083-13
P116

FS5201-05
P118

FS5040-05
P119

FS5040-02
P119

FS1076-02
P120

FS5053-05
P120

FS1061B-15
P122

FS5049-26
P125

FS5077-42
P128

FS5051-20
P129


LED Ceiling Downlight EDONIS


FS5052-20
P129


FS1083A-06
P132


FS1083-13
P132


FS5218-10
P133


FS5208-06
P133


FS5210-24
P139


FS5210-15
P139


FS5210-08
P140


FS5206-40
P142


FS5206A-40
P142

Trimless Ceiling Downlight EDONIS


FS5093-20
P147


FS5093-15
P147


FS5093-05
P148


FS5093A-20
P149


FS5093A-05
P149


FS5093A-15
P150


FS2039A-30
P150


FS5202-06
P152


FS5202-13
P152

LED Modules EDONIS


FS1059-09
P155


FS1059-15
P155

LED Hotel Down light EDONIS


FS6001-15
P160


FS6002-15
P160


FS6003-15
P161


FS6004-15
P161


FS5205-20
P165


FS5205-12
P165


FS5205-06
P166


FS6012A-20
P168


FS6012-20
P168


FS6013-50
P170


FS6200-30
P170


FS6010-42
P171


FS6006-42
P171


FS6007-42
P172


FS5207-20
P179


FS5207-15
P179


FS5207-08
P180


FS1090-05
P181

LED Hotel Down light EDONIS


FS1090-06
P181

FS1090A-05
P182

FS1090A-06
P182

FS1091-09
P183

FS1091A-09
P183

FS1092-09
P184

FS1092A-09
P184

FS1093-15
P185

FS1093A-15
P185

FS1094-15
P186

FS1094A-15
P186

LED Wall Wash EDONIS

FS1065-15
P187

LED Downlight EDONIS

FS1062-13
P191

FS1062-20
P192

FS1062-30
P192

FS2018A-35
P194

FS2019A-35
P194

FS2022A-15
P195

FS2023A-15
P196

FS2027A-13
P196

FS2029-16
P197

FS2030-30
P197

FS2027-13
P199

FS2039-30
P199

FS2040-15
P201

FS2040-30
P201

FS2041-15
P202

FS2041-30
P202

LED Downlight CIRCULIS

FS3033-20
P205

FS3032-15
P205

FS3031-10
P206

FS3002-24
P209

FS3001-19
P209

FS3022-15
P210

FS3021-13
P210

FS3020-10
P211

FS3023-07
P211

LED Suface/ Suspension Lamp APPLIS


FS3036-15
P213


FS3036-06
P213


FS3035-05
P214


FS4027C-20
P214


FS3020-40
P215


FS4010B-18
P215


FS3025-18
P218


FS4027A-20
P219


FS4028A-30
P219


FS4027D-20
P220


FS3038-20
P220


FS1078A-15
P221


FS3035A-05
P221


FS3036A-15
P222


FS3036A-06
P222


FS4019A-30
P223



FS4019A-20
P223


FS4019A-15
P224


FS4019A-10
P224


FS4019A-06
P225


FS4010D-22
P226


FS1069-06
P226


L05402-24
P228


L05402-24/S
P230


FS1001Z23
P233


FS1001Z22
P233


FS1001Z23
P234


FS1001Z12
P237


FS1001Z11
P238


FS3029-09
P241


FS3019-40
P241


FS3024-25
P242


FS4050A-35
P245


FS4050A-30
P245


FS4050A-15
P246


FS4050A-07
P246


FS3040-35
P247


FS3040-24
P247


FS3040-10
P248


FS3040A-35
P249

FS3040A-24
P249

FS3040A-10
P250

LED Corner Light MURALIS

FS5091-03
P252

FS5092-03
P252

FS5094-02
P253

LED Wall Lamp APPLIS

FS1078-30
P256

FS1080-06
P258

FS1082-30
P260

FS1068-20
P262

FS3004Z13-16
P264

FS3004Z03-16
P268

FS3002Z03-30
P273

FS3001Z01-10
P278

LED Tube Light TUBLIS

TUBLIS-2406-24
P279

TUBLIS-3612-36
P279

TUBLIS-4515-45
P280



Glare cut angle of 20 degree

90 degree Adjust up and down

355 degree Adjust Horizontal rotation









Selected color




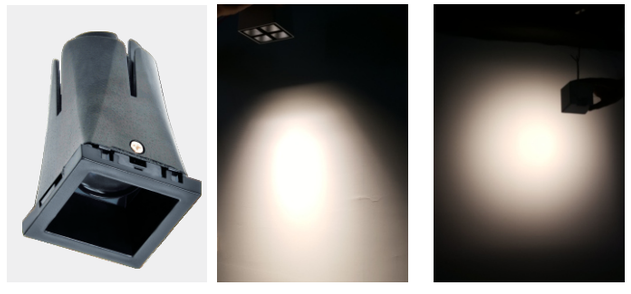


Simple and elegant designed led track light with aluminum die-cast housing, with multiple lens angles,specially designed heatsink with excellent dissipation to minimize degradation of the lumens. Application:fashion stores, chain store, shopping mall, showrooms, art galleries.

LED TRACK LIGHT SERIES

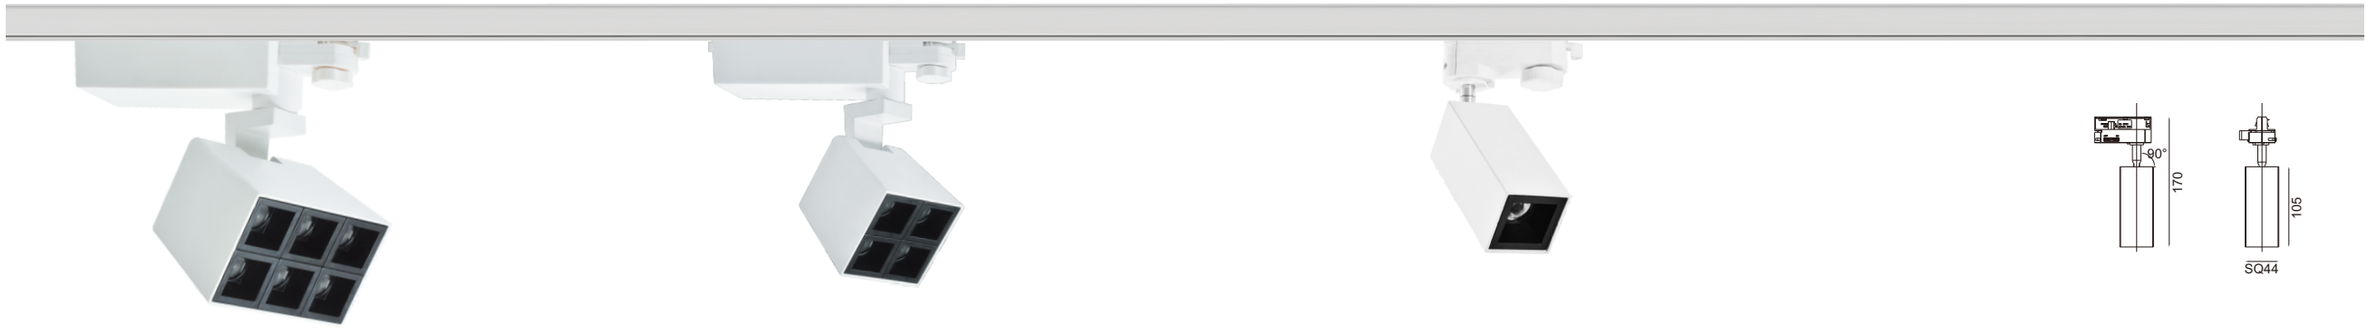





FS4033-05


Max.5W

Operating Temp. : -30℃ + 40℃

1× (4.5W SMD) chip (DC500mA)

- 2700K/300lm CRI90
- 3000K/325lm CRI90
- 4000K/375lm CRI80
- 5000K/425lm CRI70

Beam angle



Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Color selection

B | S | W

FS4028-30

Max.30W

Operating Temp. : -30℃ + 40℃

6× (4.5W SMD) chip (DC500mA)

- 2700K/1800lm CRI90
- 3000K/1950lm CRI90
- 4000K/2242lm CRI80
- 5000K/2550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

FS4027-20

Max.20W


Operating Temp. : -30℃ + 40℃

4× (4.5W SMD) chip (DC500mA)

- 2700K/1200lm CRI90
- 3000K/1300lm CRI90
- 4000K/1500lm CRI80
- 5000K/1710lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W







LED Tracklight with advance design of Global branded track driver system which integrated power supply and adpator, special heatsink design ensure the service life, excellent lens solution makes a clear light form.

CE CB COB Alu. IES IP40



Details of the figure

















FS4029-30

Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2100lm CRI90
- 3000K/2400lm CRI90
- 4000K/2760lm CRI80
- 5000K/3120lm CRI70

Remote Driver: AC220-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac


Beam angle



Color selection

B | S | W






FS4029-20

Max.20W

Operating Temp. : -30℃ + 40℃
18.5W COB chip (DC500mA)
- 2700K/1400lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70


Remote Driver: AC220-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection

B | S | W

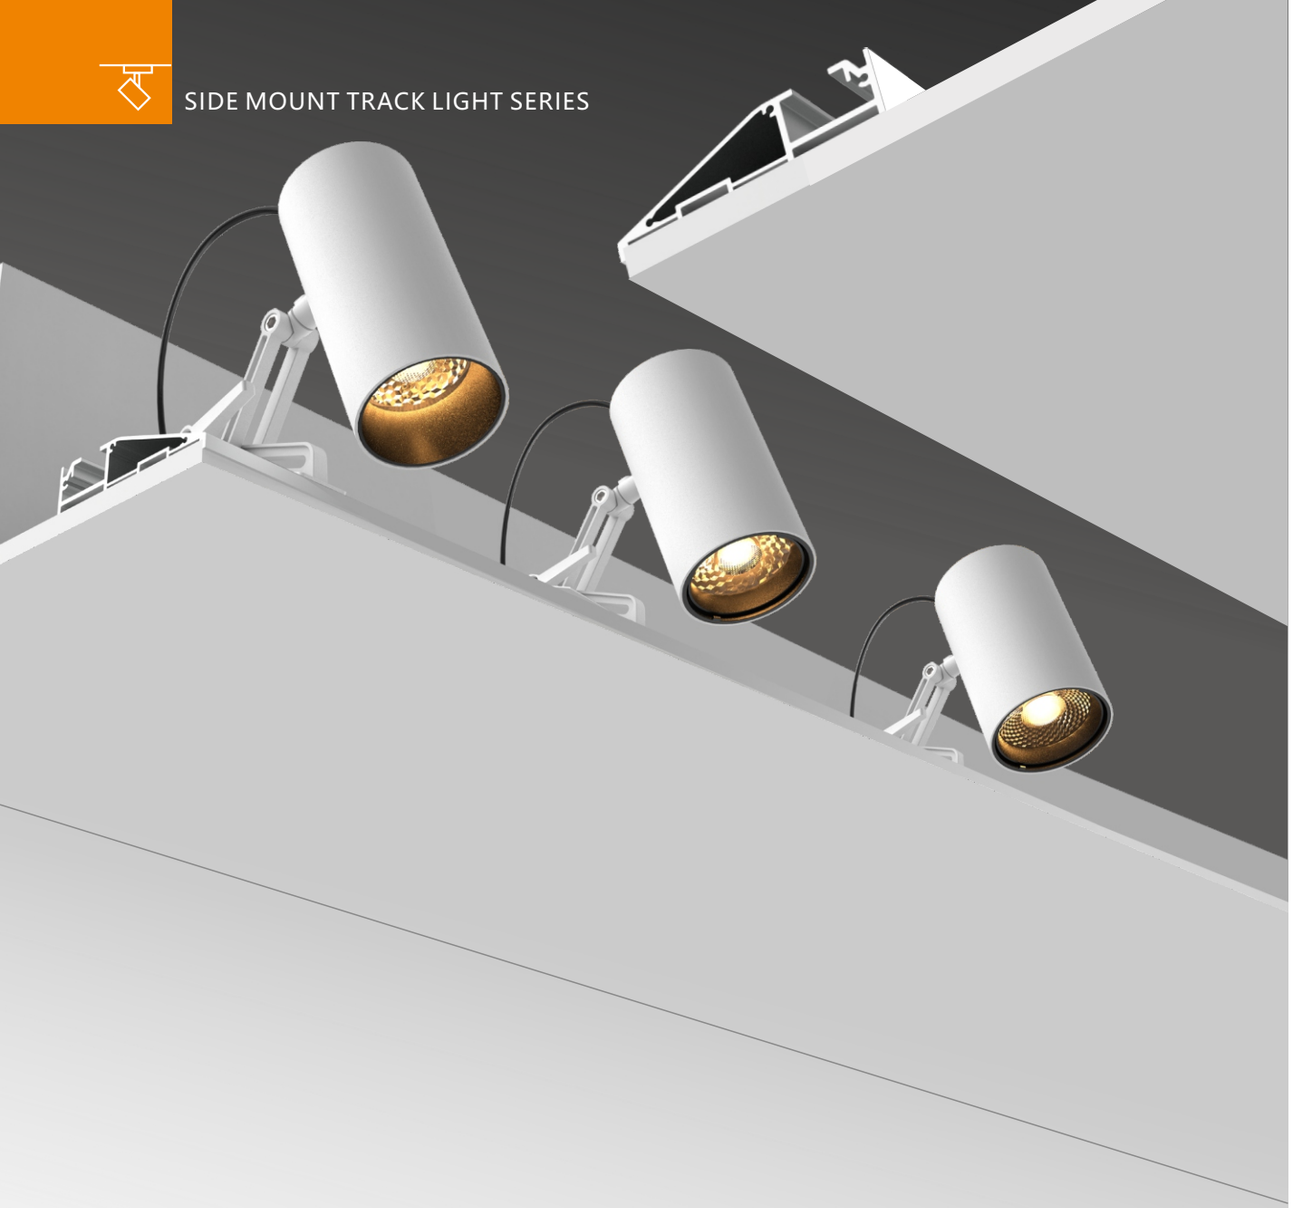


FS-D80A FS-D80B FS-D80C FS-D80D




Side Mounted Spot Tracklight :
High-end series of Spot lamps --specially designed for high-end locations, side mounted channel installed to make decoration simple and more stylish & extravagant, brands and luxury store designers' first choice of products





Side mounted ceilling installed details

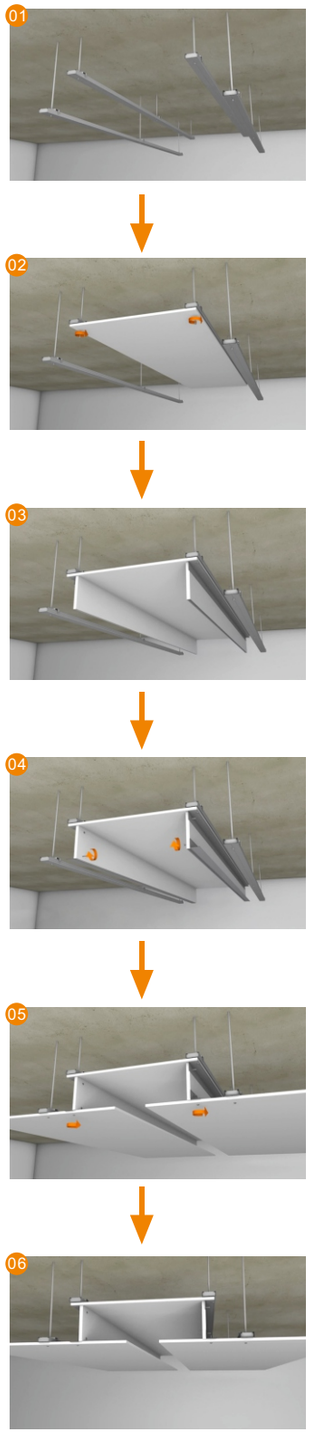



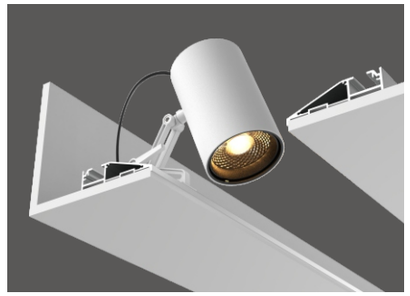






FS4037-30

Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2100lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70


Remote Driver: AC220-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle




Color selection

B | S | W

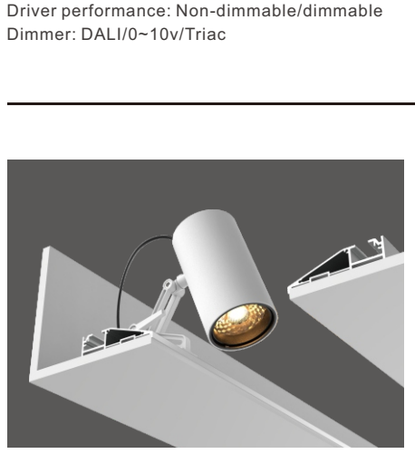






FS4037-20

Max.20W

Operating Temp. : -30℃ + 40℃
18.5W COB chip (DC500mA)
- 2700K/1400lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70


Remote Driver: AC220-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle




Color selection

B | S | W

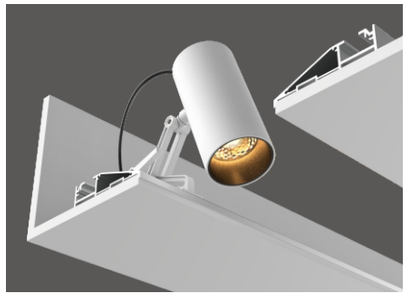






FS4037-15

Max.15W

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1390lm CRI80
- 5000K/1580lm CRI70

Remote Driver: AC220-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W



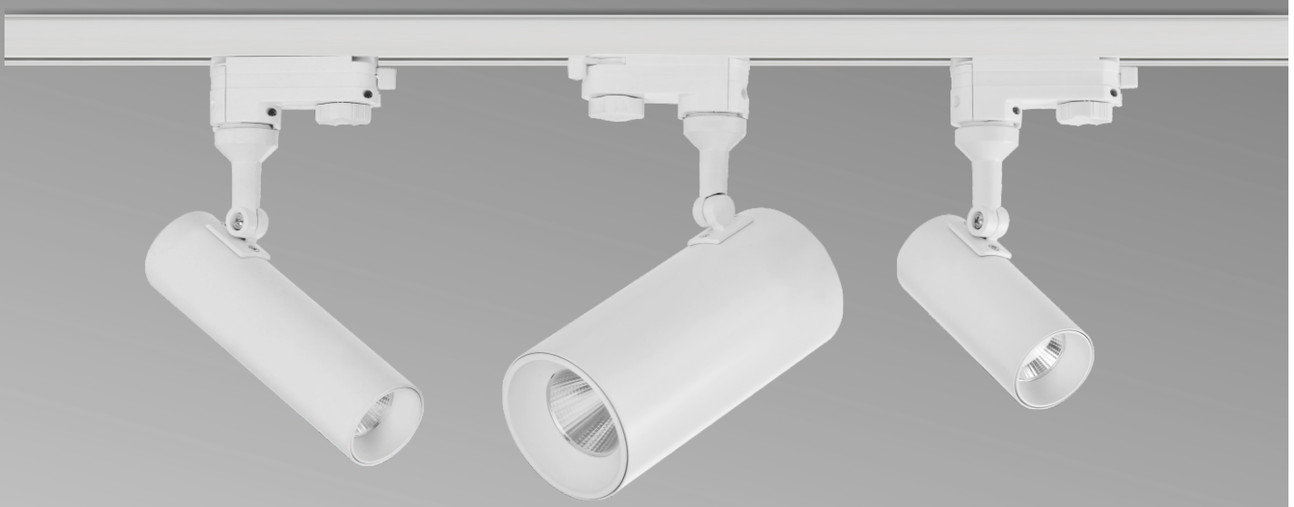




FS4019 **FS4032-15/22/30**



CE CB COB Alu. IES IP40






FS4019-30

Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2107lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic


Beam angle



Color selection

B | S | W






FS4019-20

Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1405lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic


Beam angle



Color selection

B | S | W






FS4019-15

Max.15W

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic

Beam angle



Color selection




FS4019-10

Max.10W

Operating Temp. : -30℃ + 40℃
8.5W COB chip (DC250mA)
- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI80
- 5000K/1020lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic

Beam angle




Color selection










FS4019-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Traic

Beam angle



Color selection






Simple and elegant designed led track light with aluminum die-cast housing, with multiple reflecting angles,specially designed heatsink with excellent dissipation to minimize degradation of the lumens.
Application:fashion stores, chain store, shopping mall, showrooms, art galleries.










Model	P	H
FS4005-30	Max.30W	152
FS4005-35	Max.35W	142
FS4005-42	Max.42W	167

Operating Temp. : -30℃ +40℃
38W COB chip (DC1000mA) / FS4005-42
- 2700K/2958lm CRI90
- 3000K/3360lm CRI90
- 4000K/3696lm CRI80
- 5000K/4116lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W







Model	P	H
FS4006-30	Max.30W	152
FS4006-35	Max.35W	142
FS4006-42	Max.42W	167

Operating Temp. : -30℃ + 40℃
38W COB chip (DC1000mA) / FS4006-42
- 2700K/2958lm CRI90
- 3000K/3360lm CRI90
- 4000K/3696lm CRI80
- 5000K/4116lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection







Model	P	H	H1
FS4010-12	Max.12W	178	108
FS4010-18	Max.18W	205	128
FS4010-22	Max.22W	213	138

Operating Temp. : -30℃ + 40℃
16W COB chip (DC450mA) / FS4010-18
- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection







Model	P	H	H1
FS4010E-12	Max.12W	278	108
FS4010E-18	Max.18W	298	128
FS4010E-22	Max.22W	308	138

Operating Temp. : -30℃ + 40℃
10W COB chip (DC300mA) / FS4010E-12
- 2700K/828lm CRI90
- 3000K/850lm CRI90
- 4000K/1020lm CRI80
- 5000K/1056lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

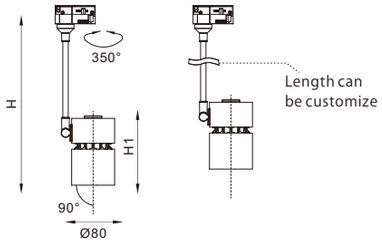

Beam angle




Color selection









Model	P	H
FS4014-18	Max.18W	262
FS4014-25	Max.25W	262

Operating Temp. : -30℃ +40℃

16W COB chip (DC450mA) / FS4014-18


- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: DALI/0~10v/Triac

Beam angle



Color selection


B | S | W

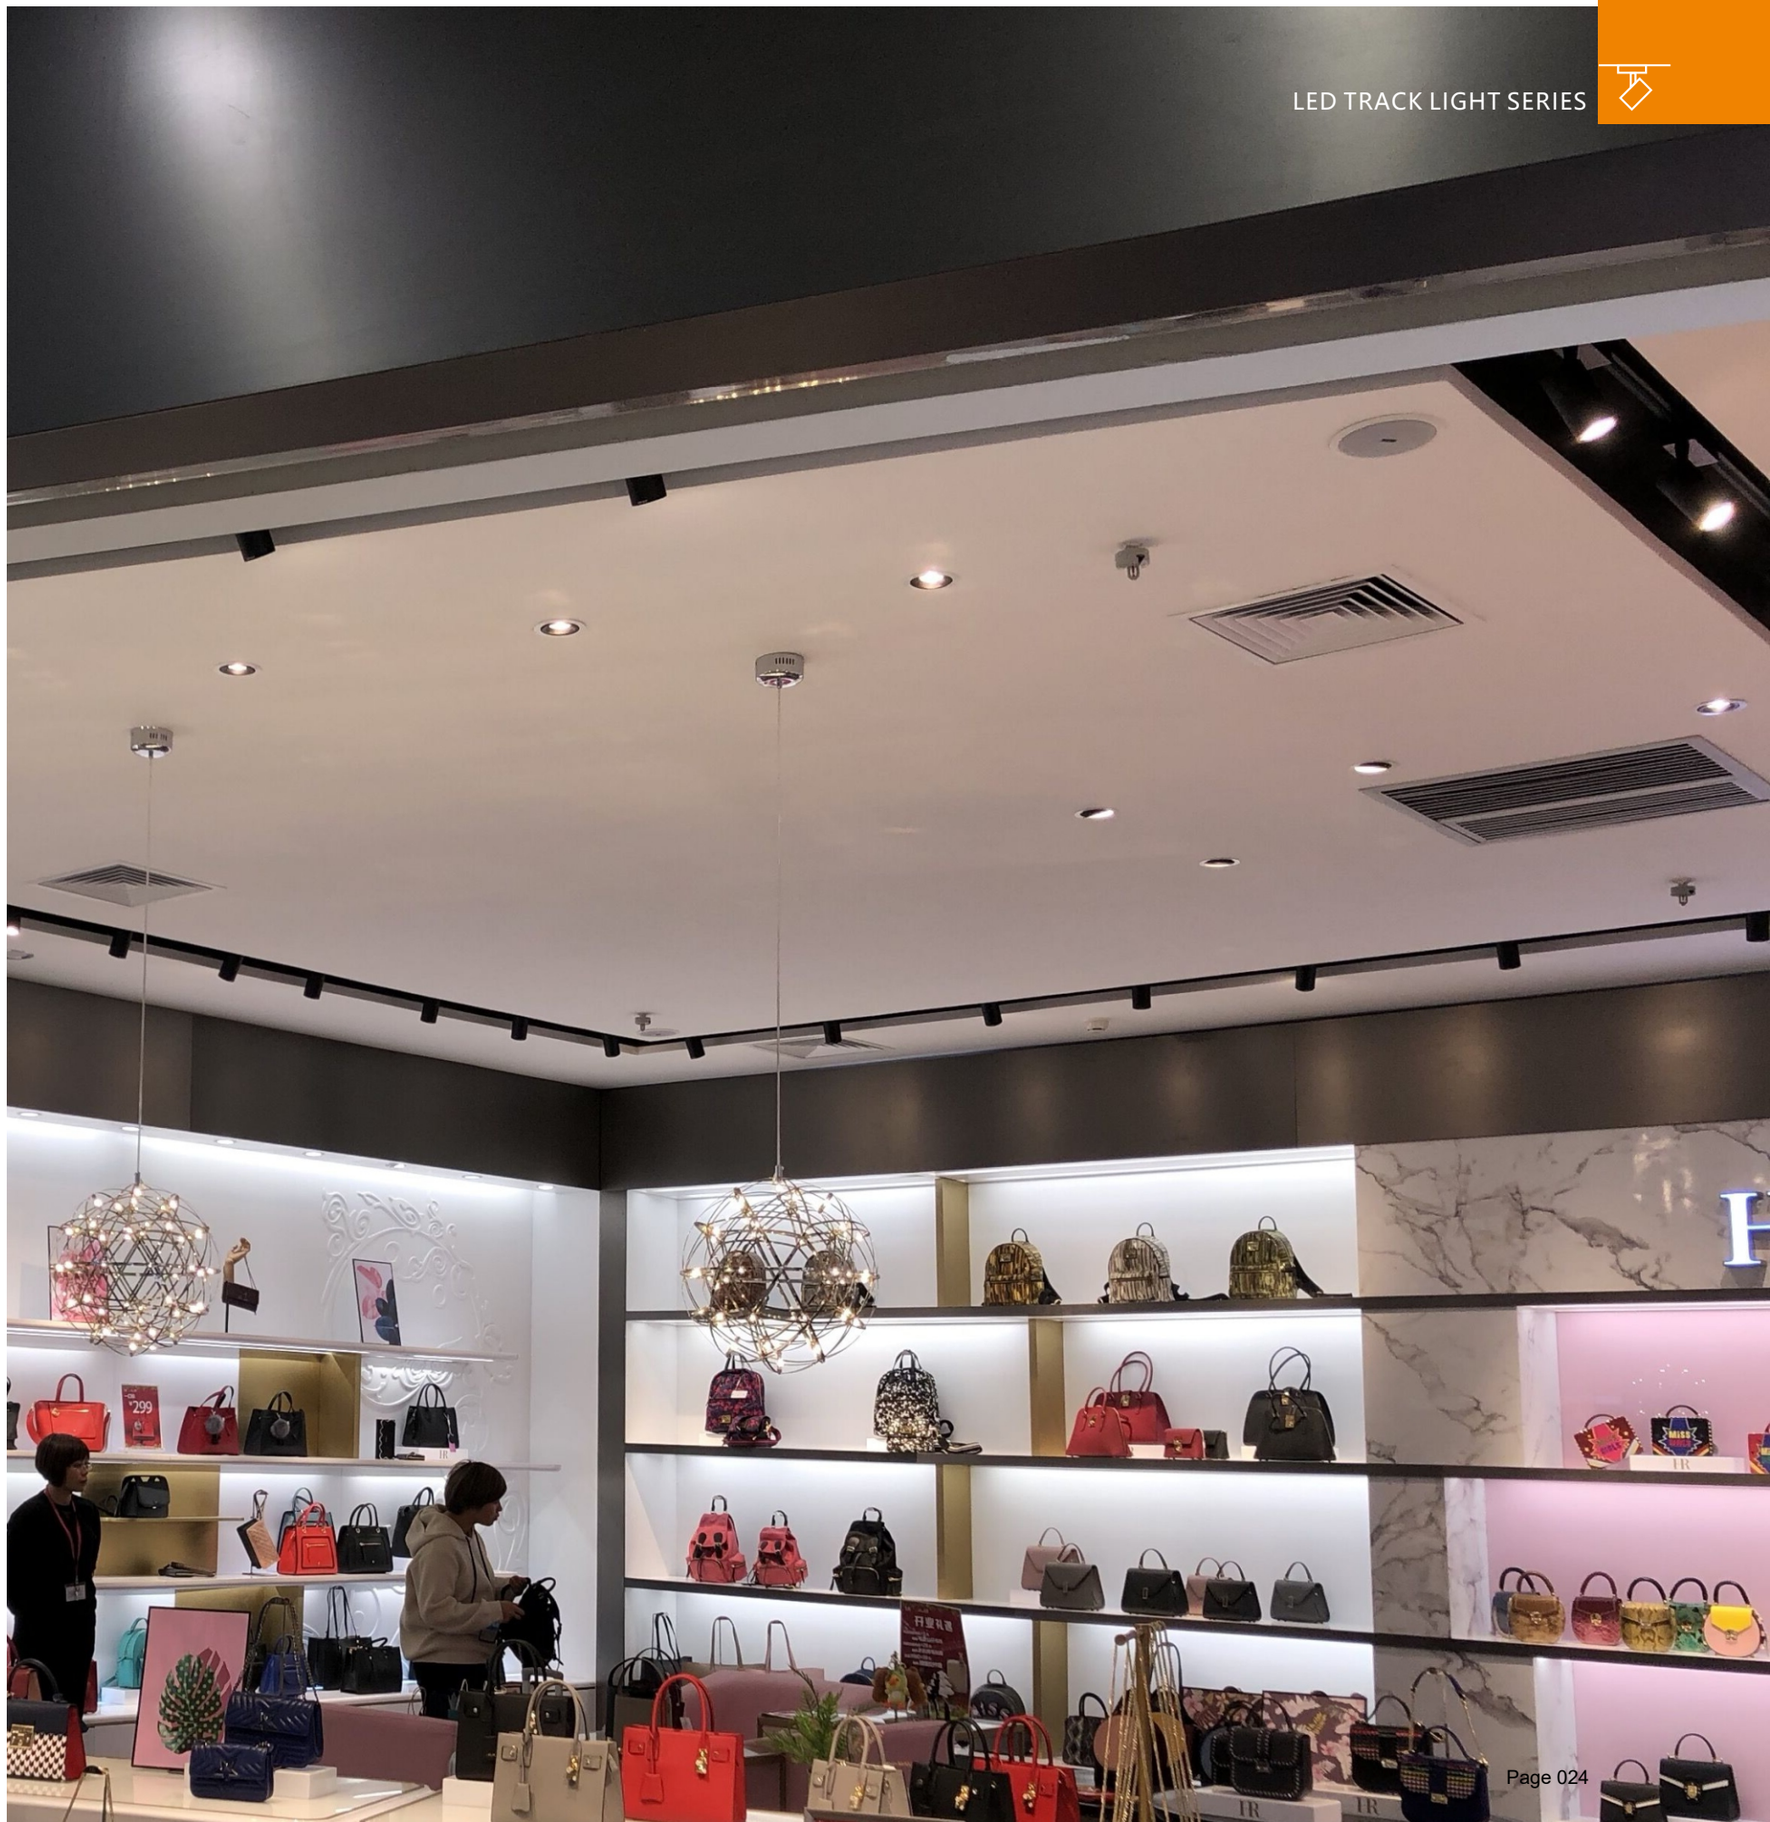









FS4015-18 / FS4015-25

Max.18W/25W

Operating Temp. : -30℃ + 40℃

16W COB chip (DC450mA) / FS4015-18


- 2700K/1242lm CRI90
- 3000K/1296lm CRI90
- 4000K/1500lm CRI80
- 5000K/1550lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: DALI/0-10V/Traic

Beam angle



Color selection


B | S | W

▶ Selected color

CE CB COB Alu. IES IP40








FS1069A-06
Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac



Beam angle




Color selection

B | S | W



LED TRACK LIGHT SERIES



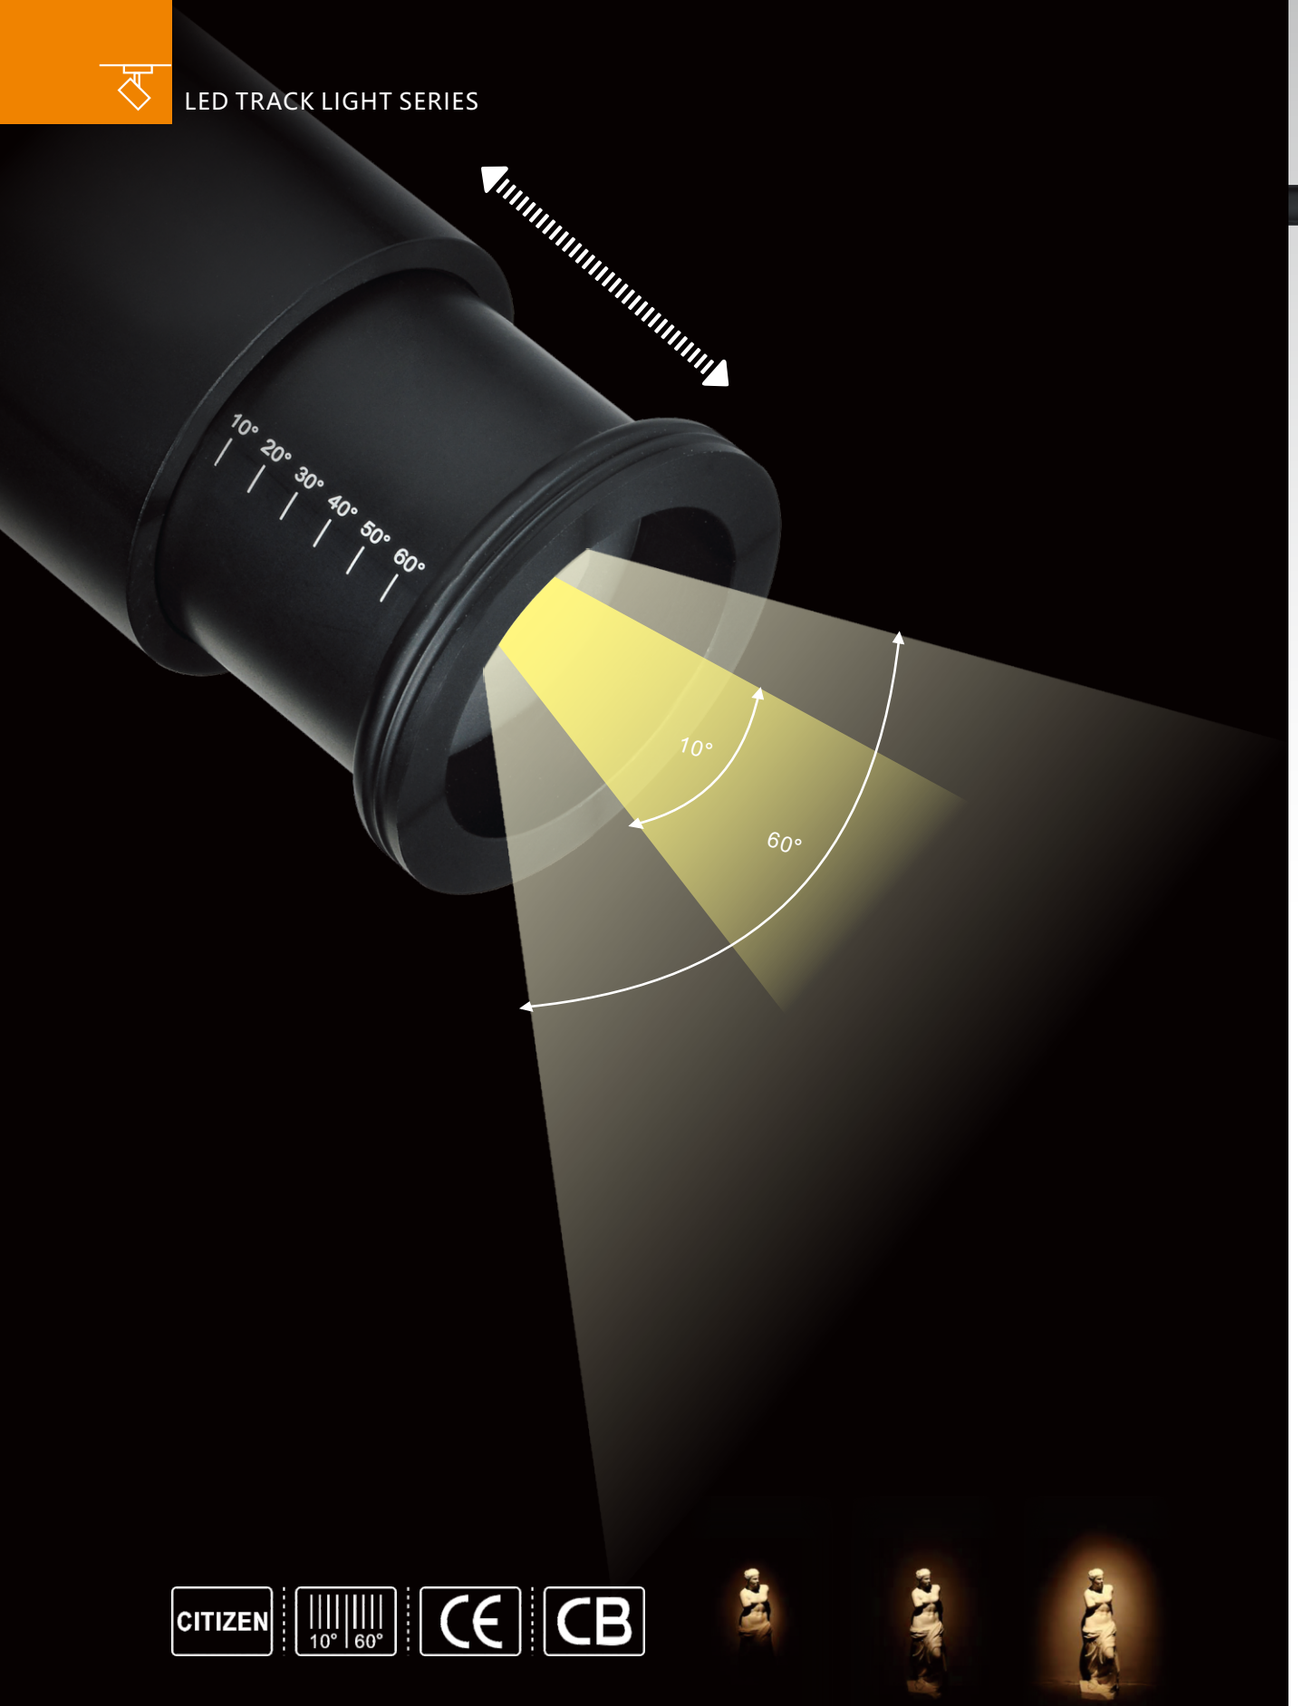

CITIZEN | 10° 60° | CE | CB



F4020-20


Max.20W

Operating Temp. : -30℃ +40℃
18W COB chip (DC500mA)
- 2700K/1300lm CRI90
- 3000K/1400lm CRI90
- 4000K/1850lm CRI90

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer:Dali/ 0-10V/Traic

Beam angle





Color selection

B | S | W

CE | CB | COB | Alu. | IES | IP40

Scenario
Exhibition tubes, hallways

LED
TRACK LIGHT
SERIES

Simple and elegant designed led track light with hight quality aluminum body, with multiple reflecting angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.


Application: fashion stores, chain store, shopping mall, showrooms, art galleries.



90 degree Adjust up and down

355 degree Adjust Horizontal rotation

Glare cut angle of 20 degree

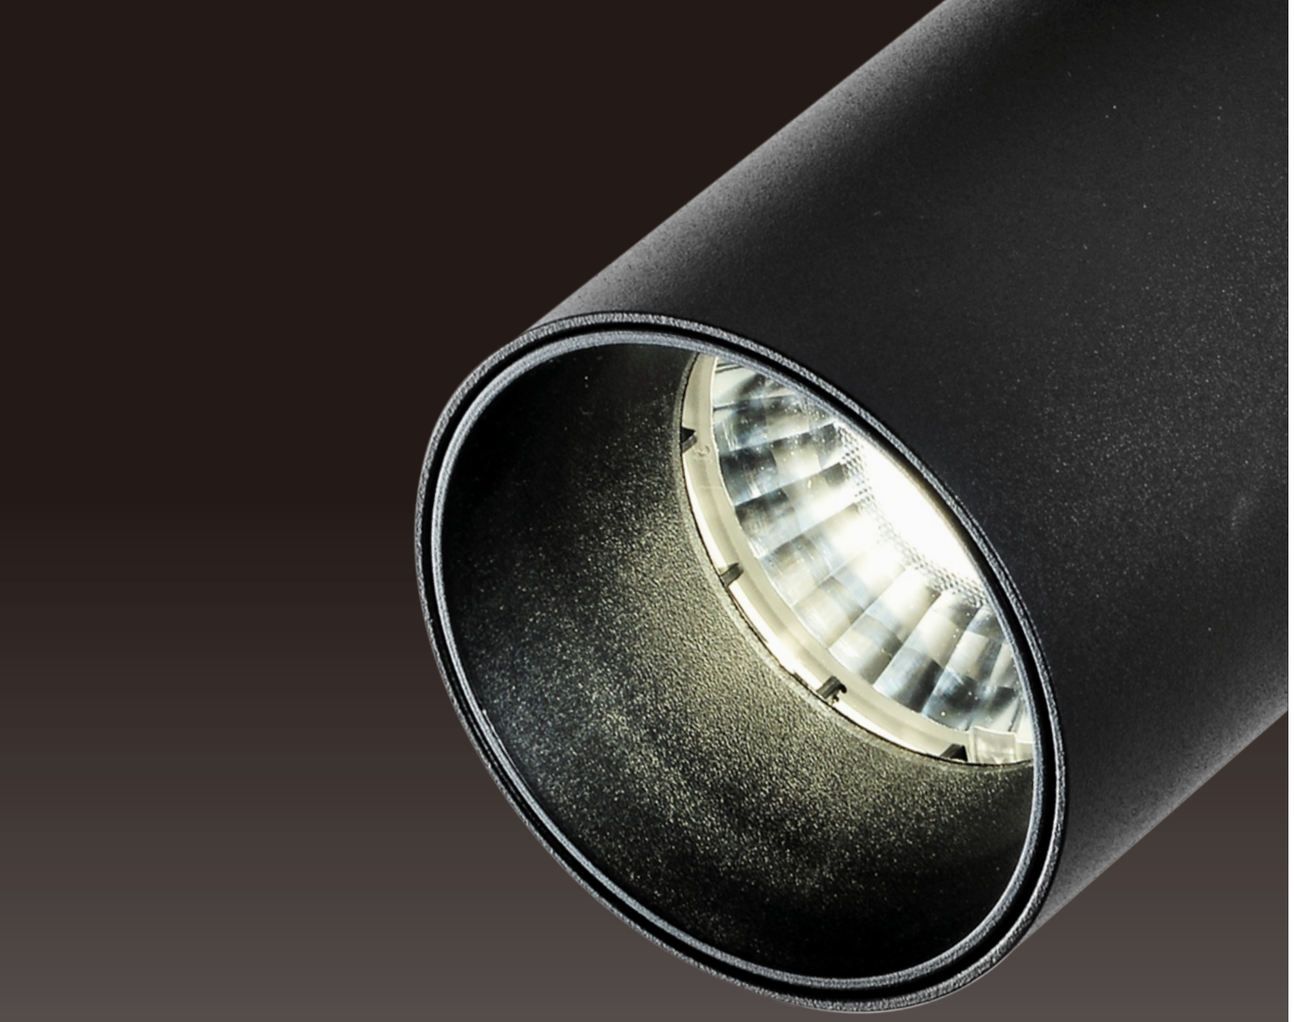



FS4050

Simple and elegant designed led track light with hight quality aluminum body, with multiple reflecting angles, specially designed heatsink with excellent dissipation to minimize degradation of the lumens.

Application: fashion stores, chain store, shopping mall, showrooms, art galleries.



Selected reflector



FS4045

STRUCTURE CHARACTERISTICS

\+ Symmetric optics



General Lighting




Reflector color option



\+ Asymmetric optics

LLG-contact@llg-groupe.com - www.llg-groupe.com




Wall washer



FS4050
SERIES

Color selection
B S W




FS4050-35
Max.36W

Operating Temp. : -30°C ＋ 40°C
32W COB chip (DC850mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3100lm CRI90
- 5000K/3400lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle








FS4050-30
Max.30W

Operating Temp. : -30°C ＋ 40°C
26W COB chip (DC600mA)
- 2700K/2107lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI90
- 5000K/2943lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle





FS4050
SERIES

Color selection
B S W




FS4050-15
Max.15W

Operating Temp. : -30°C ＋ 40°C
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1390lm CRI90
- 5000K/1580lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle








FS4050-07
Max.7W

Operating Temp. : -30°C ＋ 40°C
5W COB chip (DC150mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle





FS4045
SERIES

Color selection
B S W



Reflector color option




FS4045-35
Max.35W

Operating Temp. : -30°C ＋ 40°C
32W COB chip (DC850mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3080lm CRI90
- 5000K/3360lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle







Reflector color option




FS4045-24
Max.24W

Operating Temp. : -30°C ＋ 40°C
24W COB chip (DC600mA)
- 2700K/1750lm CRI90
- 3000K/1950lm CRI90
- 4000K/2200lm CRI90
- 5000K/2340lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle





CE CB COB Alu. IES IP40

FS4045
SERIES

Color selection
B S W



Reflector color option




FS4045-10
Max.10W

Operating Temp. : -30°C ＋ 40°C
10W COB chip (DC250mA)
- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI90
- 5000K/1020lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Beam angle





CE CB COB Alu. IES IP40



Color selection

B S W

FS4046-40

Max.40W


Operating Temp. : -30°C ~ 40°C
40W COB chip (DC1000mA)

- 2700K/3000lm CRI90
- 3000K/3200lm CRI90
- 4000K/3280lm CRI90
- 5000K/3400lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle





FS4046-20


Max.20W


Operating Temp. : -30°C ~ 40°C
20W COB chip (DC500mA)

- 2700K/1500lm CRI90
- 3000K/1600lm CRI90
- 4000K/1640lm CRI90
- 5000K/1700lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle





LED MINI GRILLE LIGHT SERIES

LED Wallwasher linear light with Finland Ledil top quality lens.
High thermal conductive aluminum body Metal black surface coating, free adjusted Perfect wash wall effect, is the first choice of lighting designers








FS8005-16 / 6*2.1W LED / 960lm / 2700K / Ra80





FS8006-30 / 12*2.1W LED / 1800lm / 2700K / Ra80




FS8007-45 / 18*2.1W LED / 3000lm / 2700K / Ra80



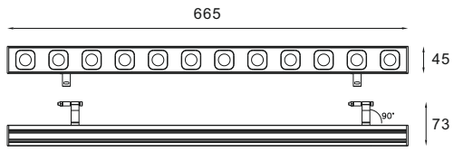

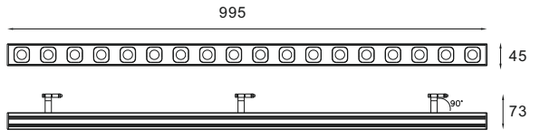

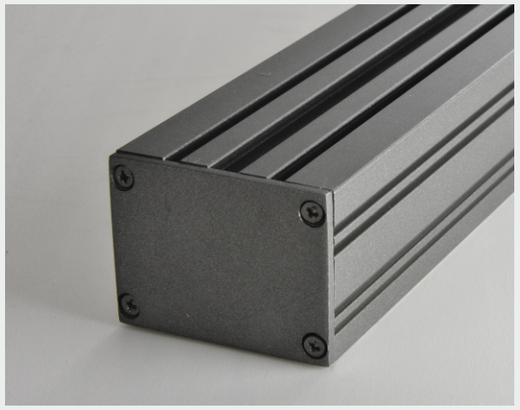



Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable

Dimmer: 0-10V/Triac/Dali

Surface mounted, can easily adjust any angel , Meet the lighting requirements of all directions

Beam angle:



Color selection

B | S | W





*Base on the Surface mounted version, we increase trimless,recessed and Grille version to meet differenct place installation requirement
*Excep wallwasher funtion it can also instead of the downlight lighting
*Apply in Museum,Hotel clubs, shopping malls, coffee shop,ect.

LED MINI GRILLE LIGHT SERIES

INDOOR · **WALL WASH**



FS8013-03 / 1*2.1W LED / 207lm / 2700K / Ra80



FS8013-05 / 2*2.1W LED / 414lm / 2700K / Ra80



FS8013-08 / 3*2.1W LED / 552lm / 2700K / Ra80




FS8008-16 / 6*2.1W LED / 1104lm / 2700K / Ra80




FS8009-30 / 12*2.1W LED / 2070lm / 2700K / Ra80



FS8010-45 / 18*2.1W LED / 3400lm / 2700K / Ra80

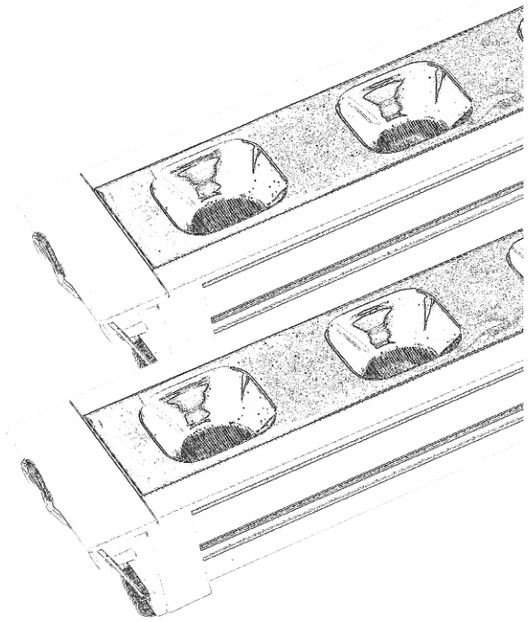

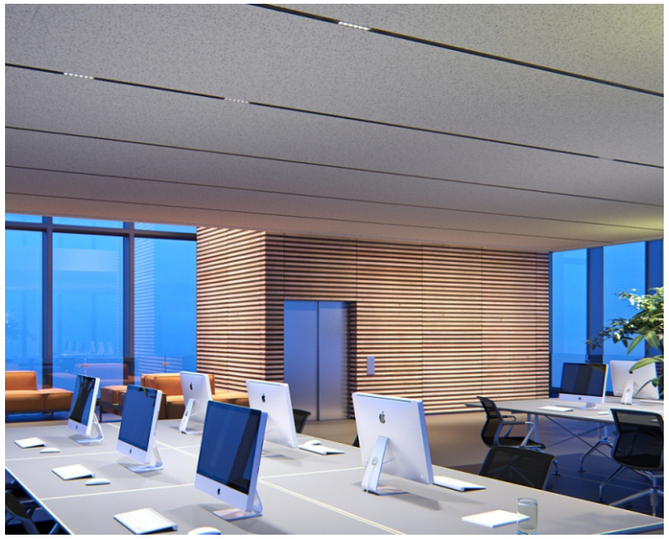


Remote Driver: AC100-240V 50/60Hz

Driver performance: Non-dimmable/dimmable


Dimmer: 0-10V/Triac/Dali


Beam angle:





Color selection


B | S | W








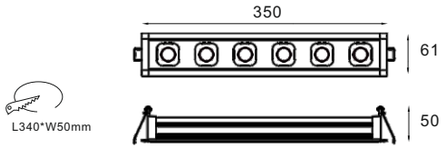

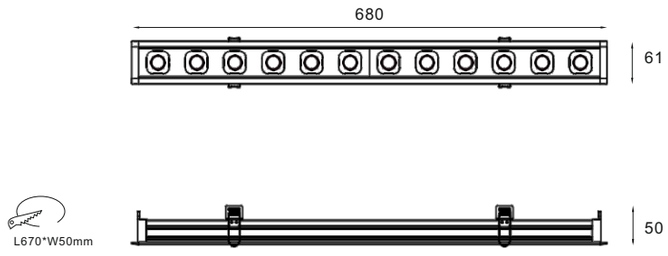


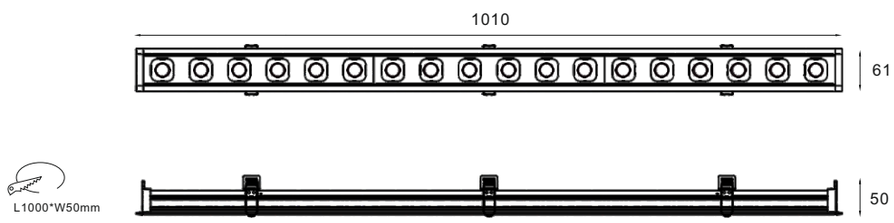






LEDIL LENS



TENSILE PMMA

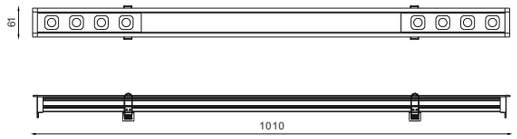




L1000*W50mm

FS8030-18
Max.18W

Operating Temp. : -30℃ + 40℃
8×1W (CREE XPE)+136pcs SMD 2835 /Input:300mA.53v
SMD part lumen
- 2700K/560lm CRI90
- 3000K/630lm CRI90
- 4000K/720lm CRI80
- 5000K/810lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

CREE LED chip part:
Beam angle:




Color selection

B | S | W



The Second Generation led linear light with better anti-glare effect.
UGR < 14. reflector holder have different color options

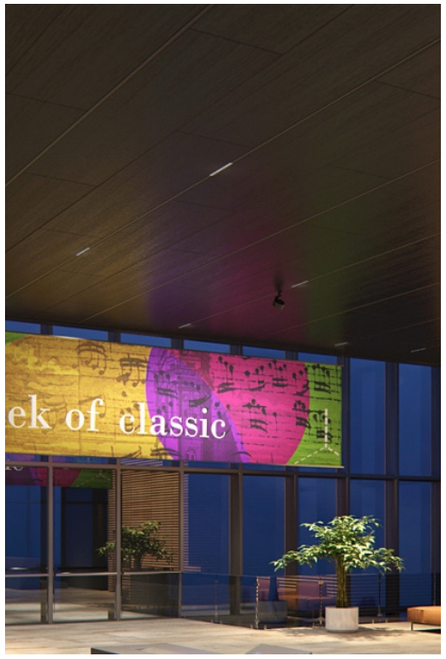



FS8042-30 / 15*2W LED / 2100lm / 2700K / Ra80




FS8042-20 / 10*2W LED / 1400lm / 2700K / Ra80





FS8042-10 / 5*2W LED / 690lm / 2700K / Ra80


Selected color




Product size:

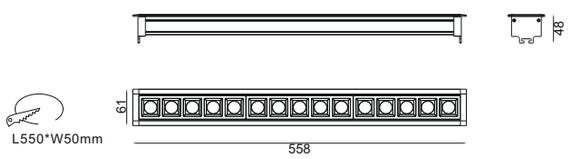

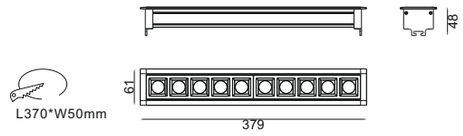




Beam angle:




LED MINI GRILLE LIGHT SERIES

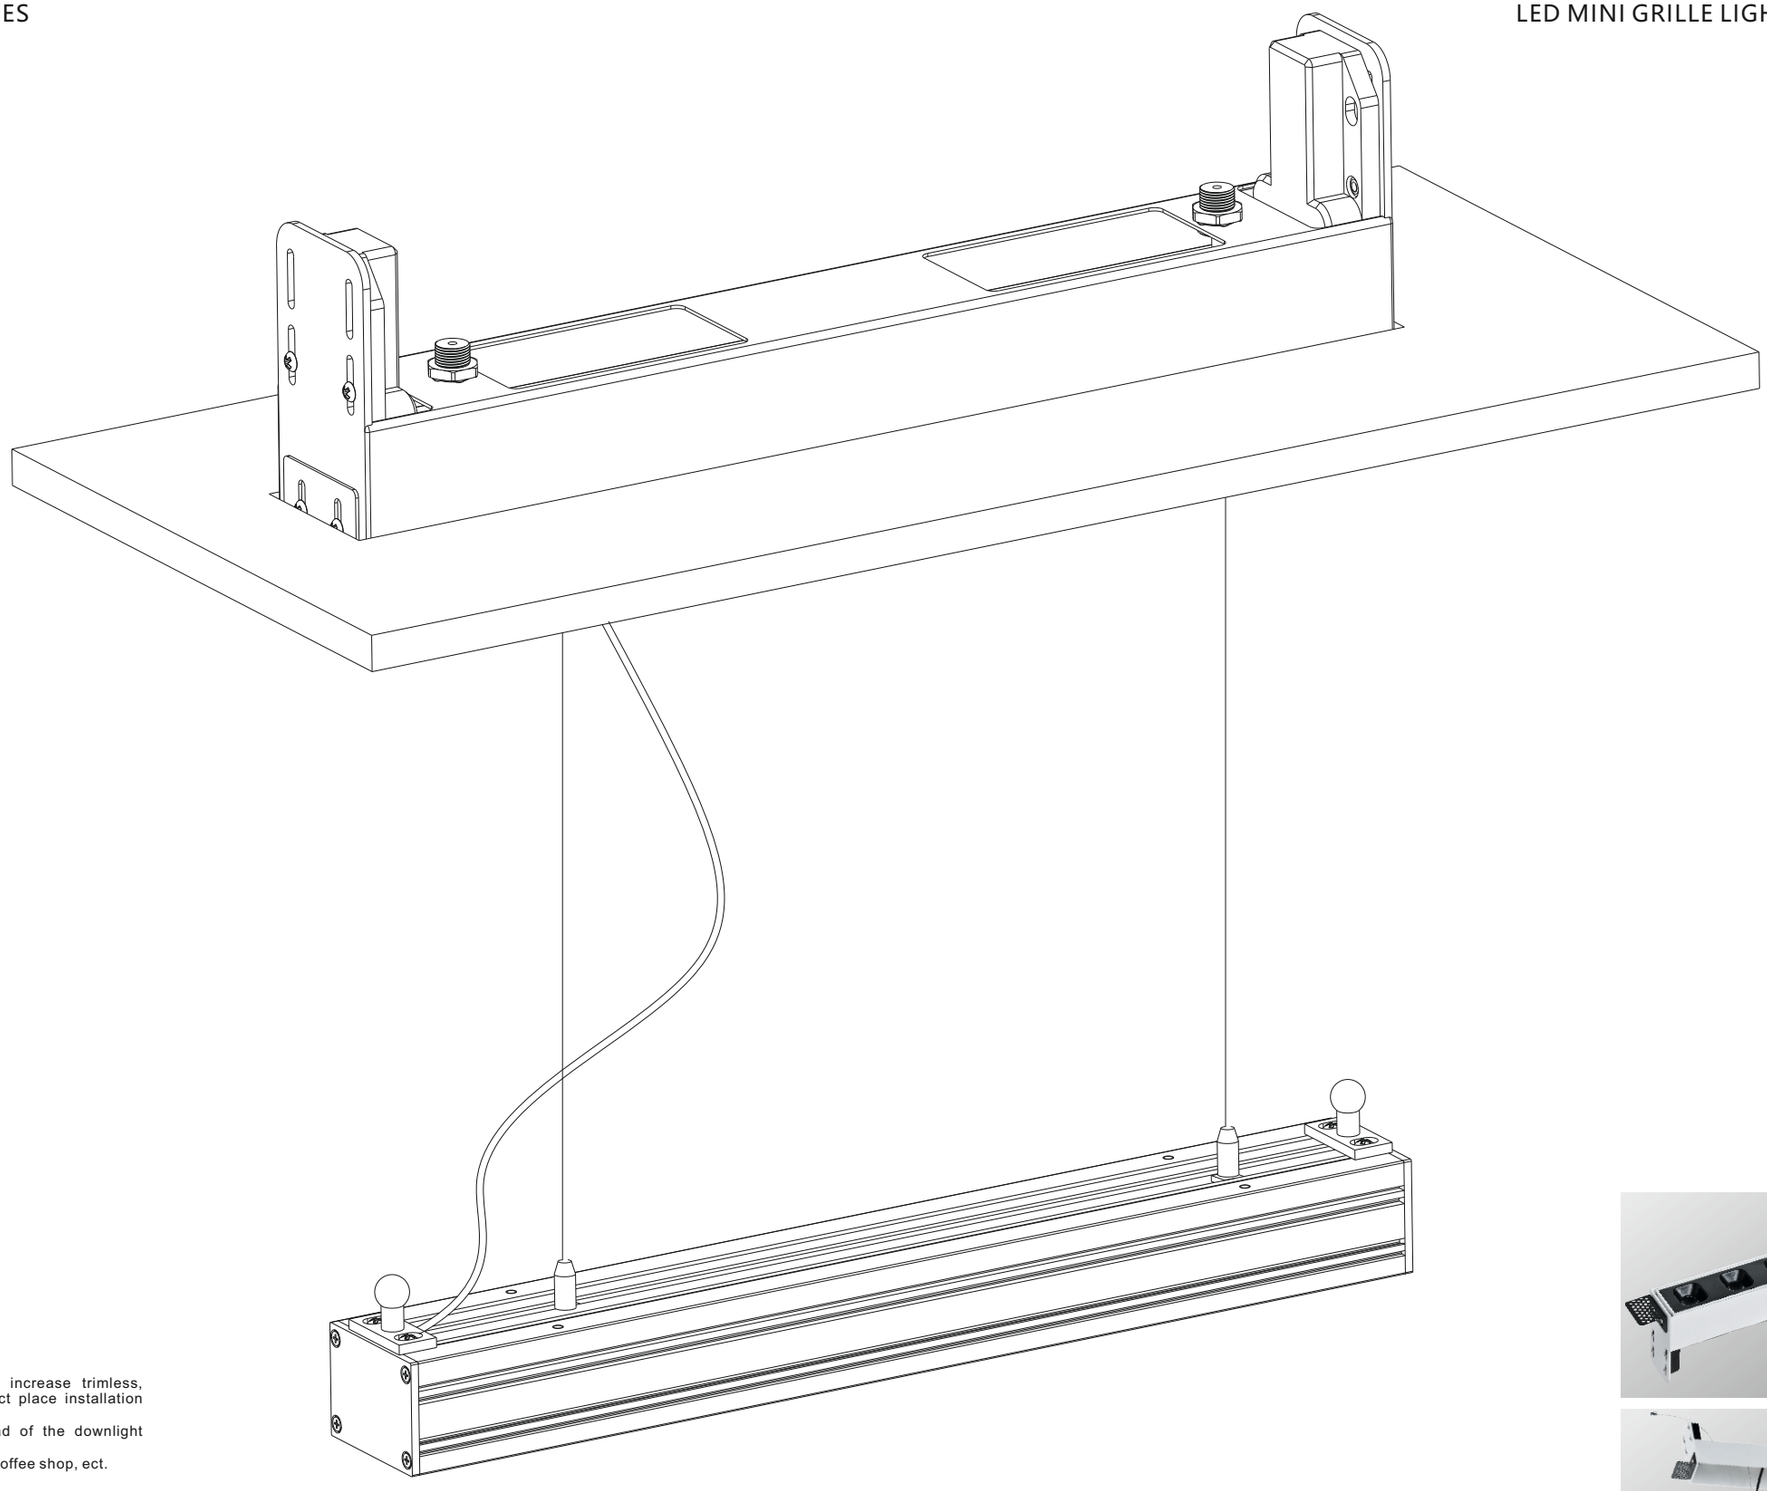


* Base on the Surface mounted version, we increase trimless, recessed and Grille version to meet differenct place installation requirement.
* Excep wallwasher funtion it can also instead of the downlight lighting.
* Apply in Museum,Hotel clubs, shopping malls, coffee shop, ect.



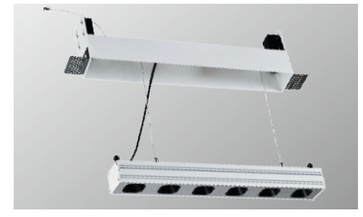









Installation steps

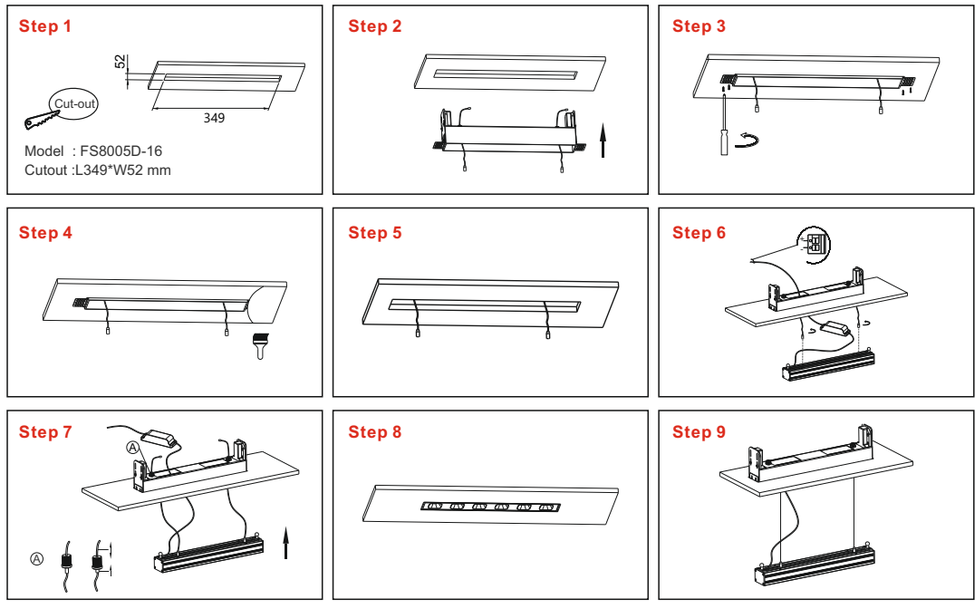


Standard length:344/674/1056mm(details refer to left drawing),
Length can be customize by jointing.
Cutout: Width 52mm, Length refer to what selected


FS8005D-16

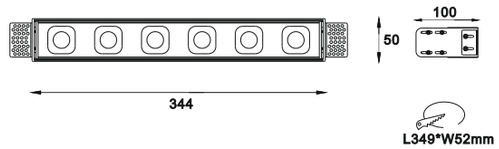

FS8005D-30

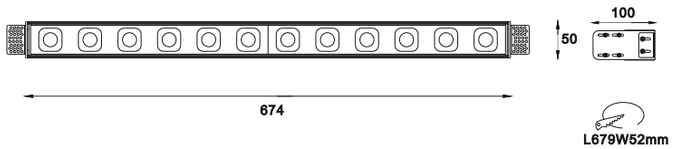


FS8005D-45

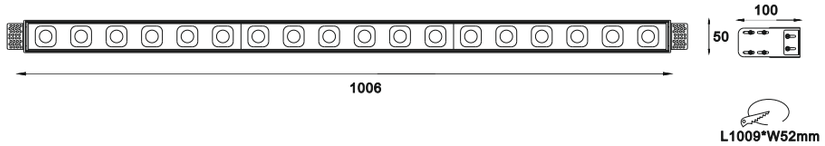



MULTIPLE INSTALLATION SERIES



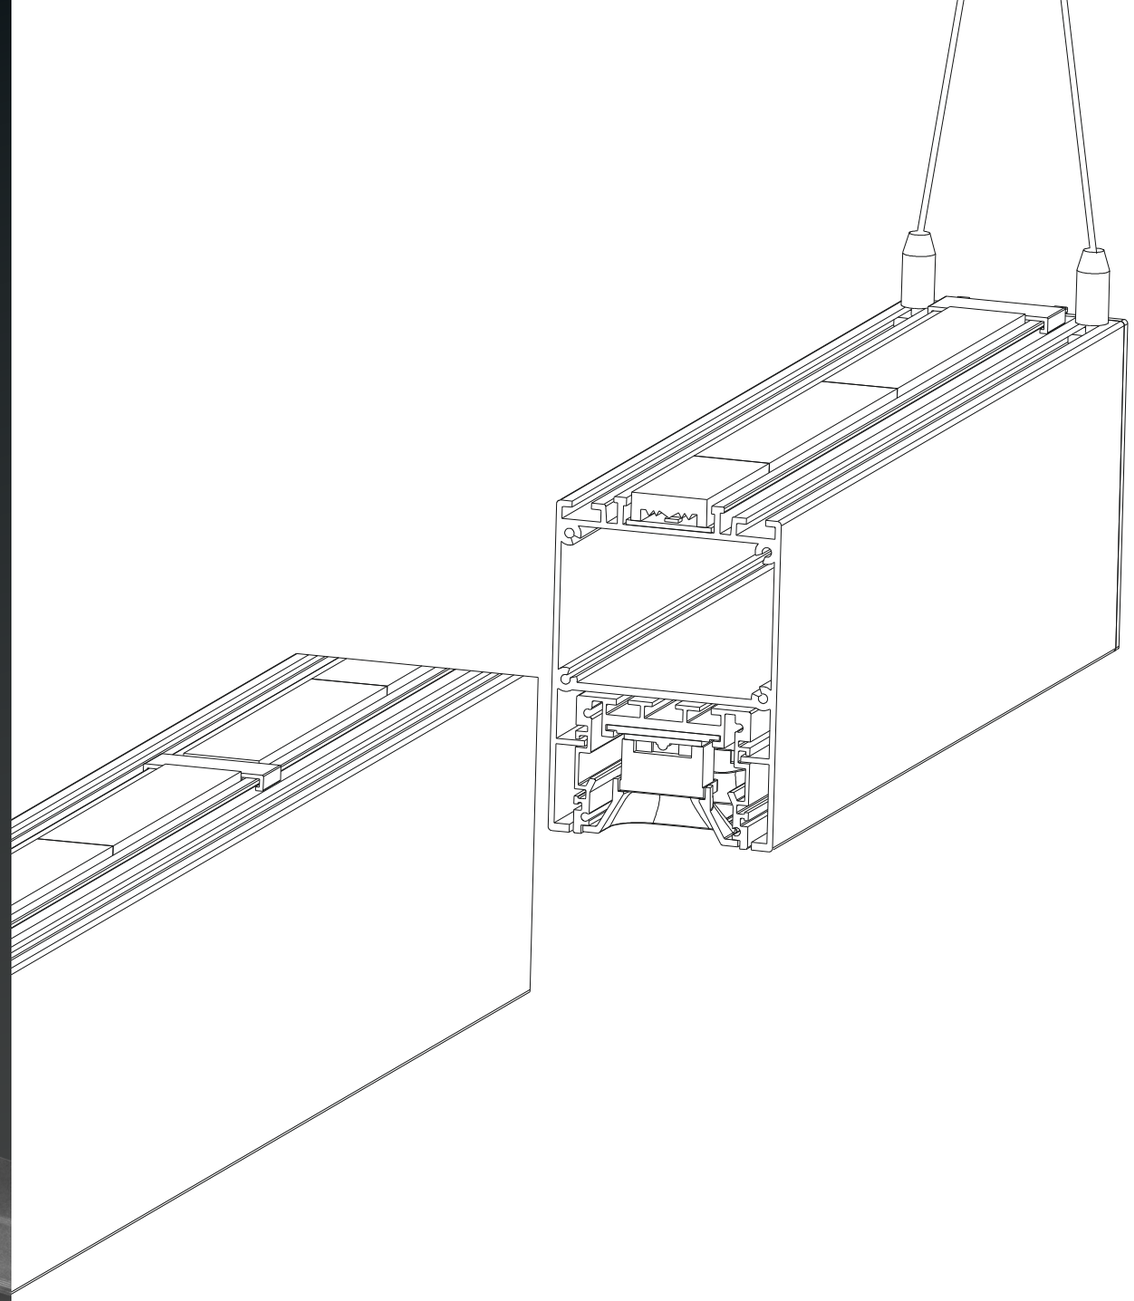

Multiple Part A



Multiple Part B



Surface mounted




Multiple installation lamp (with different constructions) bring us diversified luminous effect; Including spot, linear, and accent lighting etc. different group of mould, free change of the lighting effect according to the application required, and easy operation; It is the development direction of the lighting industry.

LED LINEAR LIGHT SERIES



LED Recessed Linear light with small linear design makes a simple and modern Decoration
Wallwasher and direct light output -two ways of light output for section
High thermal conductivity aluminum lamp body, seamless splicing and more flexible

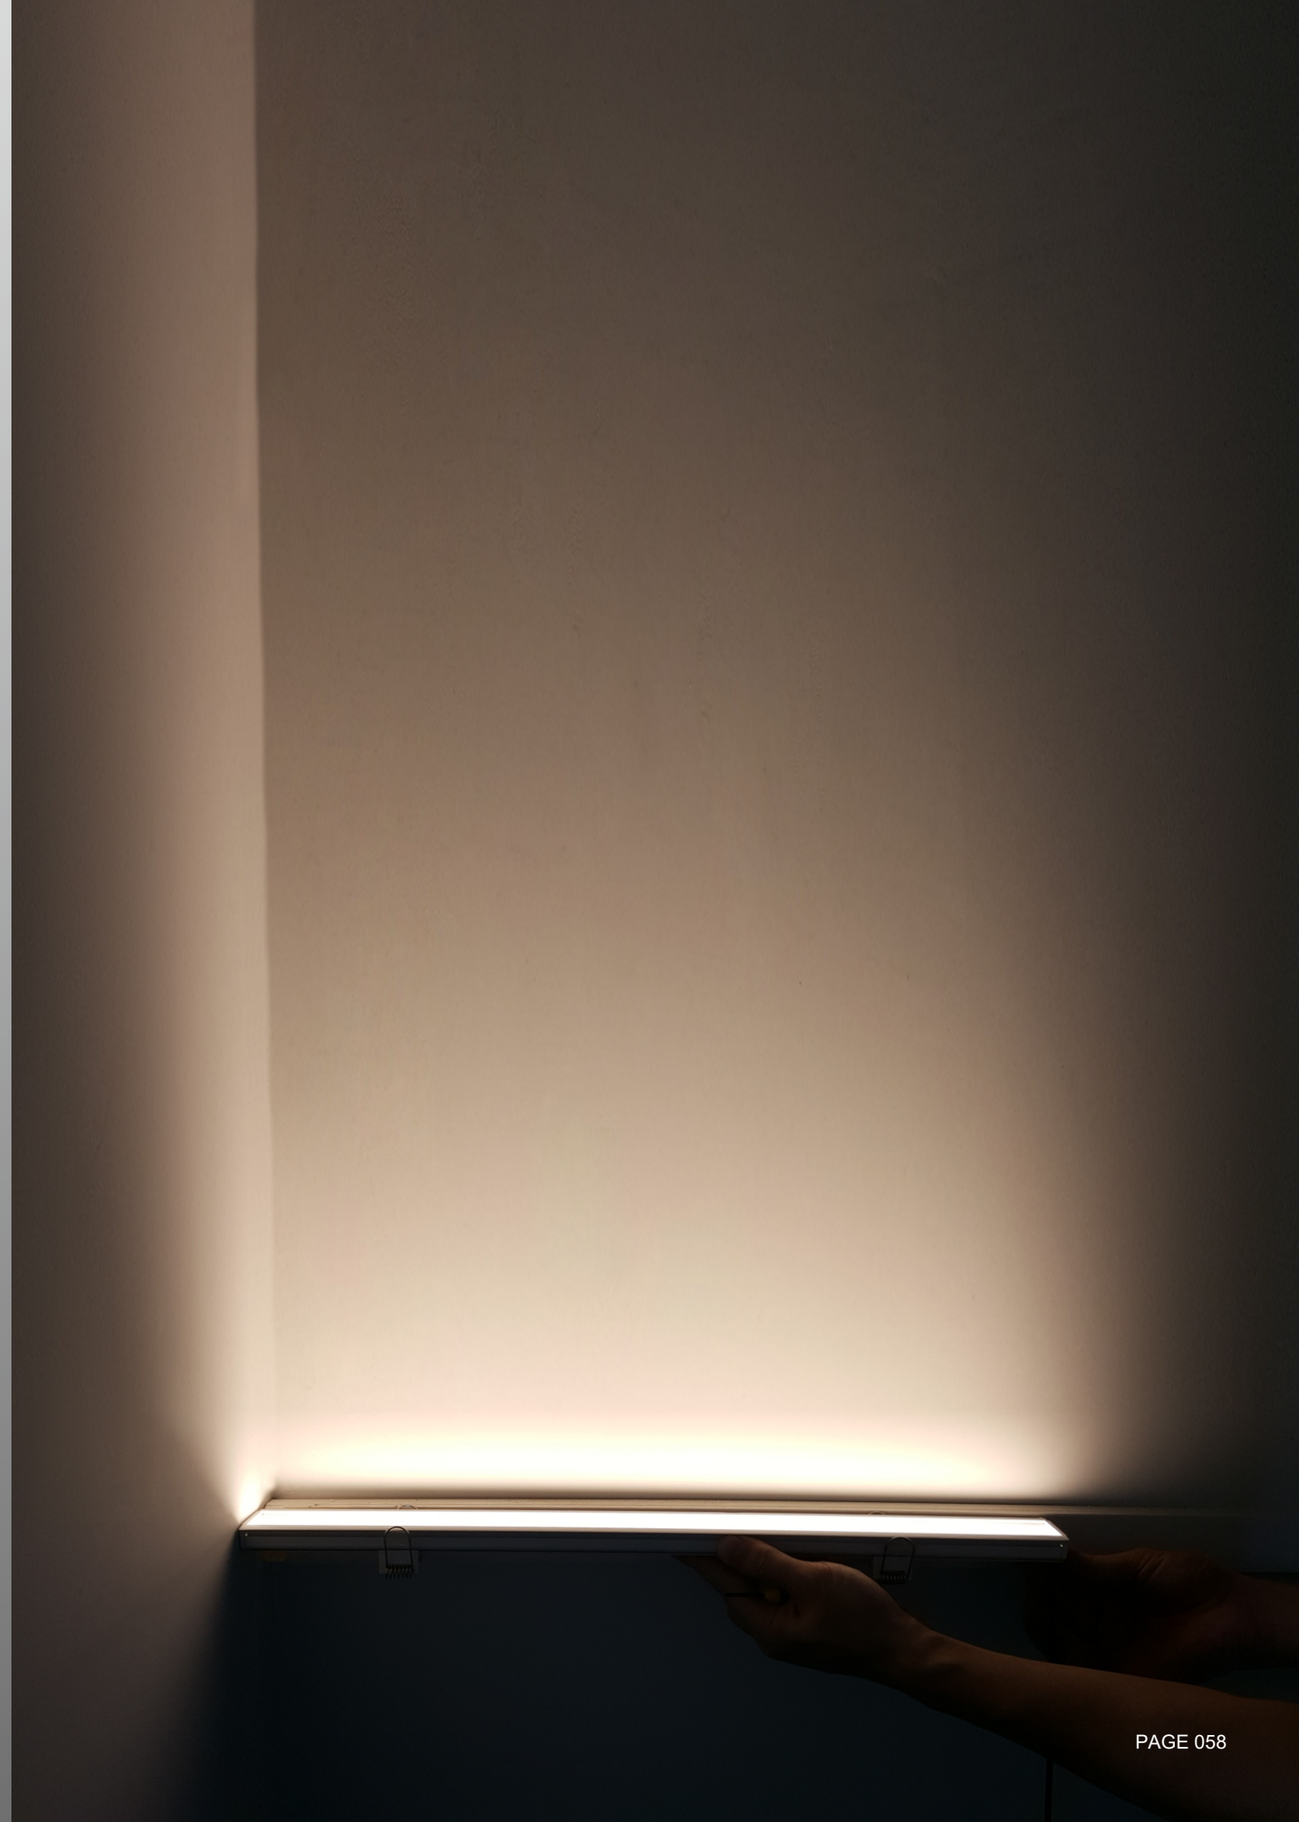




FS8026-30
Max.30W

Operating Temp. : -30℃ + 40℃
27W SMD chip (2*72pcs 2835) DC700mA
- 2700K/2100lm CRI90
- 3000K/2300lm CRI90
- 4000K/2550lm CRI80
- 5000K/2800lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle

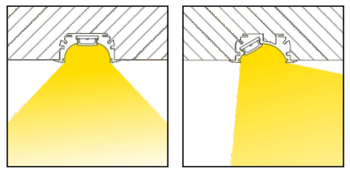

FS8026
Symmetric optics

FS8027
Asymmetric optics 30°




Color selection


B	S	W




FS8026




FS8027




FS8026-15




FS8026-30




FS8027-15




FS8027-30




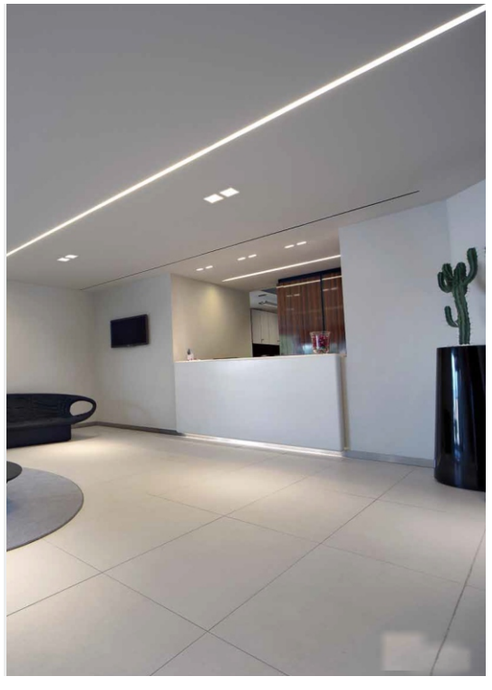

OFFICE

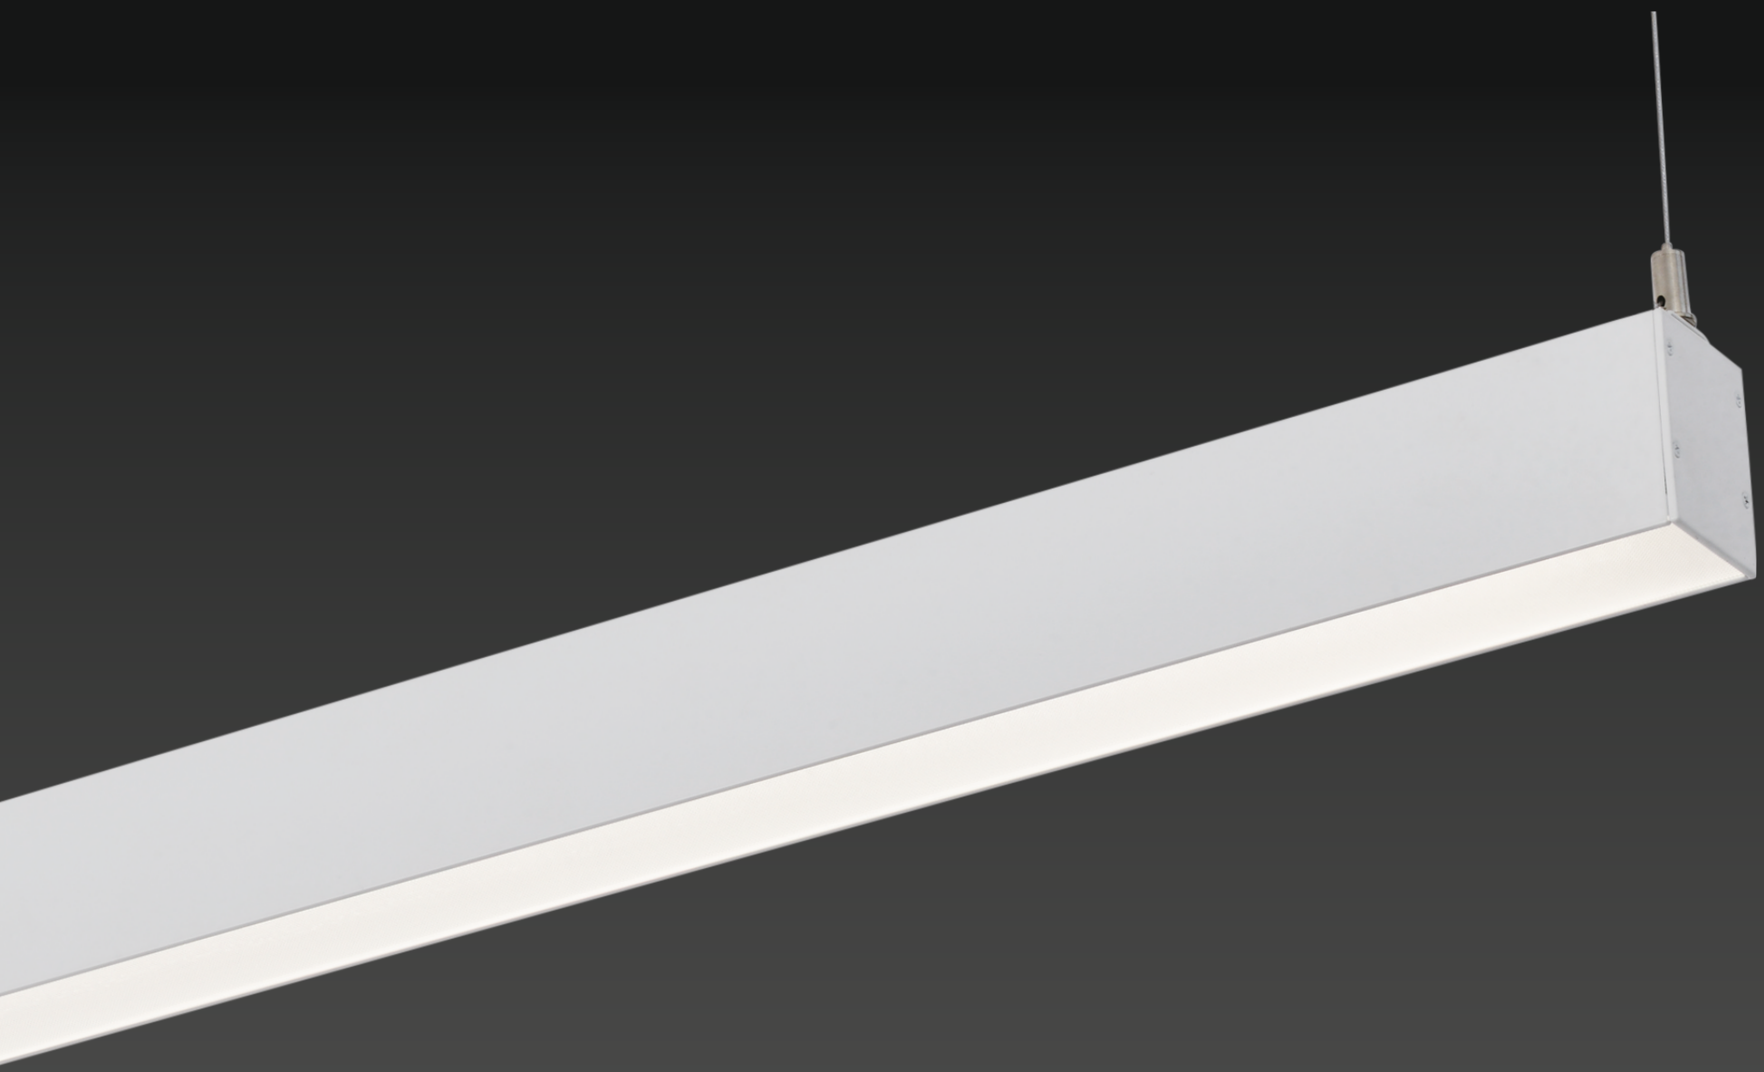



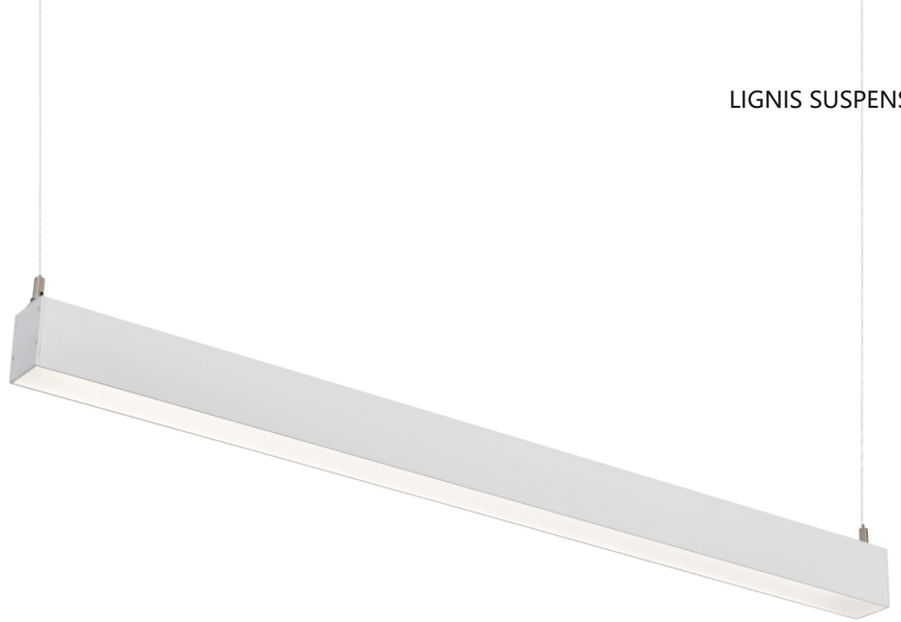


LIGNIS FS800



L1220*W62*H80mm
L1220*W50*H36.5mm


Longueur possible jusqu'à 3.50m

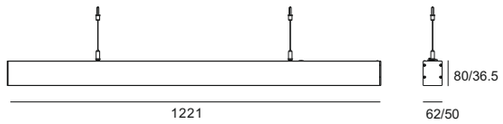








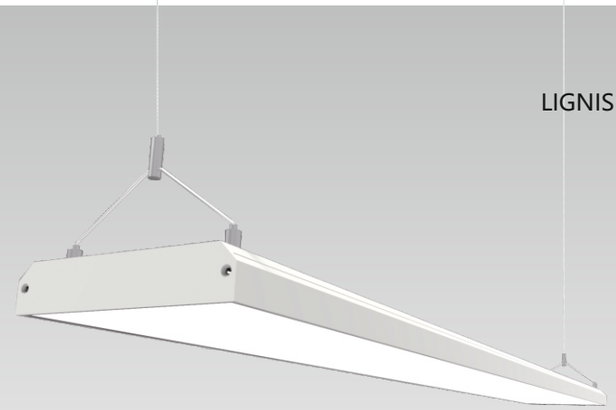

FS800
L1200*W100*H29mm

Remote Driver:AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



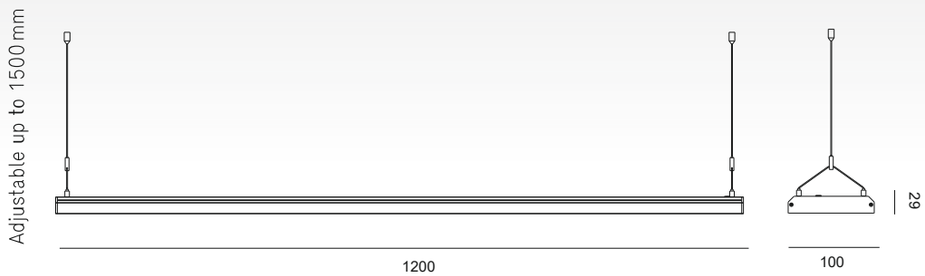






LIGNIS FAIBLE HAUTEUR 30mm
FS801

L1200*W30*H30mm Remote driver
L1200*W100*H30mm Remote driver

Longueur possible jusqu'à 3m

Remote Driver:AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali







FS802


Longueur possible sur-mesure

L1200*W50*H36.5mm Remote driver


L1200*W50*H65mm With driver inside

L1200*W62*H43mm Remote driver
L1200*W62*H80mm With driver inside

L1200*W100*H43mm Remote driver





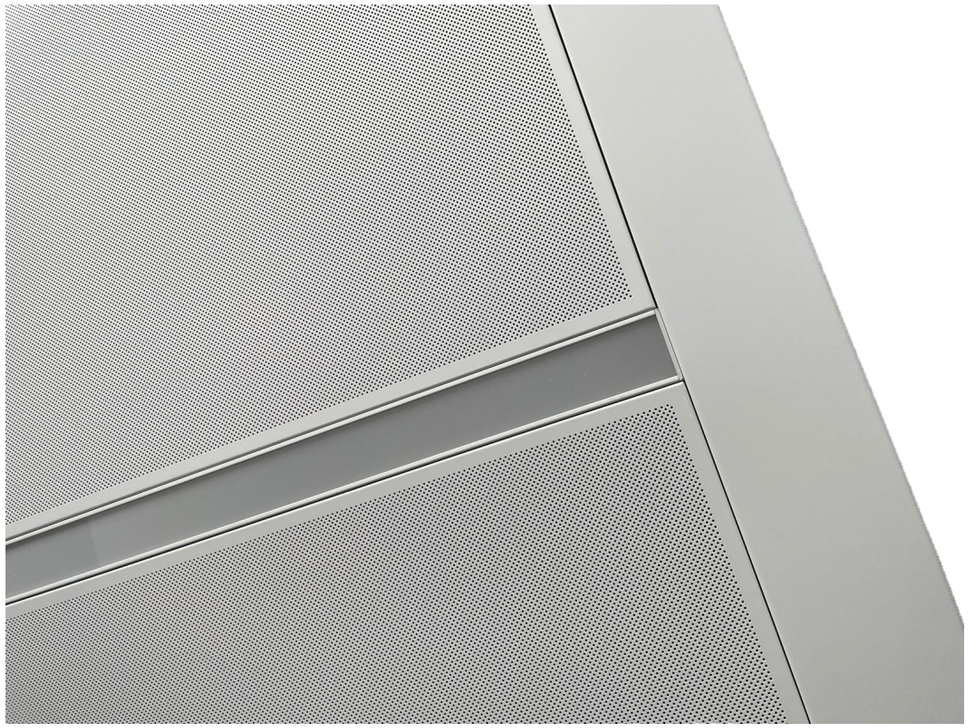




FS803 ENCASTRE STAFF

L1200*W56*H45mm


Longueur possible sur-mesure

Remote Driver:AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali







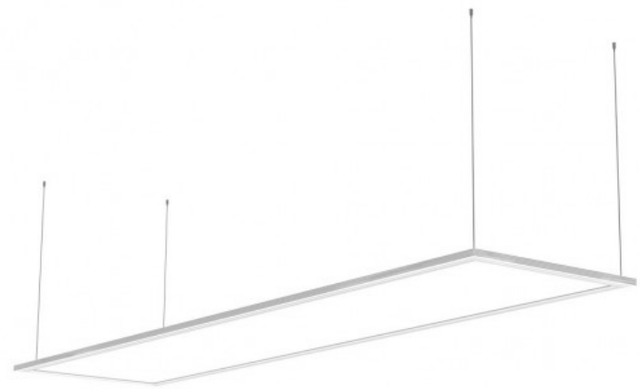


PANNELUM 300*1350
ENCASTRE STAFF/SUSPENSION


Longueur et largeur sur-mesure

L1350*W300*H10mm


Remote Driver:AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Schéma de principe

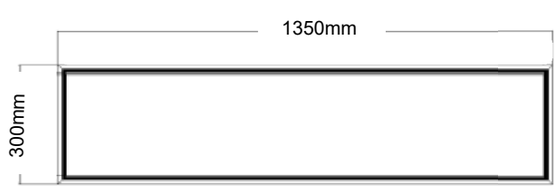

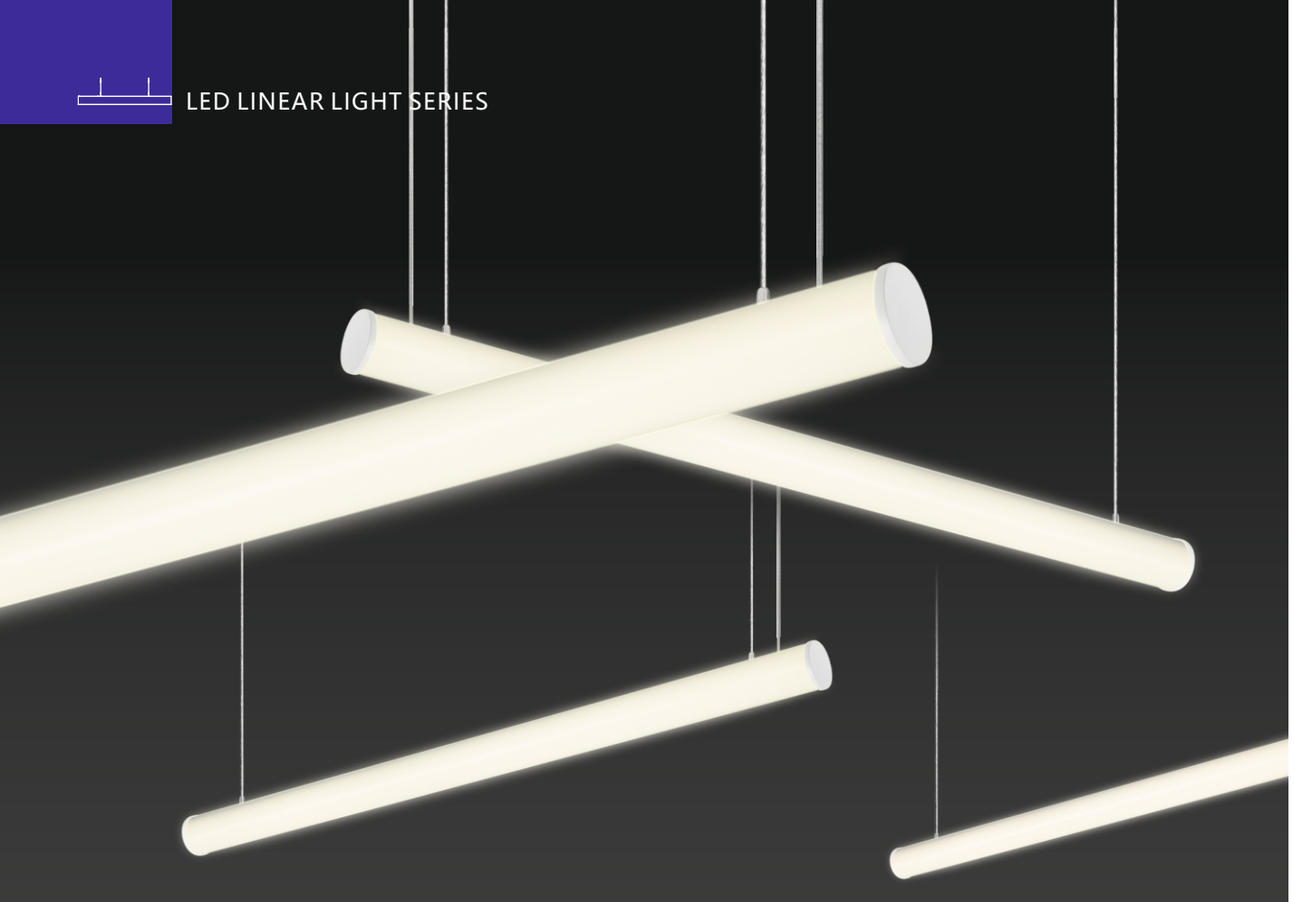



* Housing made of high pressure extruded aluminum construction
* UV and Corrosion resistance, with durable, anti-fading finish in Architectural Silver Grey or Matt White (can customize according required)
* high transmittance PMMA diffuser specially designed for LED light sources creating smooth and uniform lighting distributions
* Installation: Suspended

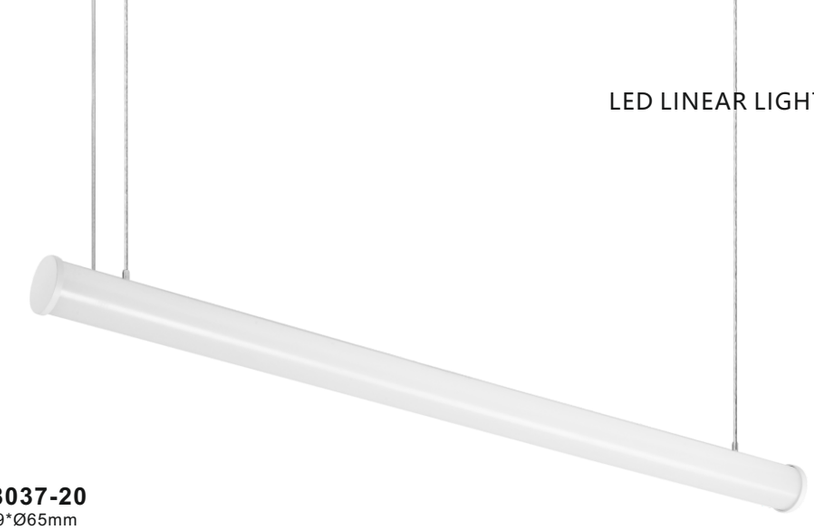

FS8037-20
L1119*Ø65mm
25W
3000K/2300lm
4000K/2600lm

Remote Driver:AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali



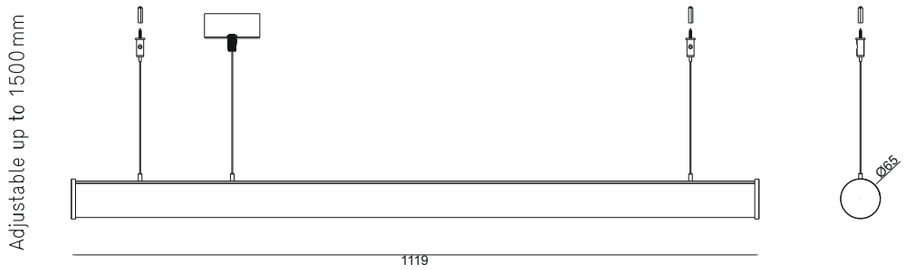





FS4049
SERIES

Color selection
B S W




FS4049-30
Max.30W


Operating Temp. : -30°C ~ 40°C
SMD2835PCS(DC700mA)
- 2700K/1125lm CRI90
- 3000K/1200lm CRI90
- 4000K/1350lm CRI90
- 5000K/1500lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle








FS4049-15
Max.15W

Operating Temp. : -30°C ~ 40°C
SMD2835* 84PCS(DC350mA)
- 2700K/1125lm CRI90
- 3000K/1200lm CRI90
- 4000K/1350lm CRI90
- 5000K/1500lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle





www.fansenlamp.com

CE CB SMD Alu. IES IP40




FS1004Z


LED SURFACE MOUNTED PENDANT LIGHT SERIES

Led surface mounted pendant light with high quality die casting alumnaries. simple design structure make elegant application visual effect and the efficiency of heat dissipation


FS1004Z03
16W



FS1004Z02
12W




FS1004Z01
8W





LED CEILING DOWNLIGHT SERIES

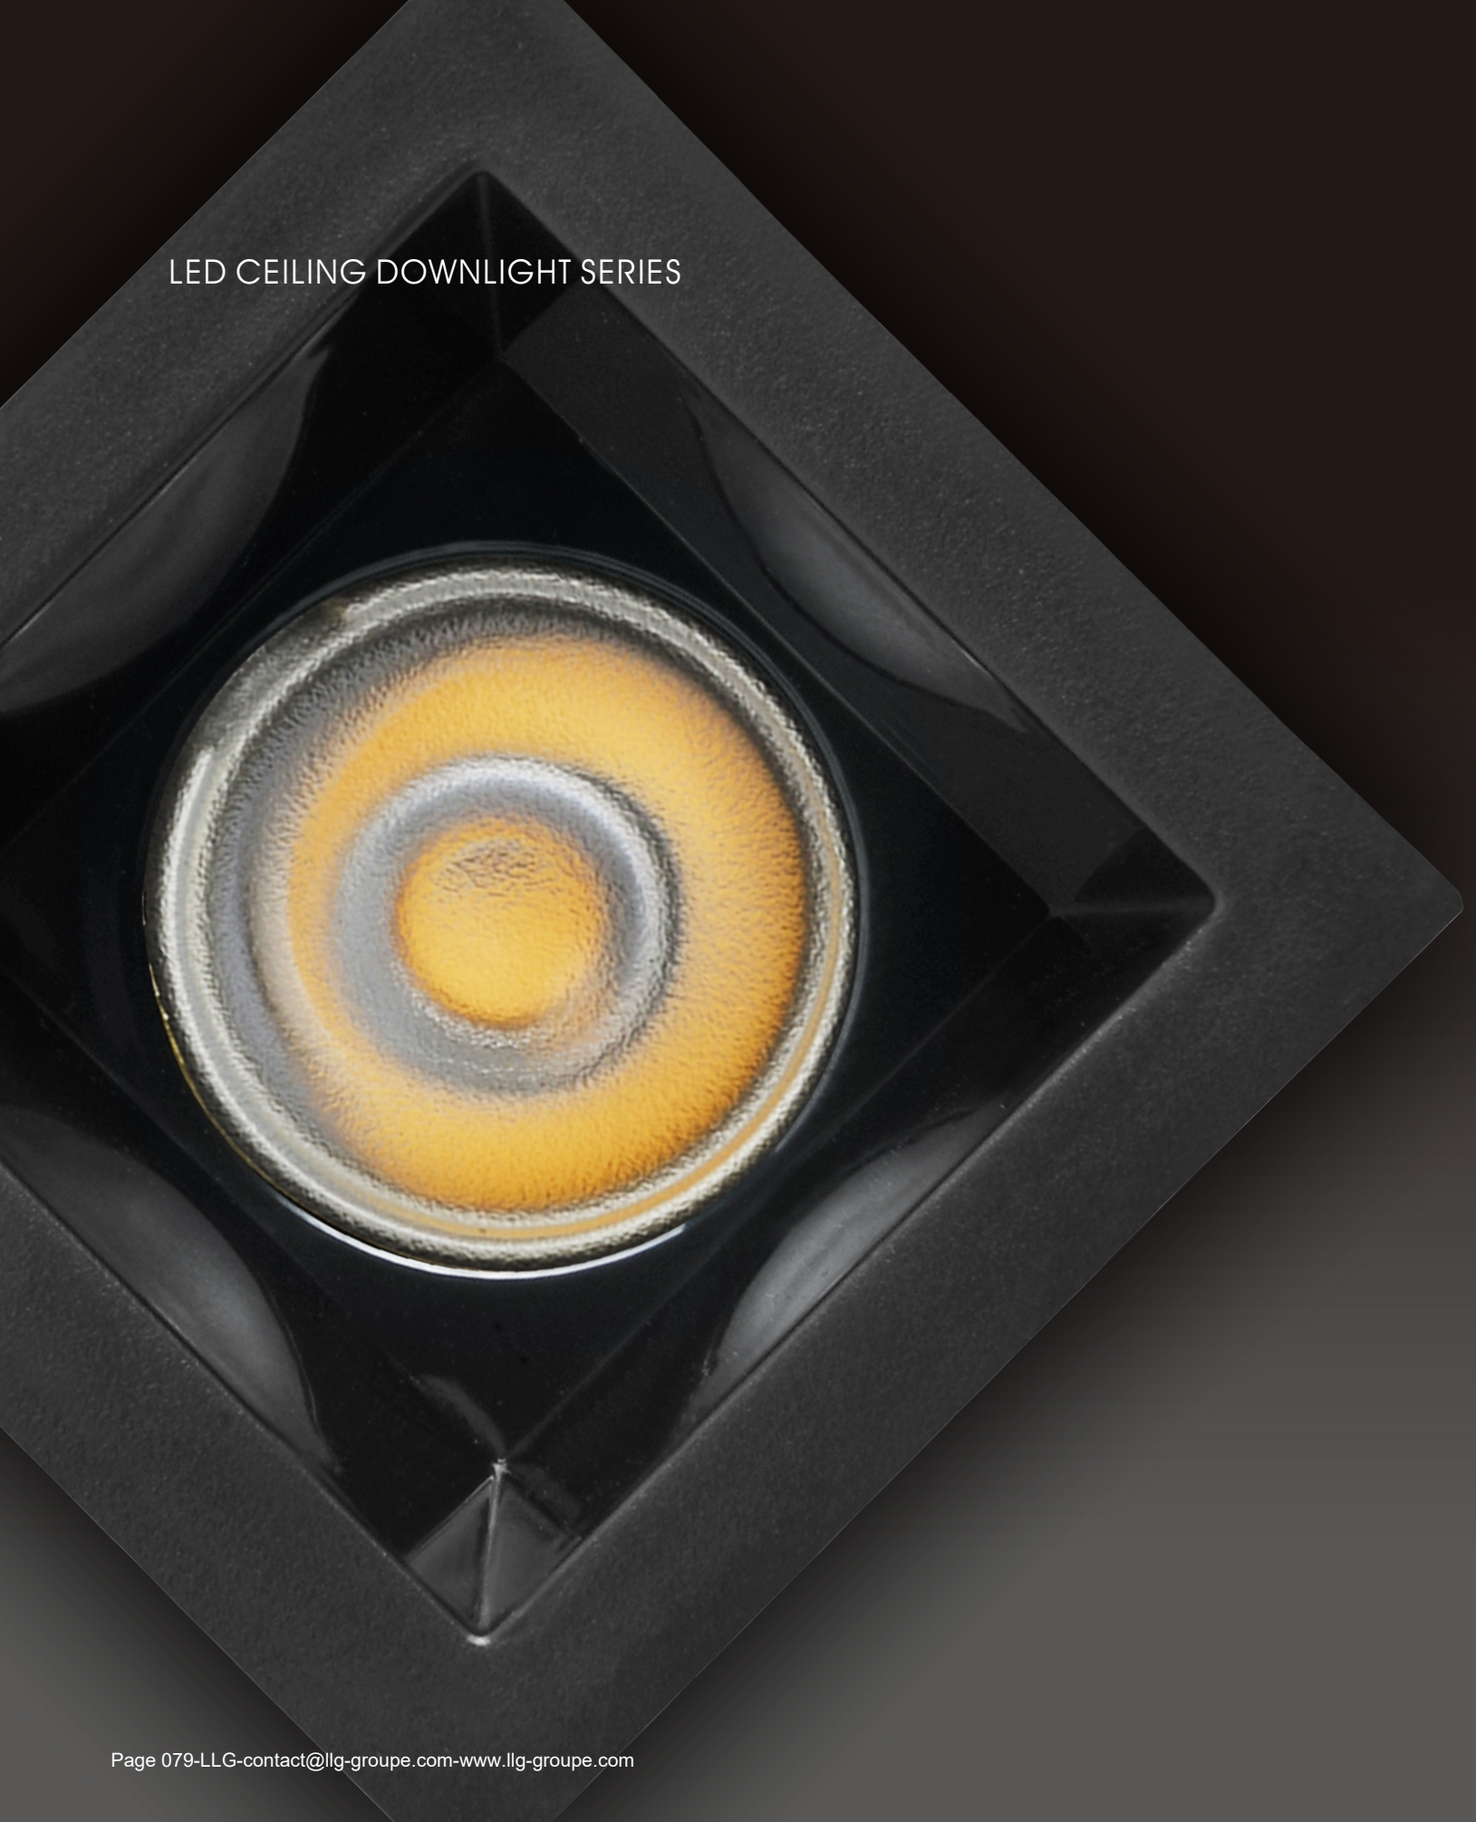


Suface light




Track light



Ceiling light

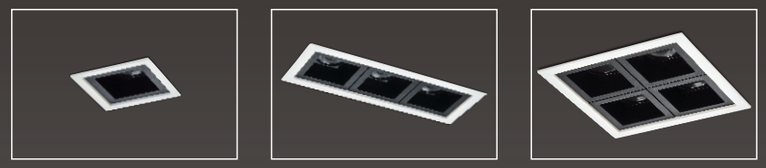


Recessed linear light

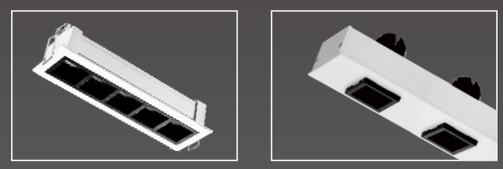





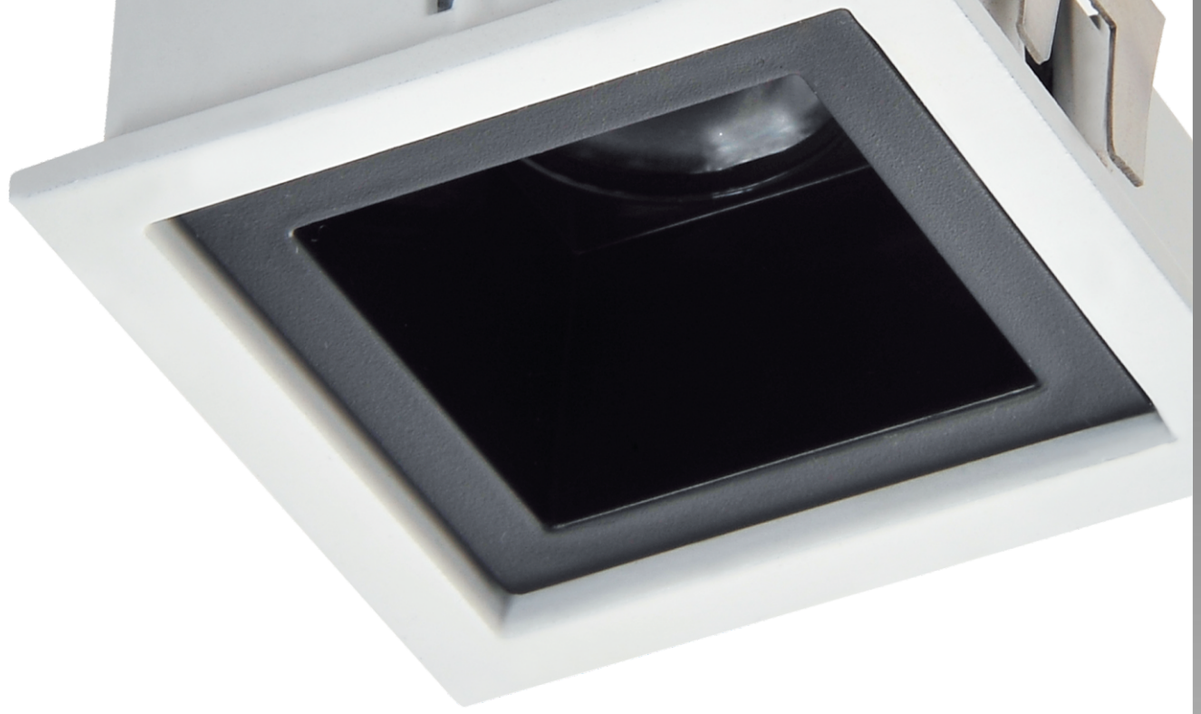

FS2037-05


Max.5W

Operating Temp. : -30℃ + 40℃
4.5W SMD chip (DC500mA)

- 2700K/300lm CRI90
- 3000K/330lm CRI90
- 4000K/375lm CRI80
- 5000K/425lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Dali/0~10v/Triac

Beam angle



Color selection

B | S | W


Details of the figure




Selected color




FS2037-05




FS2037-10



FS2037-15




FS2037-20

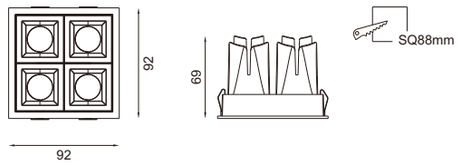









FS1074-20


Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)

- 2700K/1405lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W

Recessed LED adjustable spot light with high purity molding, excellent and life-guaranteed heat sink design, 360° horizontally 45°tilt provides flexible projection demand .

Application: fashion shop, jewelry display and other high end accent lighting areas.

CE CB COB Alu. IES IP40



LED CEILING DOWNLIGHT SERIES








Recessed LED Retracted spot light with high purity molding, slide up-and-down positioning design and 360° horizontally 90° vertically provides flexible projection demand .
Application: fashion shop, jewelry display and other high end accent lighting areas.













FS1064-30


Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)

- 2700K/2017lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W







FS1064-20


Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)

- 2700K/1405lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W





FS1064-15


Max.15W

Operating Temp. : -30℃ + 40℃
13W COB chip (DC350mA)

- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection


B | S | W

LED CEILING DOWNLIGHT SERIES



Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle refelctor for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.






Model	P	H
FS5045-30	Max.30W	116
FS5045-35	Max.35W	126
FS5045-42	Max.42W	141

Operating Temp. : -30℃ + 40℃
32W COB chip (DC800mA) /FS5045-35
- 2700K/2625lm CRI90
- 3000K/2900lm CRI90
- 4000K/3300lm CRI80
- 5000K/3675lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W










Model	P	H
FS5045-15	Max.15W	82
FS5045-22	Max.22W	97

Operating Temp. : -30℃ + 40℃
13W COB chip (DC350mA)/FS5045-15
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






FS5075A-09
Max.9W

Operating Temp. : -30℃ + 40℃
7.5W COB chip (DC200mA)
- 2700K/630lm CRI90
- 3000K/702lm CRI90
- 4000K/783lm CRI80
- 5000K/864lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W


LED CEILING DOWNLIGHT SERIES



Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle refelctor for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.








FS5088-20

Max.20W


Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1264lm CRI90
- 3000K/1440lm CRI90
- 4000K/1665lm CRI80
- 5000K/1890lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection




Frosted Glass


Clear Glass





Model	P	H
FS5086-11	Max.11W	85.5
FS5086-15	Max.15W	100







FS5086-20


Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1264lm CRI90
- 3000K/1440lm CRI90
- 4000K/1665lm CRI80
- 5000K/1890lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection





Frosted Glass


Clear Glass

Operating Temp. : -30℃ + 40℃
10W COB chip (DC250mA)/FS5086-11
- 2700K/759lm CRI90
- 3000K/770lm CRI90
- 4000K/913lm CRI80
- 5000K/935lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle



Color selection





Frosted Glass


Clear Glass








Model	P	H
FS5088-11	Max.11W	85.5
FS5088-15	Max.15W	100

Operating Temp. : -30℃ + 40℃
10W COB chip (DC250mA) FS5088-11
- 2700K/759lm CRI90
- 3000K/770lm CRI90
- 4000K/913lm CRI80
- 5000K/935lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle



Color selection


B | S | W


Frosted Glass



Clear Glass

LED CEILING DOWNLIGHT SERIES










FS1014-15

Max.15W

Operating Temp. : -30℃ + 40℃
13W COB chip (DC350mA)
- 2700K/990lm CRI90
- 3000K/1110lm CRI90
- 4000K/1255lm CRI80
- 5000K/1390lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W



Frosted Glass Clear Glass






FS1013-09

Max.9W

Operating Temp. : -30℃ + 40℃
7.5W COB chip (DC200mA)
- 2700K/600lm CRI90
- 3000K/670lm CRI90
- 4000K/750lm CRI80
- 5000K/820lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W



Frosted Glass Clear Glass






FS1012-05

Max.5W

Operating Temp. : -30℃ + 40℃
4.5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/380lm CRI90
- 4000K/420lm CRI80
- 5000K/470lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W



Frosted Glass Clear Glass



LED CEILING DOWNLIGHT SERIES








Selected color



Recessed LED Retracted spot light with high purity molding, slide up-and-down positioning design and 360° horizontally 90° vertically provides flexible projection demand .
Application: fashion shop, jewelry display and other high end accent lighting areas.





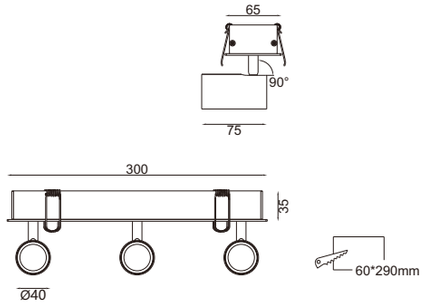


FS4034-18

Max.18W

Operating Temp. : -30℃ + 40℃
3×5W COB chip (DC500mA)
- 2700K/1050lm CRI90
- 3000K/1290lm CRI90
- 4000K/1500lm CRI80
- 5000K/1530lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac


Beam angle



Color selection


B | S | W












FS4034-12

Max.12W

Operating Temp. : -30℃ + 40℃
2×5W COB chip (DC500mA)
- 2700K/700lm CRI90
- 3000K/860lm CRI90
- 4000K/1000lm CRI80
- 5000K/1020lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection

B | S | W


FS4034-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection

B | S | W


Ultra-narrow width design, make your decoration effect more artistic and modern
Simple, elegant, unique design, easy to disassemble
Perfect light shape, lighting designers' first option
2 styles(adjustablen/non-adjustable)for selection





Frosted Glass

Clear Glass





Simple, elegant, unique design,
easy to disassemble




Soft and uniform light spot,
no stray light.



Perfect light shape,makes
a comfortable, luxurious
visual effect,The Lighting
Designers' first option.








Model	P	H
FS5071-12	Max.12W	120
FS5071-18	Max.18W	130

Operating Temp. : -30℃ + 40℃
12W / 16W COB chip (DC300mA / DC450mA)
- 2700K/851lm 1260lm CRI90
- 3000K/936lm 1368lm CRI90
- 4000K/1056lm 1584lm CRI80
- 5000K/1176lm 1728lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






Model	P	H
FS5073-12	Max.12W	115
FS5073-18	Max.18W	125

Operating Temp. : -30℃ + 40℃
12W / 16W COB chip (DC300mA / DC450mA)
- 2700K/851lm 1260lm CRI90
- 3000K/936lm 1368lm CRI90
- 4000K/1056lm 1584lm CRI80
- 5000K/1176lm 1728lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W


LED CEILING DOWNLIGHT SERIES



Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle refelctor for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.





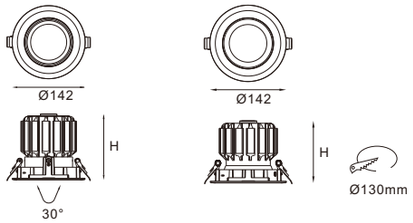

FS5070-30 **FS5080-30**

Model	P	H
FS5070-30	Max.30W	113
FS5070-35	Max.35W	123
FS5080-30	Max30W	106
FS5080-35	Max.35W	116

Operating Temp. : -30℃ + 40℃
26W / 30W COB chip (DC700mA / DC800mA)
- 2700K/2115lm 2450lm CRI90
- 3000K/2280lm 2735lm CRI90
- 4000K/2640lm 3080lm CRI80
- 5000K/2910lm 3435lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass




Clear Glass

Beam angle



Color selection

B | S | W



Model	P	H
FS1060-30	Max.30W	128
FS1060-35	Max.35W	138
FS1060-42	Max.42W	153

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA) / FS1060-30
- 2700K/2107lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Frosted Glass

Clear Glass


Beam angle



Color selection

B | S | W





Model	P	H
FS5041-15	Max.15W	82
FS5042-22	Max.22W	97


Operating Temp. : -30℃ + 40℃
13W / 19W COB chip (DC350mA / DC500mA)
- 2700K/1050lm 1543lm CRI90
- 3000K/1170lm 1716lm CRI90
- 4000K/1326lm 1936lm CRI80
- 5000K/1470lm 2156lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass


Beam angle



Color selection







FS5072-25

Max.25W


Operating Temp. : -30℃ + 40℃
23W COB chip (DC600mA)
- 2700K/1750lm CRI90
- 3000K/1975lm CRI90
- 4000K/2250lm CRI80
- 5000K/2450lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI0~10v/Triac


Frosted Glass

Clear Glass

Beam angle



Color selection






FS5103-09

Max.9W

Operating Temp. : -30℃ + 40℃
7.5W COB chip (DC200mA)
- 2700K/600lm CRI90
- 3000K/670lm CRI90
- 4000K/750lm CRI80
- 5000K/820lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Frosted Glass


Clear Glass

Beam angle




Color selection








Recessed LED downlight with quality aluminum body in powder-coated, with multiple reflecting angles of anti-dazzle refelctor for selection, excellent heat sink capability, remote LED driver.
Application: supermarkets, chain stores, shopping mall, villas, hotels, halls.

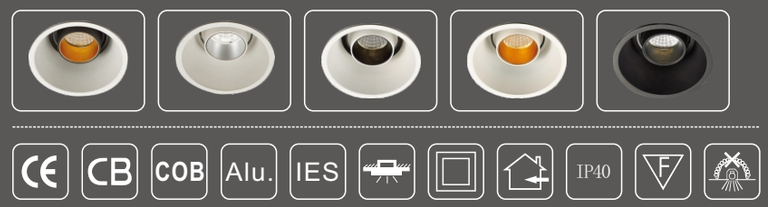







FS1083-06
Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Beam angle



Color selection

B | S | W






FS1083-13
Max.13W

Operating Temp. : -30℃ + 40℃
11.5W COB chip (DC300mA)
- 2700K/700lm CRI90
- 3000K/850lm CRI90
- 4000K/1020lm CRI80
- 5000K/1100lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection

B | S | W



LED CEILING DOWNLIGHT SERIES





FS5201-05


Max.5W

Operating Temp. : -30℃ + 40℃
4.5W SMD chip (DC1500mA)

- 2700K/315lm CRI90
- 3000K/342lm CRI90
- 4000K/378lm CRI80
- 5000K/423lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection

B | S | W



FS5040-05

Max.5W


Operating Temp. : -30℃ + 40℃
4.5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/380lm CRI90
- 4000K/420lm CRI80
- 5000K/470lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac




Frosted Glass

Clear Glass



Beam angle



Color selection

B | S | W



FS1076-02

FS1077-02

FS1076-02/FS1077-02

Max.2W

Operating Temp. : -30℃ + 40℃
1.5W SMD chip (DC500mA)
- 2700K/145lm CRI90
- 3000K/156lm CRI90
- 4000K/177lm CRI80
- 5000K/198lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac




Frosted Glass




Clear Glass


FS1076-02



FS1077-02




Beam angle



Color selection

B | S | W






FS5040-02

Max.2W

Operating Temp. : -30℃ + 40℃
1.5W SMD chip (DC500mA)
- 2700K/145lm CRI90
- 3000K/156lm CRI90
- 4000K/177lm CRI80
- 5000K/198lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac

Beam angle



Color selection

B | S | W



FS5053-05

Max.5W


Operating Temp. : -30℃ + 40℃
4.5W COB chip (DC500mA)
- 2700K/365lm CRI90
- 3000K/397lm CRI90
- 4000K/443lm CRI80
- 5000K/490lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac




Frosted Glass

Clear Glass






Beam angle



Color selection

B | S | W

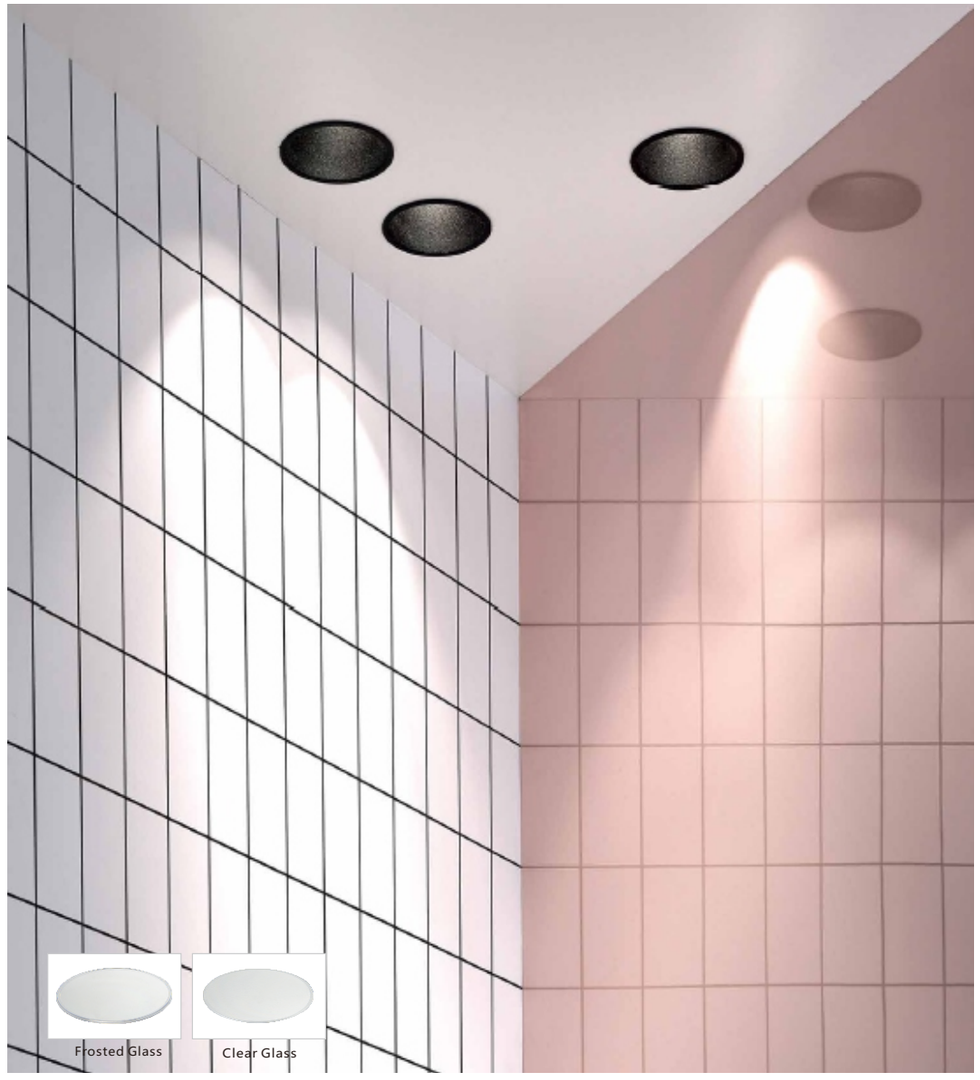






LED CEILING DOWNLIGHT SERIES





Model	P	H
FS1061B-09	Max.9W	108
FS1061B-15	Max.15W	122


Operating Temp. : -30℃ +40℃

13.5W COB chip (DC350mA) / FS1061B-15

- 2700K/1120lm CRI90
- 3000K/1286lm CRI90
- 4000K/1440lm CRI80
- 5000K/1568lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle





Color selection

B | S | W

Simple and special design for easy dismounting,One module with different optional front housing
Two Wattage (13/26W) for selecting.





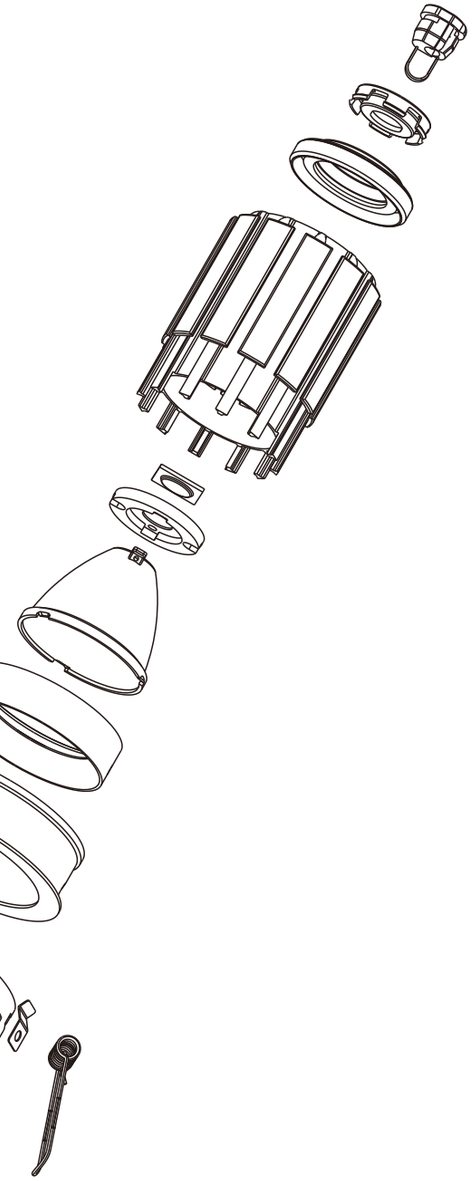









Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac


Frosted Glass

Clear Glass




FS5047-13

Max.13W

Operating Temp. : -30℃ + 40℃
11W COB chip (DC350mA)
- 2700K/926lm CRI90
- 3000K/1019lm CRI90
- 4000K/1144lm CRI80
- 5000K/1275lm CRI70

Beam angle



Color selection


B | S | W

FS5049-26

Max.26W

Operating Temp. : -30℃ + 40℃
23W COB chip (DC600mA)
- 2700K/1825lm CRI90
- 3000K/2028lm CRI90
- 4000K/2288lm CRI80
- 5000K/2548lm CRI70

Beam angle



Color selection


B | S | W



FS5048-13



FS-5048A-13

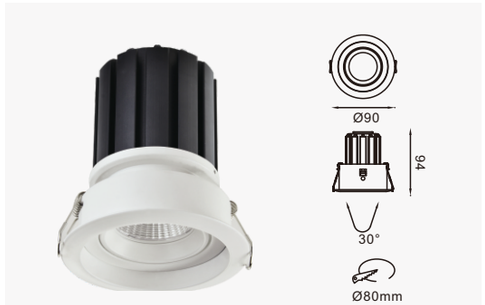

FS5047-13



FS5047A-13



FS5049-26




FS5049A-26



LED CEILING DOWNLIGHT SERIES







Model	P	H
FS5077-15	Max.15W	86
FS5077-25	Max.25W	106
FS5077-42	Max.42W	136

Operating Temp. : -30℃ + 40℃

38W COB chip (DC1000mA) / FS5077-42


- 2700K/2958lm CRI90
- 3000K/3360lm CRI90
- 4000K/3696lm CRI80
- 5000K/4116lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass


Clear Glass

Beam angle



Color selection

B | S | W






Model	P	H
FS5051-12	Max.12W	95
FS5051-20	Max.20W	115

Operating Temp. : -30℃ + 40℃
11W COB chip (DC300mA)
- 2700K/840lm CRI90
- 3000K/936lm CRI90
- 4000K/1056lm CRI80
- 5000K/1176lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection

B | S | W







FS5052-20
Max.18W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1418lm CRI90
- 3000K/1560lm CRI90
- 4000K/1760lm CRI80
- 5000K/1960lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac



Beam angle



Color selection

B | S | W



LED
CEILING DOWNLIGHT
EDONIS

Recessed LED adjustable spot light with high purity molding, excellent and life-guaranteed heat sink design, 360° horizontally 45°tilt provides flexible projection demand.

Application: fashion shop, jewelry display and other high end accent lighting areas.

Reflector color option


Beam angle

symmetrical
13°/ 24°/ 36°

FS1083
EDONIS

Color selection
B S W






	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1083A-06 Max.6W	6W	DC500mA	2700K	350lm	CRI90	-30°C+40°C
	6W	DC500mA	3000K	430lm	CRI90	-30°C+40°C
	6W	DC500mA	4000K	500lm	CRI90	-30°C+40°C
	6W	DC500mA	5000K	510lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1083-13 Max.13W	13W	DC300mA	2700K	700lm	CRI90	-30°C+40°C
	13W	DC300mA	3000K	850lm	CRI90	-30°C+40°C
	13W	DC300mA	4000K	1020lm	CRI90	-30°C+40°C
	13W	DC300mA	5000K	1100lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac




FS5218/FS5208

Color selection
B S W

FS5218-10



FS5218A-10



Beam angle




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5218-10 Max.2x5W	2x5W	DC500mA	2700K	400lm	CRI90	-30°C+40°C
	2x5W	DC500mA	3000K	430lm	CRI90	-30°C+40°C
	2x5W	DC500mA	4000K	490lm	CRI90	-30°C+40°C
	2x5W	DC500mA	5000K	550lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

CE CB COB Alu. IES IP40

FS5208-06



FS5208A-06



Beam angle



	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5208-06 Max.6W	6W	DC500mA	2700K	350lm	CRI90	-30°C+40°C
	6W	DC500mA	3000K	430lm	CRI90	-30°C+40°C
	6W	DC500mA	4000K	500lm	CRI90	-30°C+40°C
	6W	DC500mA	5000K	510lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

CE CB COB Alu. IES IP40



FS5210

Circular

The series luminaires with deep anti-glare, **IP54** protection and 90mm~135mm diameter range option,suitable for different application scenarios



FS5210
(S)



FS5210
(M)



FS5210
(L)

FS5210A

SERIES


Square



FS5210A
(S)



FS5210A
(M)

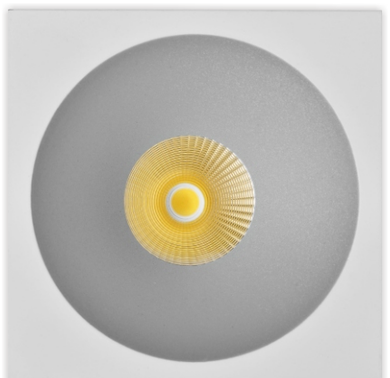

FS5210A
(L)

LED
CEILING DOWNLIGHT

Ultra-narrow trim with deep anti-glare design fixture make your decoration effect more artistic and modern ,simple ,elegant unique application. Square and round for selection.

Application: fashion shop, jewelry display and other high end accent lighting areas.




Reflector color option




FS5210

Color selection
B S W

FS5210-24



FS5210A-24




Beam angle




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5210-24 Max.24W	24W	DC600mA	2700K	1872lm	CRI90	-30°C+40°C
	24W	DC600mA	3000K	1920lm	CRI90	-30°C+40°C
	24W	DC600mA	4000K	2000lm	CRI90	-30°C+40°C
	24W	DC600mA	5000K	2040lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

FS5210-15



FS5210A-15



Beam angle




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5210-15 Max.15W	15W	DC350mA	2700K	1120lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1286lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1440lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1568lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac


FS5210

Color selection
B S W

FS5210-08



FS5210A-08



Beam angle




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5210-08 Max.8W	8W	DC200mA	2700K	635lm	CRI90	-30°C+40°C
	8W	DC200mA	3000K	712lm	CRI90	-30°C+40°C
	8W	DC200mA	4000K	792lm	CRI90	-30°C+40°C
	8W	DC200mA	5000K	886lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac




LED
CEILING DOWNLIGHT
SERIES

It's made up of mini grilles alternate the intermediate module to make completely symmetrical light and partial asymmetrical combination with Bluetooth controller alluminaries.

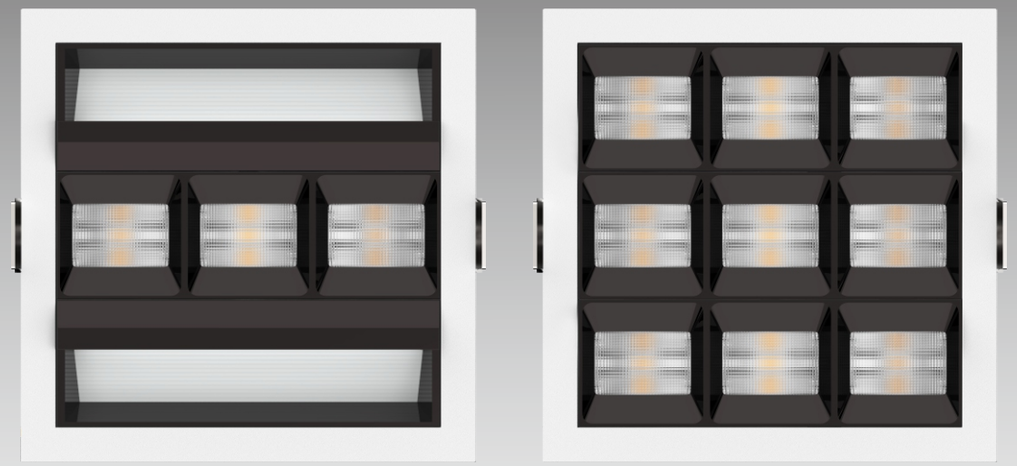


using bluetooth controller
App store: allumin

Configuration



2 X wallwasher

3 X symmetrical




9 X symmetrical

FS5206

Color selection
B S W

FS5206-40




Beam angle
Symmetrical
13°/ 24°/ 36°



	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5206-40 Max.40W	40W	DC1500mA	2700K	2815lm	CRI90	-30°C+40°C
	40W	DC1500mA	3000K	3120lm	CRI90	-30°C+40°C
	40W	DC1500mA	4000K	3520lm	CRI90	-30°C+40°C
	40W	DC1500mA	5000K	3925lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

FS5206A-40



Beam angle
2 X Wallwasher
3X Symmetrical
12°/23°/38°/50°/35*75°/50*50/70*70°



	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5206A-40 Max.40W	40W	Middile Part DC500mA Two side wall washer DC1000mA	2700K	2815lm	CRI90	-30°C+40°C
			3000K	3120lm	CRI90	-30°C+40°C
			4000K	3520lm	CRI90	-30°C+40°C
			5000K	3925lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

TRIMLESS CEILING DOWNLIGHT SERIES















COB lighting source + high-quality optical lens, softens light ; aluminum radiator,extend life.
Lamps trimless installation, better integration of the structure of the room,
to retain the original decoration style


Trimless Installation steps































FS5093-20

Max.20W

Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)
- 2700K/1300lm CRI90
- 3000K/1520lm CRI90
- 4000K/1700lm CRI80
- 5000K/1840lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W






Model	P	H
FS5093-09	Max.9W	100
FS5093-15	Max.15W	115

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)/FS5093-15
- 2700K/1050lm CRI90
- 3000K/1080lm CRI90
- 4000K/1250lm CRI80
- 5000K/1320lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






FS5093-05

Max.5W

Operating Temp. : -30℃ + 40℃
4.5W COB chip (DC500mA)
- 2700K/325lm CRI90
- 3000K/380lm CRI90
- 4000K/425lm CRI80
- 5000K/460lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection

B | S | W








FS5093A-20

Max.20W

Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)
- 2700K/1300lm CRI90
- 3000K/1520lm CRI90
- 4000K/1700lm CRI80
- 5000K/1840lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection








FS5093A-05

Max.5W

Operating Temp. : -30℃ + 40℃
4.5W COB chip (DC500mA)
- 2700K/325lm CRI90
- 3000K/380lm CRI90
- 4000K/425lm CRI80
- 5000K/460lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection








Model	P	H
FS5093A-09	Max.9W	100
FS5093A-15	Max.15W	115

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)/FS5093A-15
- 2700K/1050lm CRI90
- 3000K/1080lm CRI90
- 4000K/1250lm CRI80
- 5000K/1320lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle




Color selection



FS2039A-30































COB lighting source + high-quality optical lens, softens light ; aluminum radiator,extend life.
Lamps trimless installation, better integration of the structure of the room,
to retain the original decoration style








FS5202-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection







FS5202-13


Max.13W

Operating Temp. : -30℃ + 40℃
11.5W COB chip (DC300mA)
- 2700K/700lm CRI90
- 3000K/850lm CRI90
- 4000K/1020lm CRI80
- 5000K/1100lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac




Flat visual effects



Deep visual effects



Beam angle



Color selection



LED Modules series






Aluminum MR16/AR111 LED light, which with simple and elegant design, with a variety of beam angles and anti-glare reflectors.
Different housing can be choosen, perfect replacement of traditional MR16/AR111 light.
Application:star hotel, museum, exhibition hall, shopping malls, brandchain stores and so on.

Front Ring optional colors





FS1059A-15




FS1059-09

Max.9W

Operating Temp. : -30℃ + 40℃
7.5W COB chip (DC200mA)
- 2700K/630lm CRI90
- 3000K/703lm CRI90
- 4000K/783lm CRI80
- 5000K/864lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection

B | S | W





FS1059A-15




FS1059-15

Max.15W

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1170lm CRI90
- 4000K/1305lm CRI80
- 5000K/1440lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection

B | S | W



Item: FS1059-09-A
Size: Ø80mm
Cut out:75mm



Item: FS1059-09-B
Size: Ø80mm
Cut out:75mm



Item: FS1059-09-D
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-E
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-F
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-G
Size: Ø80mm
Cut out:70mm



Item: FS1059-09-H
Size: Ø91mm
Cut out:92mm






Item: FS1059-09-J
Size: SQ82mm
Cut out:SQ78mm




Item: FS1059-09-K
Size: SQ82mm
Cut out:SQ78mm



Item: FS1059-09-L
Size: SQ84*75mm
Cut out:SQ85*76mm



Item: FS1059-09-N
Size: Ø95mm
Cut out:85mm



Item: FS1059-09-O
Size: SQ95mm
Cut out:SQ85mm



Item: FS5101-09
Size: Ø82mm
Cut out:Ø85mm



Item: FS5101A-09
Size: SQ73mm
Cut out:SQ75mm



Recessed LED wall washer with white powder coated anti-glare die-cast housing,high thermal conductive heat sink and energy efficent electronic driver,Different shape of housing can be chosen in different application .
Application:living rooms, corridors, shops, shopping mall, hotel, restaurants.


















Model	P	H
FS6001-09	Max.9W	104
FS6001-15	Max.15W	116

Operating Temp. : -30℃ + 40℃
7.5W / 13.5W COB chip (DC200mA / DC350mA)
- 2700K/639lm 1065lm CRI90
- 3000K/702lm 1170lm CRI90
- 4000K/792lm 1320lm CRI80
- 5000K/882lm 1425lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass


Clear Glass




Beam angle



Color selection

B | S | W





Model	P	H
FS6002-09	Max.9W	104
FS6002-15	Max.15W	116

Operating Temp. : -30℃ + 40℃
7.5W / 13.5W COB chip (DC200mA / DC350mA)
- 2700K/639lm 1065lm CRI90
- 3000K/702lm 1170lm CRI90
- 4000K/792lm 1320lm CRI80
- 5000K/882lm 1425lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass


Clear Glass


Beam angle:15 ° /25 ° /36 °



Color selection

B | S | W





Model	P	H
FS6003-09	Max.9W	104
FS6003-15	Max.15W	116


Operating Temp. : -30℃ + 40℃
7.5W / 13.5W COB chip (DC200mA / DC350mA)
- 2700K/639lm 1065lm CRI90
- 3000K/702lm 1170lm CRI90
- 4000K/792lm 1320lm CRI80
- 5000K/882lm 1425lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass


Beam angle



Color selection

B | S | W





Model	P	H
FS6004-09	Max.9W	104
FS6004-15	Max.15W	116

Operating Temp. : -30℃ + 40℃
7.5W / 13.5W COB chip (DC200mA / DC350mA)
- 2700K/639lm 1065lm CRI90
- 3000K/702lm 1170lm CRI90
- 4000K/792lm 1320lm CRI80
- 5000K/882lm 1425lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass

Beam angle:15 ° /25 ° /38 °



Color selection

B | S | W

LED HOTEL DOWN LIGHT










Recessed LED spot light with die custing heat sink , high quality aluminum body narrow edge trim in powder-coated.Flexible replacement different color reflector.








FS5205-20

Max.18W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1418lm CRI90
- 3000K/1560lm CRI90
- 4000K/1760lm CRI80
- 5000K/1960lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






FS5205-12

Max.12W

Operating Temp. : -30℃ + 40℃
11W COB chip (DC300mA)
- 2700K/840lm CRI90
- 3000K/936lm CRI90
- 4000K/1056lm CRI80
- 5000K/1176lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






FS5205-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac

Beam angle



Color selection

B | S | W








CE CB COB Alu. IES IP40





Model	P	H
FS6012A-15	Max.15W	126
FS6012A-20	Max.20W	141


Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)/FS6012A-20
- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass


Beam angle



Color selection

B | S | W





Model	P	H
FS6012-15	Max.15W	126
FS6012-20	Max.20W	141


Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)/FS6012-20
- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass

Beam angle




Color selection

B | S | W








FS6013-50W

Max.50W

Operating Temp. : -30℃ + 40℃
45W COB chip (DC1200mA)
- 2700K/3250lm CRI90
- 3000K/3800lm CRI90
- 4000K/4250lm CRI80
- 5000K/4600lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle




Color selection

B | S | W

CE CB COB Alu. IES IP40

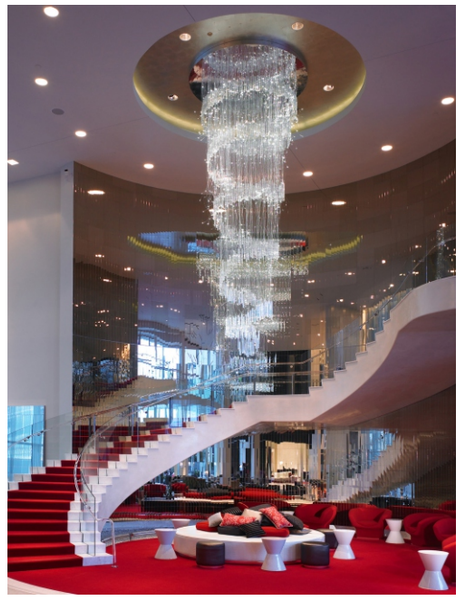




FS6200-30


Max.30W

Operating Temp. : -30℃ + 40℃
27W COB chip (DC700mA)/FS6010-30
- 2700K/2106lm CRI90
- 3000K/2280lm CRI90
- 4000K/2640lm CRI80
- 5000K/2880lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac









Model	P	H
FS6010-30	Max.30W	151
FS6010-42	Max.42W	176


Operating Temp. : -30℃ + 40℃
27W COB chip (DC700mA)/FS6010-30
- 2700K/2106lm CRI90
- 3000K/2280lm CRI90
- 4000K/2640lm CRI80
- 5000K/2880lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass


Clear Glass

Beam angle



Color selection

B | S | W



Model	P	H
FS6007-20	Max.20W	139
FS6007-30	Max.30W	154
FS6007-42	Max.42W	179

Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)/FS6007-20
- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass


Clear Glass


Beam angle:15 ° /25 ° /38 °



Color selection

B | S | W





Model	P	H
FS6006-20	Max.20W	139
FS6006-30	Max.30W	154
FS6006-42	Max.42W	179


Operating Temp. : -30℃ + 40℃
18W COB chip (DC500mA)/FS6006-20
- 2700K/1260lm CRI90
- 3000K/1418lm CRI90
- 4000K/1585lm CRI80
- 5000K/1764lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Frosted Glass

Clear Glass

Beam angle



Color selection

B | S | W





LED
CEILING DOWNLIGHT
SERIES

Recessed led spotlight adopt integrated die casting lamp body design. Flexible replacement of refector to reach different application effect.



Application: fashion shop, jewelry display and other high end accent lighting areas.



Configuration





Asymmetric optics
wallwasher

symmetrical
16°/ 26°/ 35°

Reflector color option





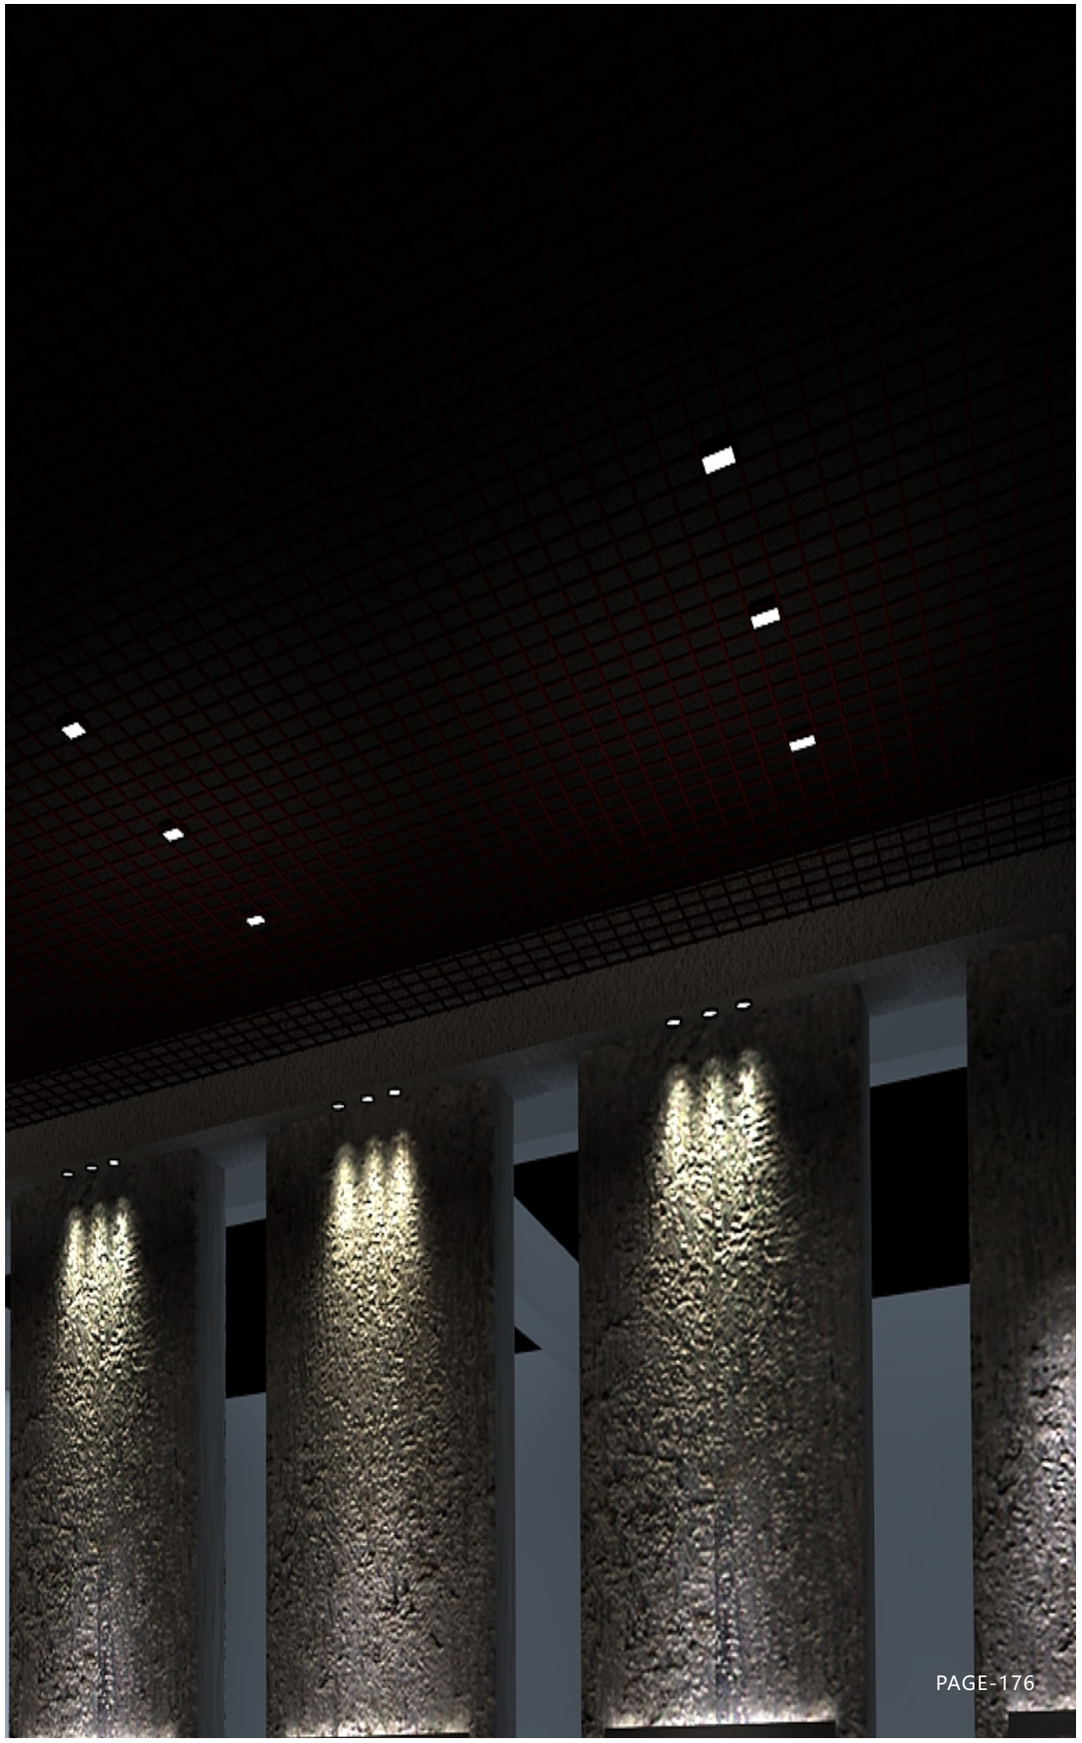

LED
CEILING DOWNLIGHT SERIES

Recessed led spotlight adopt integrated die casting lamp body design. Flexible replacement of refector to reach different application effect.

Application: fashion shop, jewelry display and other high end accent lighting areas.



Symmetrical







FS5207

Color selection
B S W

FS5207-20




FS5207A-20




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5207-20 Max.20W	20W	DC500mA	2700K	1400lm	CRI90	-30°C+40°C
	20W	DC500mA	3000K	1600lm	CRI90	-30°C+40°C
	20W	DC500mA	4000K	1850lm	CRI90	-30°C+40°C
	20W	DC500mA	5000K	2100lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac

FS5207-15



FS5207A-15




	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5207-15 Max.15W	15W	DC350mA	2700K	1090lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1220lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1350lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1425lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac


FS5207

Color selection
B S W

FS5207-08



FS5207A-08



	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS5207-08 Max.8W	7W	DC200mA	2700K	580lm	CRI90	-30°C+40°C
	7W	DC200mA	3000K	650lm	CRI90	-30°C+40°C
	7W	DC200mA	4000K	720lm	CRI90	-30°C+40°C
	7W	DC200mA	5000K	760lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac




FS1090

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1090-05 Max.5W	4.5W	DC1000mA	2700K	350lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	3000K	380lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	4000K	420lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	5000K	470lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option









	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1090-06 Max.6W	6W	DC1350mA	2700K	420lm	CRI90	-30°C+40°C
	6W	DC1350mA	3000K	470lm	CRI90	-30°C+40°C
	6W	DC1350mA	4000K	540lm	CRI90	-30°C+40°C
	6W	DC1350mA	5000K	605lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option




FS1090

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1090A-05 Max.5W	4.5W	DC1000mA	2700K	350lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	3000K	380lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	4000K	420lm	CRI90	-30°C+40°C
	4.5W	DC1000mA	5000K	470lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option









	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1090A-06 Max.6W	6W	DC1350mA	2700K	420lm	CRI90	-30°C+40°C
	6W	DC1350mA	3000K	470lm	CRI90	-30°C+40°C
	6W	DC1350mA	4000K	540lm	CRI90	-30°C+40°C
	6W	DC1350mA	5000K	605lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option




FS1091

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1091-09 Max.9W	7.5W	DC200mA	2700K	635lm	CRI90	-30°C+40°C
	7.5W	DC200mA	3000K	712lm	CRI90	-30°C+40°C
	7.5W	DC200mA	4000K	792lm	CRI90	-30°C+40°C
	7.5W	DC200mA	5000K	886lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



FS1091A







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1091A-09 Max.9W	7.5W	DC200mA	2700K	635lm	CRI90	-30°C+40°C
	7.5W	DC200mA	3000K	712lm	CRI90	-30°C+40°C
	7.5W	DC200mA	4000K	792lm	CRI90	-30°C+40°C
	7.5W	DC200mA	5000K	886lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option




FS1092

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1092-09 Max.9W	7.5W	DC200mA	2700K	635lm	CRI90	-30°C+40°C
	7.5W	DC200mA	3000K	712lm	CRI90	-30°C+40°C
	7.5W	DC200mA	4000K	792lm	CRI90	-30°C+40°C
	7.5W	DC200mA	5000K	886lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



FS1092A







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1092A-09 Max.9W	7.5W	DC200mA	2700K	635lm	CRI90	-30°C+40°C
	7.5W	DC200mA	3000K	712lm	CRI90	-30°C+40°C
	7.5W	DC200mA	4000K	792lm	CRI90	-30°C+40°C
	7.5W	DC200mA	5000K	886lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option




FS1093
SERIES

Color selection
W







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1093-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



CE CB SMD Alu. IES IP40 F







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1093A-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



CE CB SMD Alu. IES IP40 F


www.fansenlamp.com

FS1094
SERIES

Color selection
W







	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1094-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



CE CB COB Alu. IES IP40 F








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS1094A-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C


- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac
- Reflector color option



CE CB SMD Alu. IES IP40 F







Model	P	H
FS1065-09	Max.9W	97
FS1065-15	Max.15W	112


Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)/FS1065-15
- 2700K/975lm CRI90
- 3000K/1140lm CRI90
- 4000K/1275lm CRI80
- 5000K/1380lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Frosted Glass


Clear Glass


Beam angle



Color selection

B | S | W

LED WALL WASH SERIES

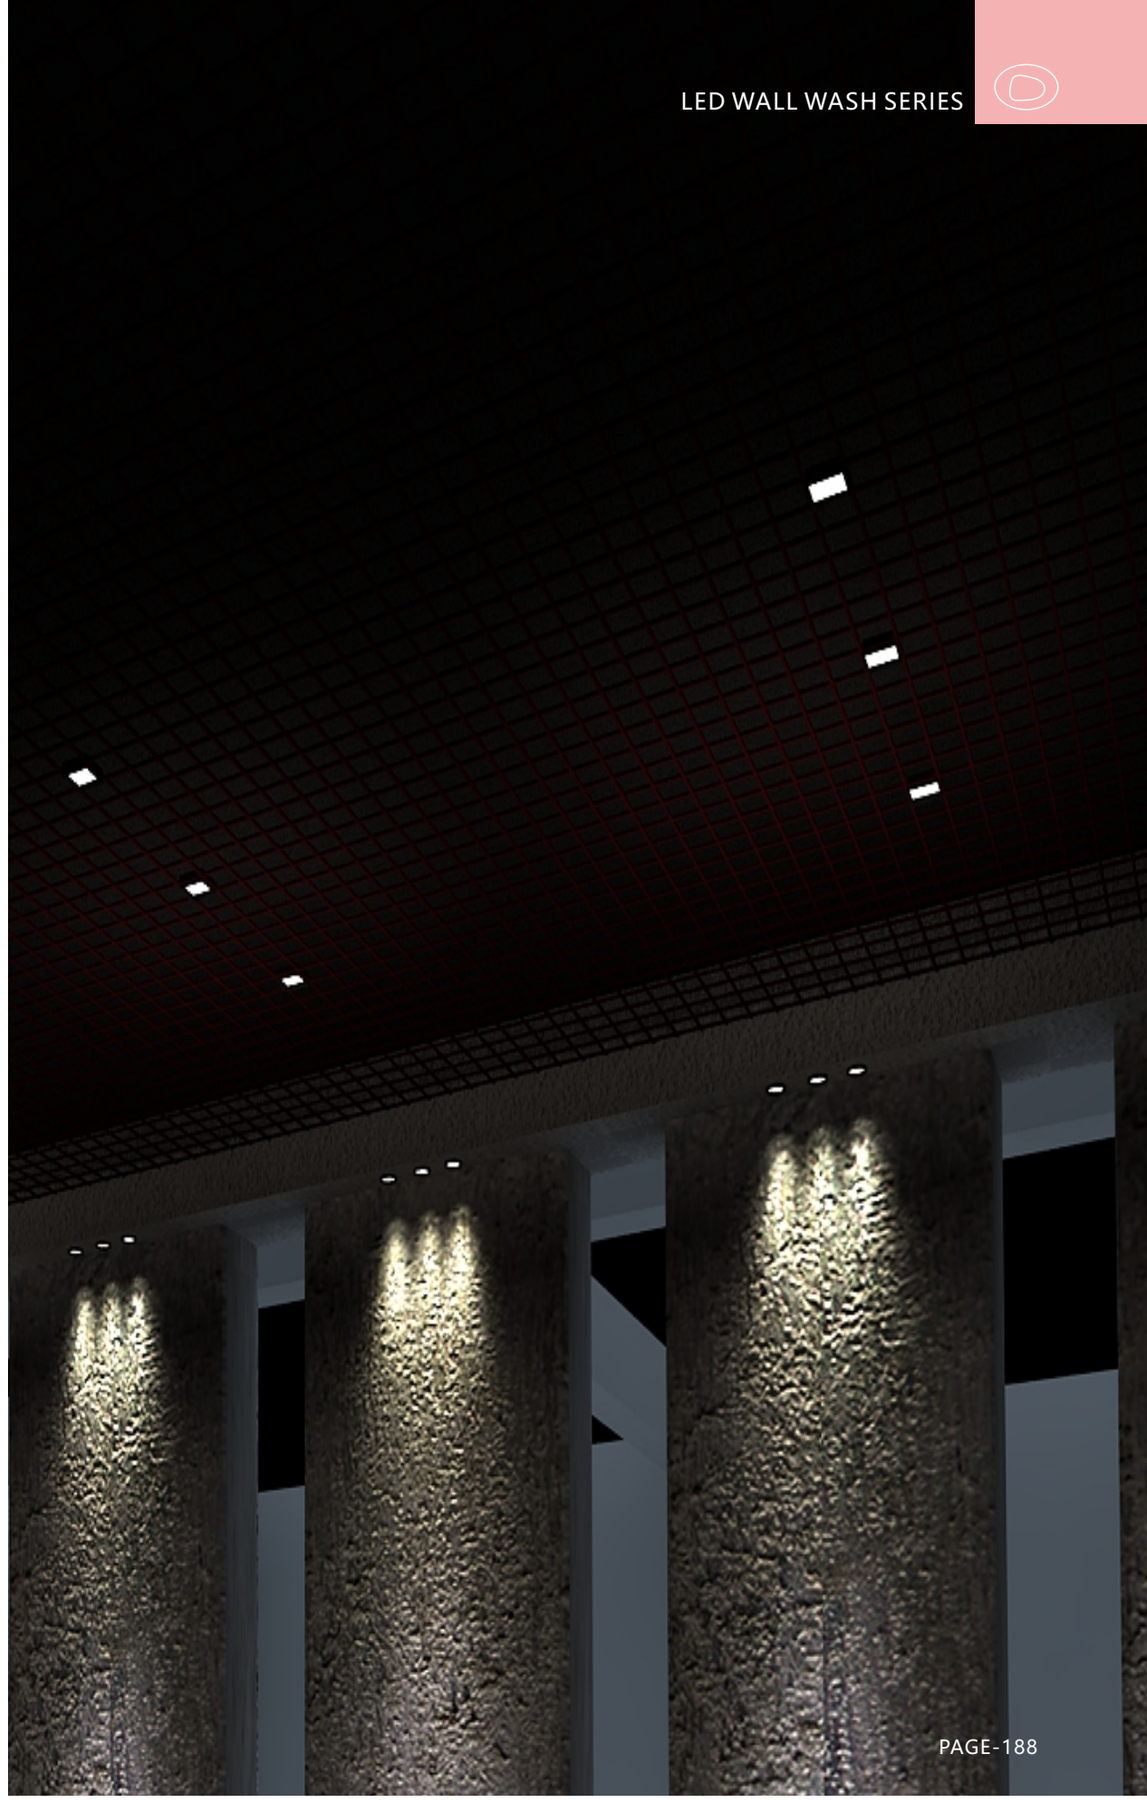

LED HOUSEHOLD SOTRE & RECESSED GRILLE LIGHT




360°rotatable can also adjustable, to meet different requirement of lighting.
Anti-Glare & focuse light design, specialize for furniture sotore as well as Exclusive Shop.
Round & Square shape with all wattage series included to meet the different design requirement.










FS1062-13
Max.13W


Operating Temp. : -30℃ + 40℃
11W COB chip (DC300mA)
- 2700K/910lm CRI90
- 3000K/950lm CRI90
- 4000K/1066lm CRI80
- 5000K/1105lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection








FS1062-20
Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1400lm CRI90
- 3000K/1430lm CRI90
- 4000K/1600lm CRI80
- 5000K/1650lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection








FS1062-30
Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2100lm CRI90
- 3000K/2190lm CRI90
- 4000K/2350lm CRI80
- 5000K/2450lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection



Recess Grille downlight with quality aluminum body in powder-coated, with multiple reflecting angles, excellent heatsink capability to minimize degradation of the lumens. remote LED driver.
Application:star hotel, museum, exhibition hall, shopping malls, brandchain stores and so on.

LED HOUSEHOLD SOTRE & RECESSED GRILLE LIGHT SERIES





FS2018A-35

Max.2×35W


Operating Temp. : -30℃ + 40℃
2×32W COB chip (DC800mA)
- 2700K/4915lm CRI90
- 3000K/5390lm CRI90
- 4000K/5950lm CRI80
- 5000K/6720lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Frosted Glass

Clesr Glass


Beam angle



Color selection

B | S | W





FS2019A-35

Max.35W


Operating Temp. : -30℃ + 40℃
32W COB chip (DC800mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3080lm CRI80
- 5000K/3360lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Frosted Glass


Clesr Glass


Beam angle




Color selection

B | S | W








FS2022A-15

Max.2*15W


Operating Temp. : -30℃ + 40℃
2*13W COB chip (DC350mA)
- 2700K/2100lm CRI90
- 3000K/2160lm CRI90
- 4000K/2500lm CRI90
- 5000K/2640lm CRI90


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection



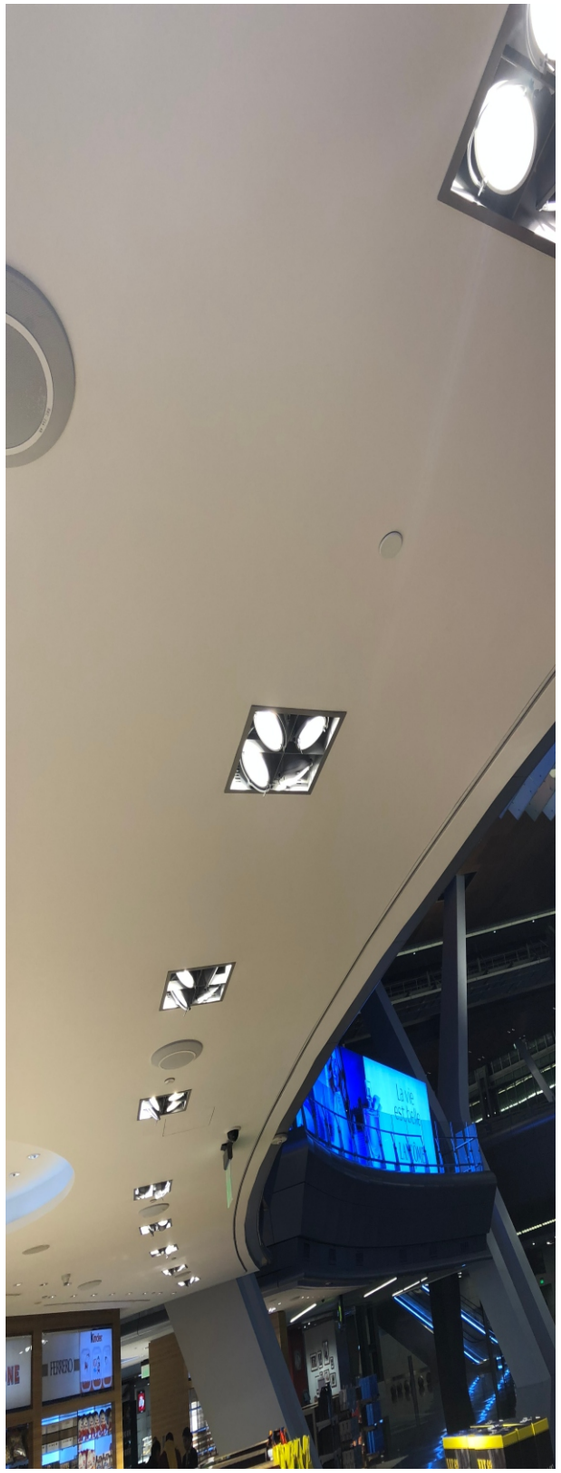






FS2023A-15

Max.15W

Operating Temp. : -30℃ + 40℃
13W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1080lm CRI90
- 4000K/1250lm CRI90
- 5000K/1320lm CRI90

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection








FS2027A-13

Max.13W


Operating Temp. : -30℃ + 40℃
11W COB chip (DC300mA)
- 2700K/910lm CRI90
- 3000K/950lm CRI90
- 4000K/1066lm CRI80
- 5000K/1105lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection







FS2029-16

Max.16W

Operating Temp. : -30℃ + 40℃
14W COB chip (DC700mA)
- 2700K/1104lm CRI80
- 3000K/1168lm CRI80
- 4000K/1248lm CRI80
- 5000K/1280lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle:7° / 14° / 25° / 46° / 9+41°



Color selection

B | S | W





FS2030-30

Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2070lm CRI80
- 3000K/2250lm CRI80
- 4000K/2350lm CRI80
- 5000K/2460lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle:7° / 14° / 25° / 46° / 9+41°



Color selection

B | S | W

LED HOUSEHOLD SOTRE & RECESSED GRILLE LIGHT SERIES

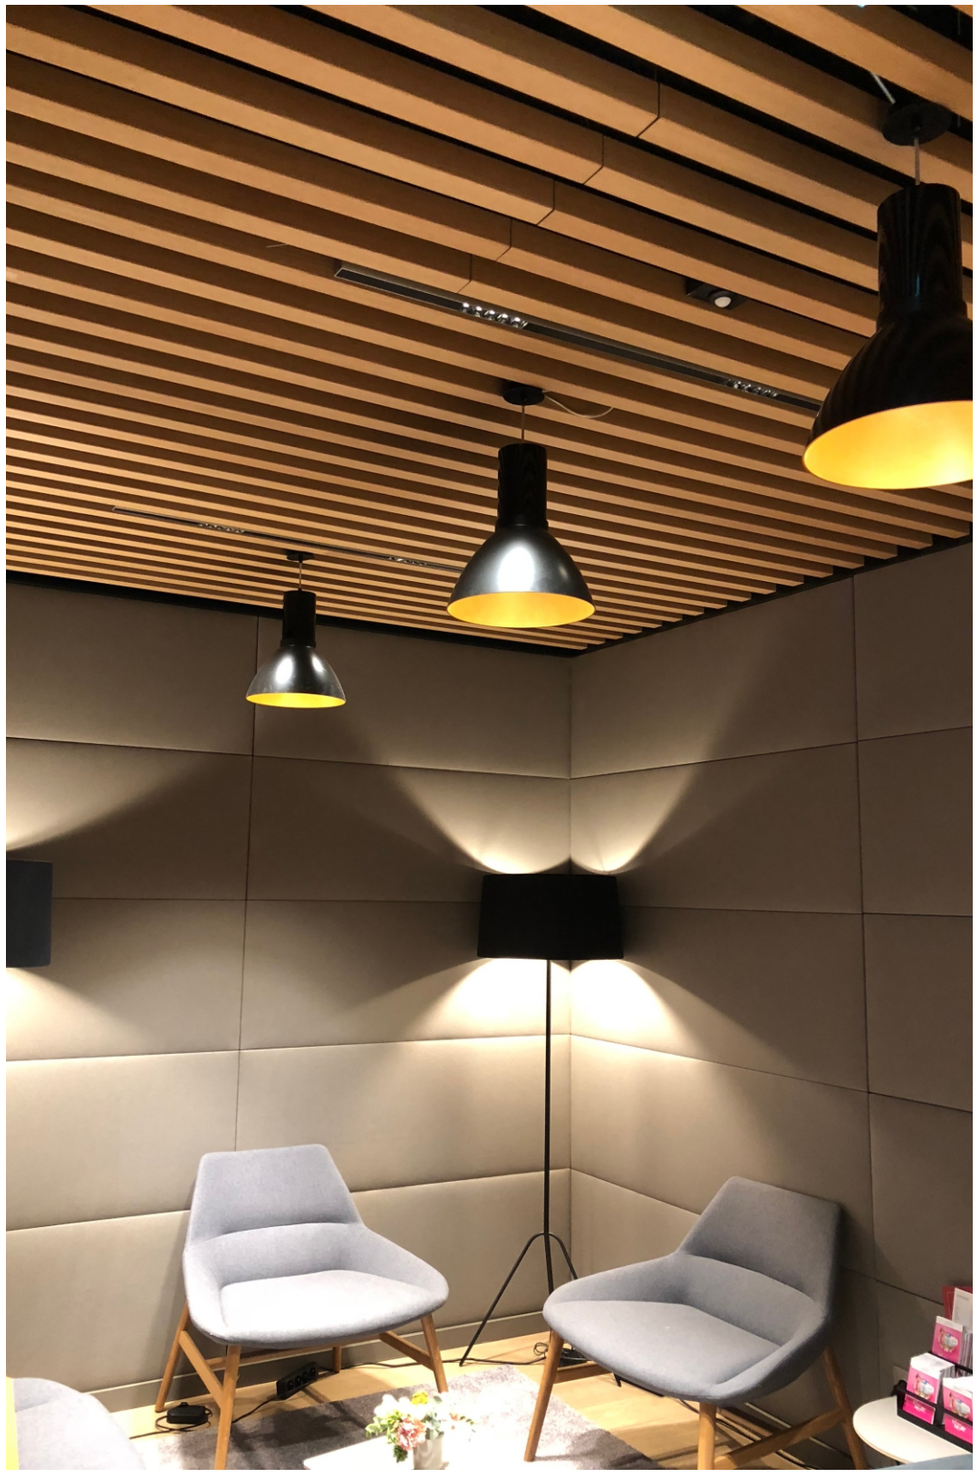







FS2027-13

Max.13W


Operating Temp. : -30℃ + 40℃
11W COB chip (DC300mA)
- 2700K/897lm CRI90
- 3000K/936lm CRI90
- 4000K/1050lm CRI80
- 5000K/1066lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Frosted Glass


Clear Glass


Beam angle



Color selection

B | S | W





FS2039-30

Max.2*15W


Operating Temp. : -30℃ + 40℃
2*13W COB chip (DC350mA)
- 2700K/2100lm CRI90
- 3000K/2160lm CRI90
- 4000K/2500lm CRI90
- 5000K/2640lm CRI90

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Frosted Glass


Clear Glass

Beam angle



Color selection

B | S | W


LED HOUSEHOLD SOTRE & RECESSED GRILLE LIGHT SERIES

FS2040
SERIES

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS2040-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac









	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS2040-30 Max.30W	30W	DC700mA	2700K	2107lm	CRI90	-30°C+40°C
	30W	DC700mA	3000K	2340lm	CRI90	-30°C+40°C
	30W	DC700mA	4000K	2645lm	CRI90	-30°C+40°C
	30W	DC700mA	5000K	2943lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac




FS2041
SERIES

Color selection
W








	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS2041-15 Max.15W	15W	DC350mA	2700K	1050lm	CRI90	-30°C+40°C
	15W	DC350mA	3000K	1170lm	CRI90	-30°C+40°C
	15W	DC350mA	4000K	1305lm	CRI90	-30°C+40°C
	15W	DC350mA	5000K	1440lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac









	Power	LED InPut	CCT	Lm	CRI	Operating Temp
FS2041-30 Max.30W	30W	DC700mA	2700K	2107lm	CRI90	-30°C+40°C
	30W	DC700mA	3000K	2340lm	CRI90	-30°C+40°C
	30W	DC700mA	4000K	2645lm	CRI90	-30°C+40°C
	30W	DC700mA	5000K	2943lm	CRI80	-30°C+40°C

- Remote Driver: AC100-240V 50/60Hz
- Driver performance: Non-dimmable/dimmable
- Dimmer: DALI/0~10v/Triac






Ip65 Recessed mounted circular LED downlight luminaire with die-cast aluminium housing in white powder coating finish, specially designed heatsink, anti glare diffuser and separate energy efficient electronic driver.
Application:living rooms, corridors, shops, shopping mall, hotel.

CE CB COB Alu. IES IP40





FS3033-20

Max.20W

Operating Temp. : -30℃ + 40℃
SMD2835*112PCS (DC500mA)
- 2700K/1425lm CRI90
- 3000K/1520lm CRI90
- 4000K/1710lm CRI80
- 5000K/1900lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3032-15

Max.15W

Operating Temp. : -30℃ + 40℃
SMD2835*84PCS (DC350mA)
- 2700K/1125lm CRI90
- 3000K/1200lm CRI90
- 4000K/1350lm CRI80
- 5000K/1500lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3031-10

Max.10W

Operating Temp. : -30℃ + 40℃
SMD2835*54PCS (DC300mA)
- 2700K/750lm CRI90
- 3000K/800lm CRI90
- 4000K/900lm CRI80
- 5000K/1000lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle



Color selection

B | S | W




LED DOWNLIGHT SERIES



Recessed mounted circular LED down light luminaire with die-cast aluminium housing in white powder coating finish, specially designed heatsink, anti glare diffuser and separate energy efficient electronic.

Application: living rooms, corridors, shops, shopping mall, hotel. driver.





FS3002-24

Max.24W

Operating Temp. : -30℃ + 40℃
SMD2835*140PCS (DC700mA)
- 2700K/1800lm CRI90
- 3000K/1920lm CRI90
- 4000K/2160lm CRI80
- 5000K/2400lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3001-19

Max.19W

Operating Temp. : -30℃ + 40℃
SMD2835*112PCS (DC700mA)
- 2700K/1425lm CRI90
- 3000K/1520lm CRI90
- 4000K/1710lm CRI80
- 5000K/1900lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3022-15

Max.15W

Operating Temp. : -30℃ + 40℃
SMD2835*84PCS (DC350mA)
- 2700K/1125lm CRI90
- 3000K/1200lm CRI90
- 4000K/1350lm CRI80
- 5000K/1500lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3021-13

Max.13W

Operating Temp. : -30℃ + 40℃
SMD2835*72PCS (DC300mA)
- 2700K/975lm CRI90
- 3000K/1040lm CRI90
- 4000K/1170lm CRI80
- 5000K/1300lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W





FS3020-10

Max.10W

Operating Temp. : -30℃ + 40℃
SMD2835*54PCS (DC300mA)
- 2700K/750lm CRI90
- 3000K/800lm CRI90
- 4000K/900lm CRI80
- 5000K/1000lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali


Beam angle



Color selection

B | S | W






FS3023-07

Max.7W

Operating Temp. : -30℃ + 40℃
SMD2835*36PCS (DC300mA)
- 2700K/525lm CRI90
- 3000K/560lm CRI90
- 4000K/630lm CRI80
- 5000K/700lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac/Dali

Beam angle




Color selection

B | S | W

LED DOWNLIGHT SERIES



LED SURFACE/ SUSPENSION LAMP SERIES





Selected color



Simple and elegant designed LED pendant Light with aluminium die-cast housing, specially designed heatsink for good dissipation to minimize degradation of the lumens.
Application:household decorative lighting, shops, hotels bars, coffee shops.









FS3036-15

Max.15W

Operating Temp. : -30℃ +40℃
13.5W COB chip (DC350mA)
- 2700K/990lm CRI90
- 3000K/1110lm CRI90
- 4000K/1255lm CRI80
- 5000K/1390lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac/0-10V/Dali






Selected color



Beam angle



Color selection

B | S | W




FS3036-06

Max.6W

Operating Temp. : -30℃ +40℃
5W COB chip (DC500mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac






Selected color



Beam angle



Color selection

B | S | W



FS3035-05

Max.5W


Operating Temp. : -30℃ +40℃
4.5W SMD chip (DC500mA)
- 2700K/300lm CRI90
- 3000K/330lm CRI90
- 4000K/375lm CRI80
- 5000K/425lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac





Beam angle



Color selection

B | S | W




FS4027C-20

Max.20W


Operating Temp. : -30℃ +40℃
4×5W SMD chip (DC500mA)
- 2700K/1200lm CRI90
- 3000K/1320lm CRI90
- 4000K/1500lm CRI80
- 5000K/1700lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac/0-10V/Dali






Beam angle



Color selection

B | S | W






FS3020-40

Max.40W

Operating Temp. : -30℃ + 40℃
35W COB chip (DC1000mA)
- 2700K/2815lm CRI90
- 3000K/3120lm CRI90
- 4000K/3520lm CRI80
- 5000K/3925lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac


Beam angle



Color selection

B | S | W






FS4010B-18

Max.18W

Operating Temp. : -30℃ + 40℃
16W COB chip (DC450mA)
- 2700K/1260lm CRI90
- 3000K/1405lm CRI90
- 4000K/1584lm CRI80
- 5000K/1766lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac


Beam angle



Color selection

B | S | W






FS3025-18

Max.18W

Operating Temp. : -30℃ + 40℃
16W COB chip (DC450mA)
- 2700K/1242lm CRI90
- 3000K/1260lm CRI90
- 4000K/1422lm CRI80
- 5000K/1530lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac


Beam angle




Color selection

B | S | W







FS4027A-20

Max.20W


Operating Temp. : -30℃ + 40℃

4× (4.5W SMD) chip (DC500mA)

- 2700K/1200lm CRI90
- 3000K/1300lm CRI90
- 4000K/1500lm CRI80
- 5000K/1710lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W





FS4028A-30

Max.30W


Operating Temp. : -30℃ + 40℃

6× (4.5W SMD) chip (DC500mA)

- 2700K/1800lm CRI90
- 3000K/1950lm CRI90
- 4000K/2242lm CRI80
- 5000K/2550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W





FS4027D-20

Max.20W


Operating Temp. : -30℃ + 40℃

4×5W SMD chip (DC500mA)

- 2700K/1200lm CRI90
- 3000K/1320lm CRI90
- 4000K/1500lm CRI80
- 5000K/1700lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W





FS3038-20

Max.20W


Operating Temp. : -30℃ + 40℃

4×5W SMD chip (DC500mA)

- 2700K/1200lm CRI90
- 3000K/1320lm CRI90
- 4000K/1500lm CRI80
- 5000K/1700lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W






FS1078A-15

Max.15W

Operating Temp. : -30℃ + 40℃
5×2.5W SMD chip (DC700mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle



Color selection

B | S | W





FS3035A-05


Max.5W

Operating Temp. : -30℃ + 40℃
4.5W SMD chip (DC500mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic




Beam angle



Color selection

B | S | W





FS3036A-15

Max.15W

Operating Temp. : -30℃ + 40℃
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Dali/0-10V/Triac



Selected color



Beam angle





Color selection

B | S | W



FS3036A-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W SMD chip (DC500mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI70


Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic



Selected color



Beam angle






Color selection

B | S | W






FS4019A-30

Max.30W

Operating Temp. : -30℃ + 40℃
26W COB chip (DC700mA)
- 2700K/2107lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI80
- 5000K/2943lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic


Beam angle



Color selection

B | S | W






FS4019A-20

Max.20W

Operating Temp. : -30℃ + 40℃
17.5W COB chip (DC500mA)
- 2700K/1405lm CRI90
- 3000K/1600lm CRI90
- 4000K/1850lm CRI80
- 5000K/2100lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Traic


Beam angle



Color selection

B | S | W






FS4019A-15

Max.15W

Operating Temp. : -30℃ + 40℃
13W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1370lm CRI80
- 5000K/1550lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic


Beam angle



Color selection

B | S | W






FS4019A-10

Max.10W

Operating Temp. : -30℃ + 40℃
8.5W COB chip (DC250mA)
- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI80
- 5000K/1020lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic


Beam angle



Color selection

B | S | W






FS4019A-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI80
- 5000K/605lm CRI70

Inbuilt Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Traic

Beam angle




Color selection

B | S | W








Model	P	H	H1
FS4010D-12	Max.12W	143	108
FS4010D-18	Max.18W	163	128
FS4010D-22	Max.22W	173	138

Operating Temp. : -30℃ + 40℃
16W COB chip (DC450mA) / FS4010D-18
- 2700K/1260lm CRI90
- 3000K/1405lm CRI90
- 4000K/1584lm CRI80
- 5000K/1766lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac


Beam angle



Color selection

B | S | W






FS1069-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle




Color selection

B | S | W





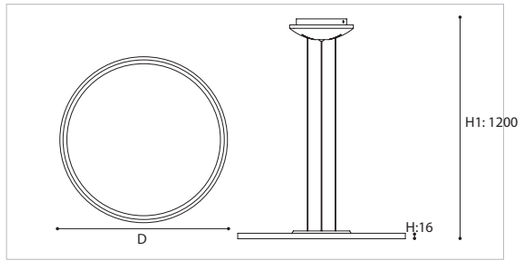

Model	P	D	Flux
L05402-24	Max.24W	Φ300	1900
L05403-30	Max.30W	Φ400	2400
L05404-40	Max.40W	Φ500	3200
L05405-48	Max.48W	Φ600	3840
L05406-72	Max.72W	Φ800	5760
L05408-96	Max.96W	Φ1000	7680

Operating Temp. : -30℃~ 40℃

SMD Chip (DC450mA) / L05402-24

3000K/1727lm CRI90

4000K/1900lm CRI80

Beam angle




B | S | W

IP20

SURFACE LAMP SERIES



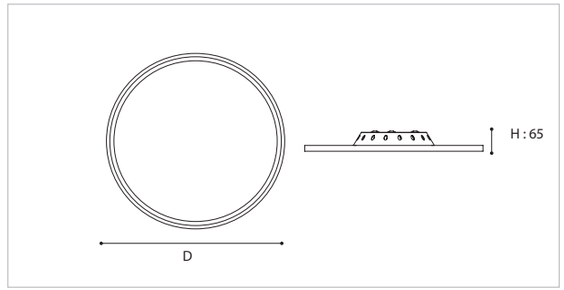

Model	P	D	Flux
L05403-24/S	Max.24W	Φ300	1900
L05403-30/S	Max.30W	Φ400	2400
L05404-40/S	Max.40W	Φ500	3200
L05405-48/S	Max.48W	Φ600	3840
L05406-72/S	Max.72W	Φ800	5760
L05408-96/S	Max.96W	Φ1000	7680

Operating Temp. : -30℃~ 40℃

SMD Chip (DC450mA) / L05402-24/S


3000K/1727lm CRI90

4000K/1900lm CRI80

Beam angle



B | S | W

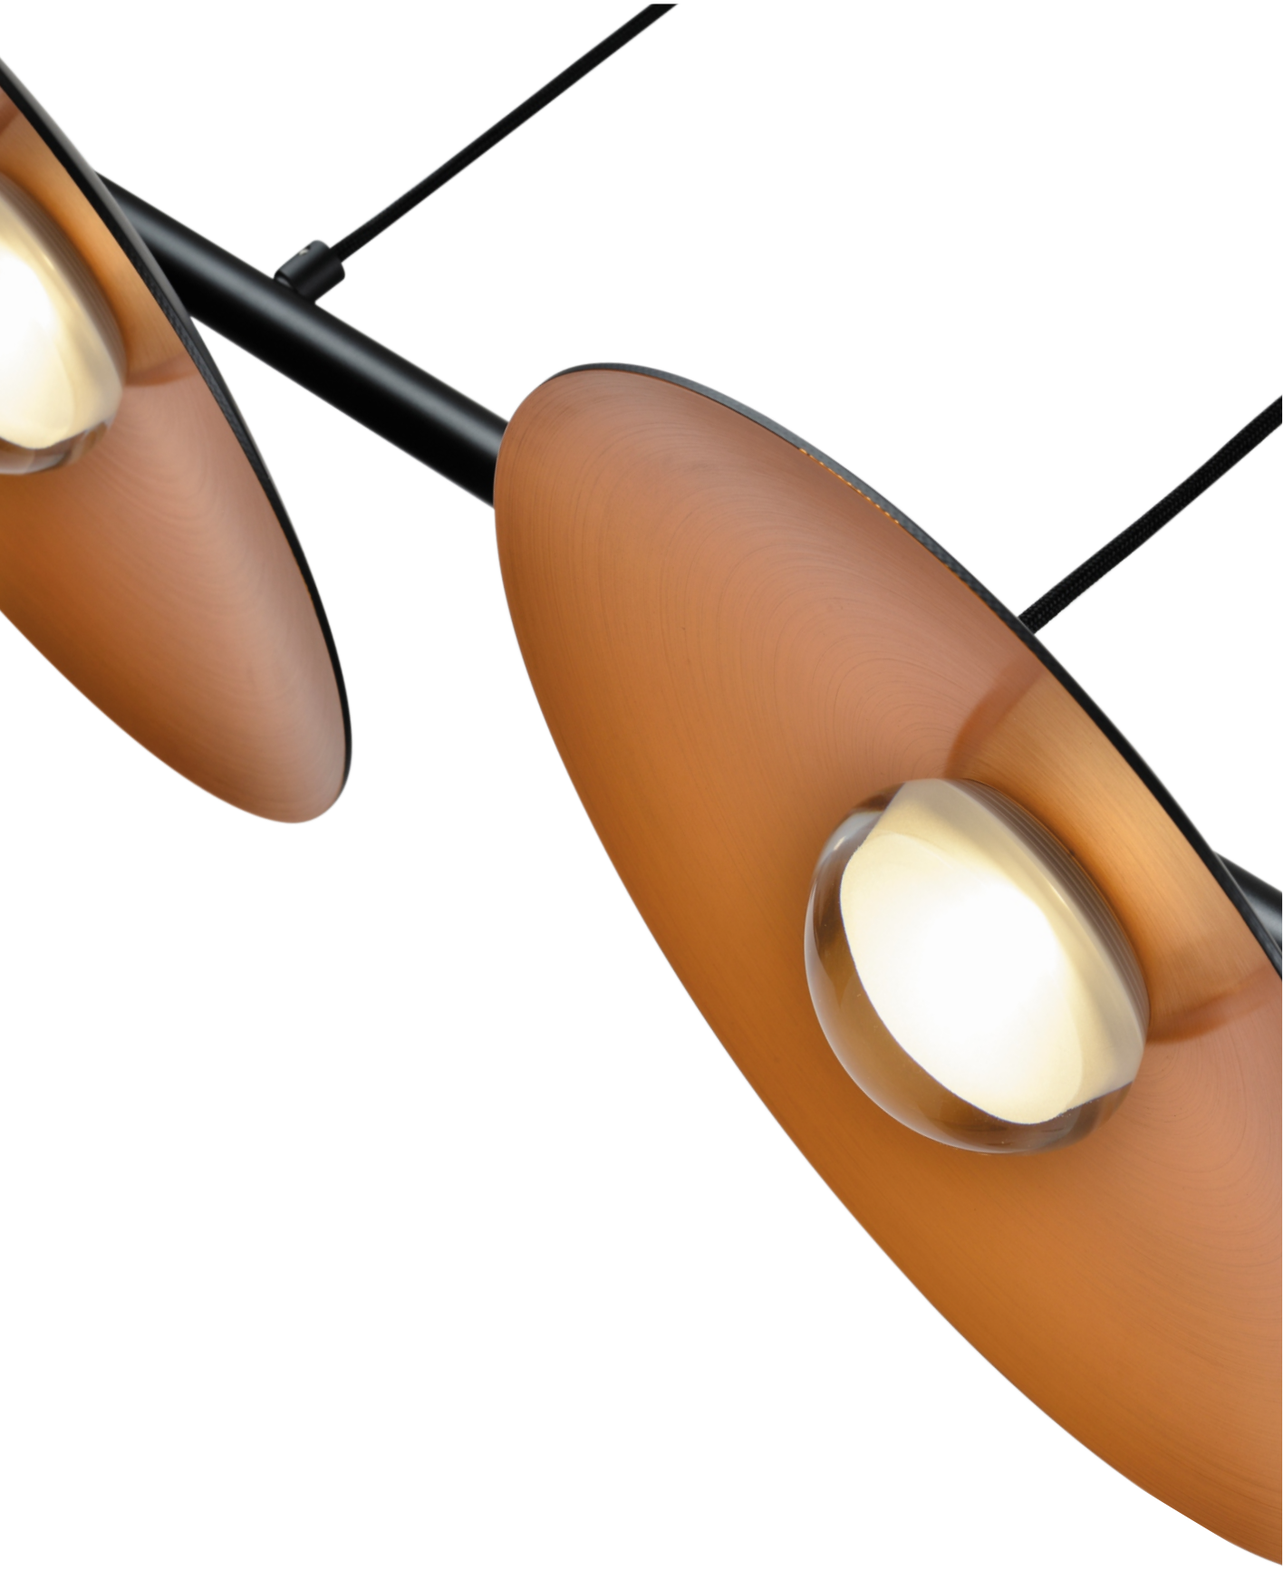


LED DROPLINE LAMP


Ultra-narrow trim with deep anti-glare design fixture make your decoration effect more artistic and modern ,simple ,elegant unique application.
Square and round for selection.

Application: fashion shop, jewelry display and other high end accent lighting areas.


FS1001Z21



FS1001Z22



FS1001Z23



FS1001Z21 20W
L660xW280xH1500mm
600mm (Pendant lamp)
Black

120°



FS1001Z22

30W
L1040xW280xH1500mm
600mm (Pendant lamp)
Black

120°



FS1001Z23

40W
L1420xW280xH1500mm
600mm (Pendant lamp)
Black

120°




FS2001Z


LED SURFACE MOUNTED PENDANT LIGHT SERIES

Led surface mounted pendant light with high quality die casting alumnaries. simple design structure make elegant application visual effect and the efficiency of heat dissipation


FS1001Z12




FS1001Z11




FS1001Z02




FS1001Z01




FS2001Z12




FS2001Z11



FS2001Z02



FS2001Z01





FS1001Z12
20W
Ø380xH1500mm
1200mm (Pendant lamp)
Black
120°

FS2001Z12
20W
Ø380xH113mm
Ceiling lamp
Black
120°

FS1001Z02
15W
Ø280xH1500mm
1200mm (Pendant lamp)
Black
120°

FS2001Z02
15W
Ø280xH98mm
Ceiling lamp
Black
120°

FS1001Z11
20W
Ø380xH1500mm
1200mm (Pendant lamp)
Black
90°

FS2001Z11
20W
Ø380xH110mm
Ceiling lamp
Black
90°

FS1001Z01
20W
Ø280xH1500mm
1200mm (Pendant lamp)
Black
90°

FS2001Z01
20W
Ø280xH110mm
Ceiling lamp
Black
90°






FS3029-09

Max.9W

Operating Temp. : -30℃ + 40℃
7.5W COB chip (DC200mA)
- 2700K/630lm CRI90
- 3000K/702lm CRI90
- 4000K/783lm CRI80
- 5000K/864lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac


Beam angle



Color selection

B | S | W






Model	P	H
FS3019-40	Max.40W	185
FS4010C-12	Max.12W	108
FS4010C-18	Max.18W	128
FS4010C-22	Max.22W	138

Operating Temp. : -30℃ + 40℃
37W COB chip (DC1000mA) / FS3019-40
- 2700K/2815lm CRI90
- 3000K/3120lm CRI90
- 4000K/3520lm CRI80
- 5000K/3925lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac


Beam angle



Color selection

B | S | W





FS3024-18 / FS3024-25

Max.25W

Operating Temp. : -30℃ + 40℃
16W COB chip (DC450mA) / FS3024-18
- 2700K/1242lm CRI90
- 3000K/1260lm CRI90
- 4000K/1422lm CRI80
- 5000K/1530lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac

Beam angle



Color selection

B | S | W



LED SURFACE/ SUSPENSION LAMP SERIES

Simple and elegant designed LED pendant Light with hight quality aluminum body, specially designed heatsink for good dissipation to minimize degradation of the lumens.

Application: household decorative lighting, shops, hotels bars, coffee shops.

FS4050A
SERIES

Color selection
B S W



FS4050A-35
Max.35W

Operating Temp. : -30°C ＋ 40°C
32W COB chip (DC850mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3100lm CRI90
- 5000K/3400lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical








FS4050A-30
Max.30W

Operating Temp. : -30°C ＋ 40°C
26W COB chip (DC600mA)
- 2700K/2107lm CRI90
- 3000K/2340lm CRI90
- 4000K/2645lm CRI90
- 5000K/2943lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical





FS4050A
SERIES

Color selection
B S W



FS4050A-15
Max.15W

Operating Temp. : -30°C ＋ 40°C
13.5W COB chip (DC350mA)
- 2700K/1050lm CRI90
- 3000K/1200lm CRI90
- 4000K/1390lm CRI90
- 5000K/1580lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical







FS4050A-07
Max.7W

Operating Temp. : -30°C ＋ 40°C
5W COB chip (DC150mA)
- 2700K/420lm CRI90
- 3000K/470lm CRI90
- 4000K/540lm CRI90
- 5000K/605lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical






FS3040
SERIES

Color selection
B S W



Selected reflector




Symmetrical Asymmetric optics


FS3040-35
Max.35W

Operating Temp. : -30°C ＋ 40°C
32W COB chip (DC850mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3080lm CRI90
- 5000K/3360lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali


Symmetrical Asymmetric optics







Selected reflector





FS3040-24
Max.24W

Operating Temp. : -30°C ＋ 40°C
24W COB chip (DC600mA)
- 2700K/1750lm CRI90
- 3000K/1950lm CRI90
- 4000K/2200lm CRI90
- 5000K/2340lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical Asymmetric optics







FS3040
SERIES

Color selection
B S W



Selected reflector





FS3040-10
Max.10W

Operating Temp. : -30°C ＋ 40°C
10W COB chip (DC250mA)
- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI90
- 5000K/1020lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0～10v/Triac/Dali

Symmetrical Asymmetric optics








FS3040A
SERIES

Color selection
B S W



Reflector color option



FS3040A-35
Max.35W

Operating Temp. : -30°C ~ 40°C
32W COB chip (DC850mA)
- 2700K/2450lm CRI90
- 3000K/2730lm CRI90
- 4000K/3080lm CRI90
- 5000K/3360lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle







Reflector color option



FS3040A-24
Max.24W

Operating Temp. : -30°C ~ 40°C
24W COB chip (DC600mA)
- 2700K/1750lm CRI90
- 3000K/1950lm CRI90
- 4000K/2200lm CRI90
- 5000K/2340lm CRI80

Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali

Beam angle





CE CB COB Alu. IES IP40

FS3040A
SERIES

Color selection
B S W



Reflector color option



FS3040A-10
Max.10W

Operating Temp. : -30°C ~ 40°C
10W COB chip (DC250mA)
- 2700K/700lm CRI90
- 3000K/800lm CRI90
- 4000K/930lm CRI90
- 5000K/1020lm CRI80


Internal Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0~10v/Triac/Dali


Beam angle






CE CB COB Alu. IES IP40

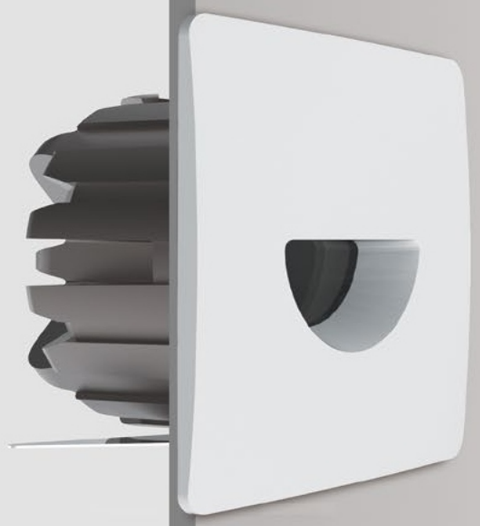

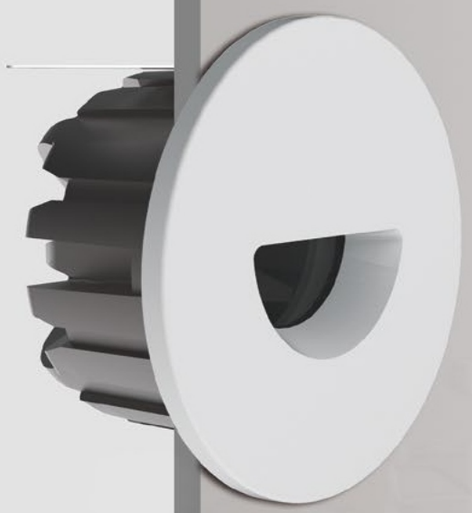

The shown LED light features a vertical aluminum shield, lamp head is delicately recessed at the wall, different light distribution available, like a thread of morning sunlight, very mysterious and romantic. It can be widely used in decoration of the building, stage, cultural places and so on.






FS5091-03
Max.3W

Operating Temp. : -30℃ + 40℃
2W COB chip (DC500mA)
- 2700K/213lm CRI80
- 3000K/234lm CRI80
- 4000K/258lm CRI80
- 5000K/291lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac


Beam angle




Color selection

B | S | W








FS5092-03
Max.3W

Operating Temp. : -30℃ + 40℃
2W COB chip (DC500mA)
- 2700K/213lm CRI80
- 3000K/234lm CRI80
- 4000K/258lm CRI80
- 5000K/291lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac

Beam angle



Color selection

B | S | W


FS5094-02 / FS5095-02

Max.3W

Operating Temp. : -30℃ + 40℃
2.7W COB chip (DC500mA)
- 2700K/213lm CRI80
- 3000K/234lm CRI80
- 4000K/258lm CRI80
- 5000K/291lm CRI70


Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: 0-10V/Triac

Beam angle



Color selection


B | S | W

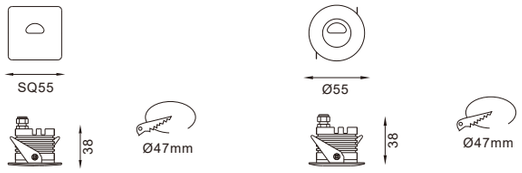






LED CORNER LIGHT SERIES

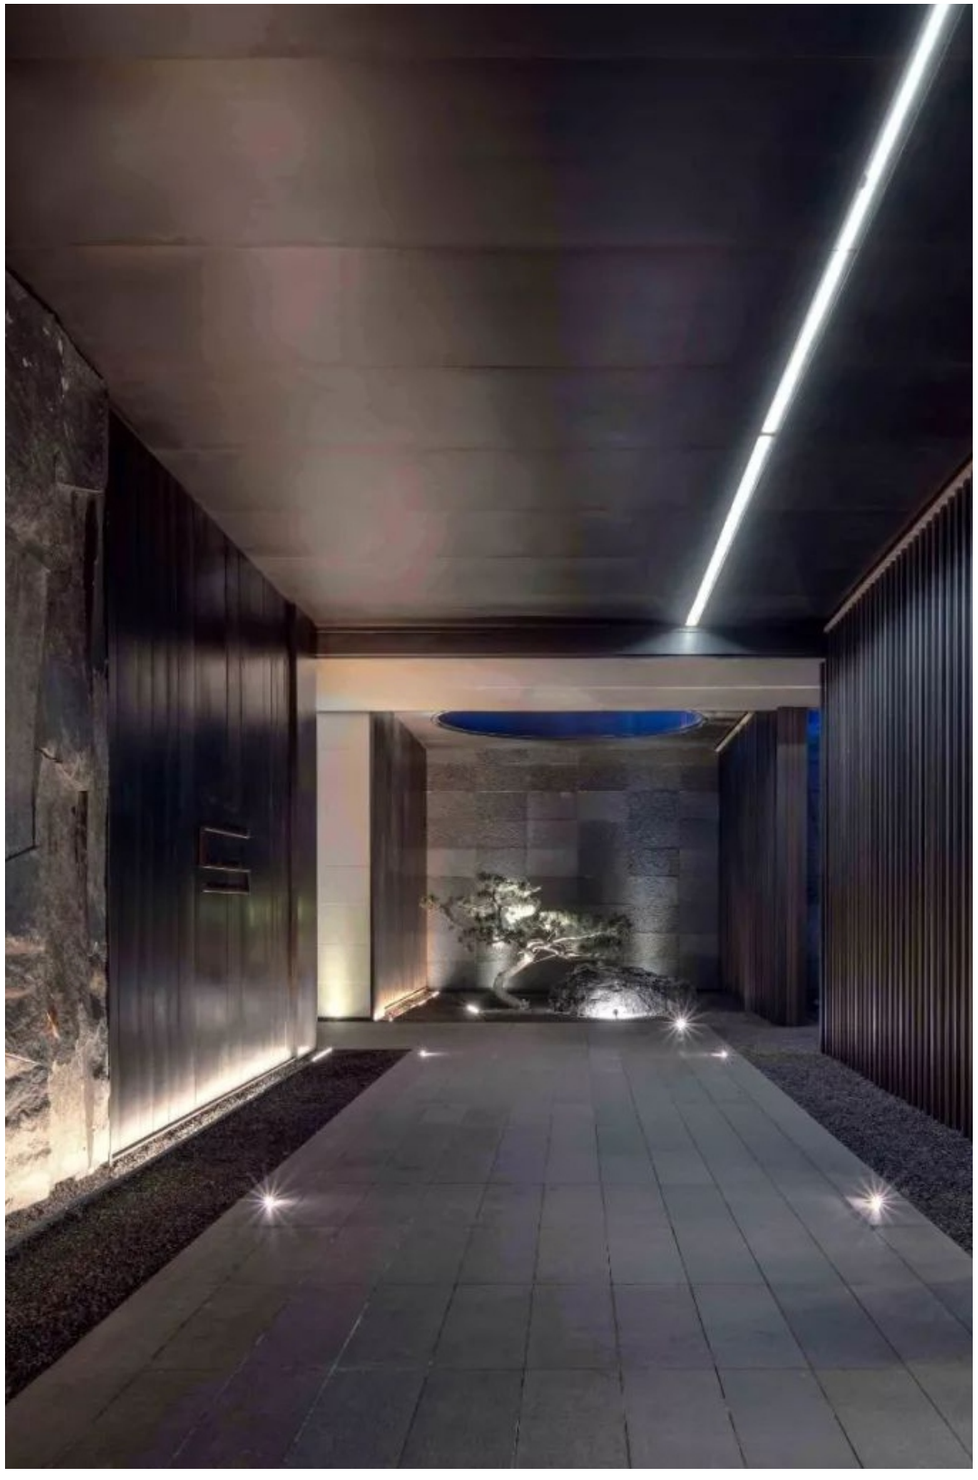








FS1078-30

Max.30W

Operating Temp. : -30℃ + 40℃
10×3W SMD chip (DC1000mA)
- 2700K/1800lm CRI80
- 3000K/1980lm CRI80
- 4000K/2250lm CRI80
- 5000K/2550lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0-10V/Triac


Beam angle



Color selection

B | S | W








FS1080-06

Max.6W

Operating Temp. : -30℃ + 40℃
5W COB chip (DC500mA)
- 2700K/350lm CRI90
- 3000K/430lm CRI90
- 4000K/500lm CRI80
- 5000K/510lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: DALI/0~10v/Triac


Beam angle




Color selection

B | S | W

Selected color




Installation steps

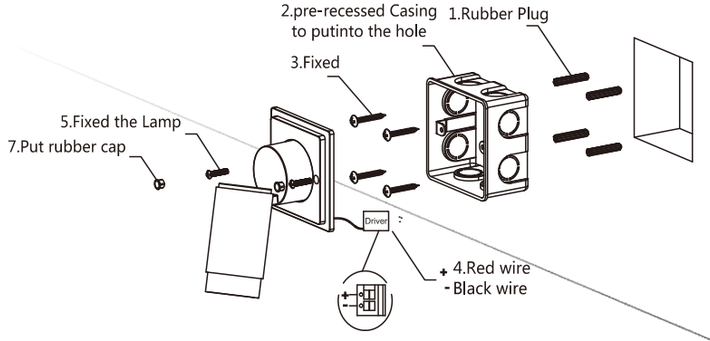



LED WALL LAMP SERIES






FS1082-30
Max.2*15W

Operating Temp. : -30℃ + 40℃
2*13W COB chip (DC700mA)
- 2700K/2100lm CRI90
- 3000K/2160lm CRI90
- 4000K/2500lm CRI80
- 5000K/2640lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac/0-10V

Beam angle




Color selection

B | S | W



High purity Alumimun housing,simple and beautiful shape
Up & down both side light output
Applied to balcony,stair,corridor and bedroom








FS1068-20
Max.20W

Operating Temp. : -30℃ +40℃
2×8.5W COB chip (DC500mA)
- 2700K/1156lm CRI90
- 3000K/1450lm CRI90
- 4000K/1560lm CRI80
- 5000K/1660lm CRI70

Remote Driver: AC100-240V 50/60Hz
Driver performance: Non-dimmable/dimmable
Dimmer: Triac、0-10V

Beam angle



Color selection

B | S | W




FS3004Z


LED WALL LAMP SERIES

Led surface mounted light with high quality die casting alumnaries.simple design structure make elegant application visual effect and the efficiency of heat dissipation


FS3004Z13
16W
Black



FS3004Z12
12W
Black



FS3004Z11
8W
3Black






FS3004Z


LED WALL LAMP SERIES

Led surface mounted light with high quality die casting alumnaries.simple design structure make elegant application visual effect and the efficiency of heat dissipation


FS3004Z03
16W
Black/Golden




FS3004Z02
12W
Black/Golden



FS3004Z01
8W
Black/Golden





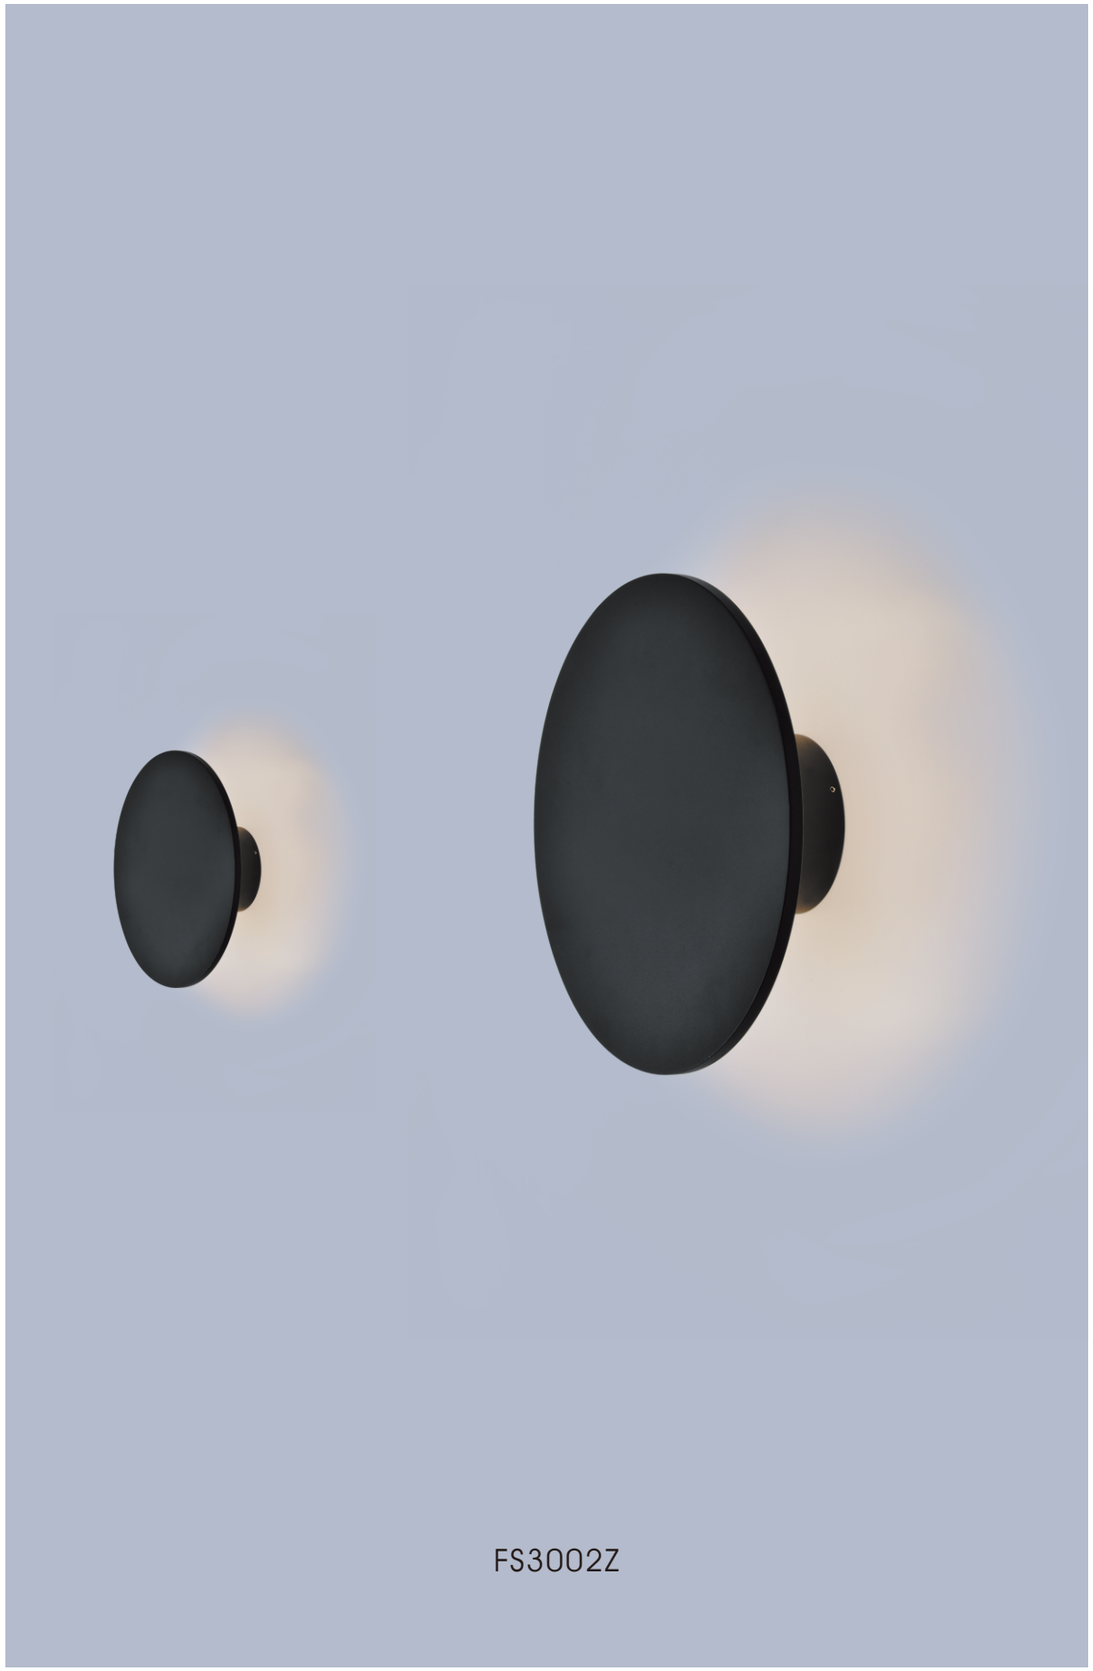


FS3002Z


LED WALL LAMP SERIES

Led surface mounted light with high quality die casting alumnaries.simple design structure make elegant application visual effect and the efficiency of heat dissipation


FS3002Z 03




FS3002Z 02



FS3002Z 01






FS3002Z 03

30W
Ø295xH100mm
Wall lamp
Black/White
IP65


120°



FS3002Z 02

12W
Ø178xH70mm
Wall lamp
Black/White
IP65


120°

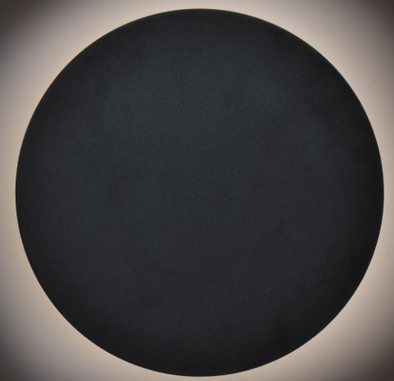

FS3002Z 01

6W
Ø118xH50mm
Wall lamp
Black/White
IP65

120°

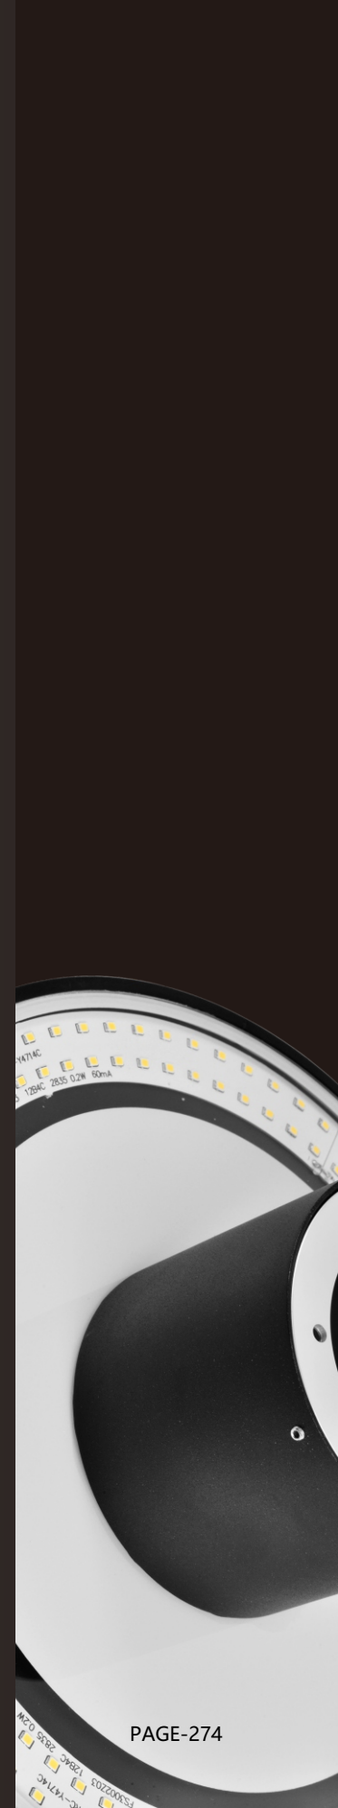




FS3001Z 01

LED WALL LAMP SERIES

Led surface mounted light with high quality die casting alumnaries.simple design structure make elegant application visual effect and the efficiency of heat dissipation

FS3001Z 01



FS3001Z 01

10W
L245xW192xH59mm
Black







TUBLIS



Tublis 3612-36
Max.36W

Ø86X1200 mm

Operating Temp. : -30℃ + 40°
36 W

2700K/3000lm	CRI90
3000K/3272lm	CRI90
4000K/3600lm	CRI80
5000K/3960lm	CRI70






Tublis 2406-24
Max.24W

Ø86X600 mm

Operating Temp. : -30℃ + 40°
24 W

2700K/2000lm	CRI90
3000K/2181lm	CRI90
4000K/2400lm	CRI80
5000K/2640lm	CRI70







Tublis 4515-45
Max.45W

Ø86X1500 mm

Operating Temp. : -30 ℃ + 40°
45 W

2700K/3750lm	CRI90
3000K/4090lm	CRI90
4000K/4500lm	CRI80
5000K/4950lm	CRI70



